




OIL ANALYSIS REPORT

Sample Rating Trend

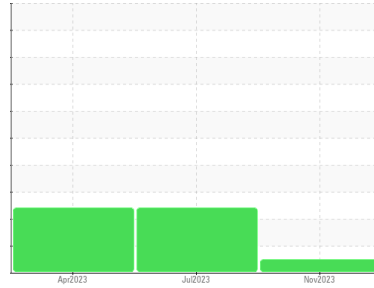

NORMAL



Machine Id
27264
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012028	KL0012007	KLM2339345
Sample Date	Client Info		14 Nov 2023	28 Jul 2023	09 Apr 2023
Machine Age	mls	Client Info	60590	58553	58554
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	18	19	82
Chromium	ppm	ASTM D5185m >20	<1	<1	2
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	3	11
Lead	ppm	ASTM D5185m >40	<1	0	1
Copper	ppm	ASTM D5185m >330	2	<1	5
Tin	ppm	ASTM D5185m >15	0	0	1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	68	62	65
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	64	63	80
Manganese	ppm	ASTM D5185m	<1	<1	2
Magnesium	ppm	ASTM D5185m	1026	1062	459
Calcium	ppm	ASTM D5185m	1091	1069	1676
Phosphorus	ppm	ASTM D5185m	1135	1065	1061
Zinc	ppm	ASTM D5185m	1370	1290	1345
Sulfur	ppm	ASTM D5185m	3640	4144	3877

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	5	13
Sodium	ppm	ASTM D5185m	3	3	6
Potassium	ppm	ASTM D5185m >20	5	2	13

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.5	1
Nitration	Abs/cm	*ASTM D7624 >20	8.6	8.6	13.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.9	22.2	33.6



OIL ANALYSIS REPORT

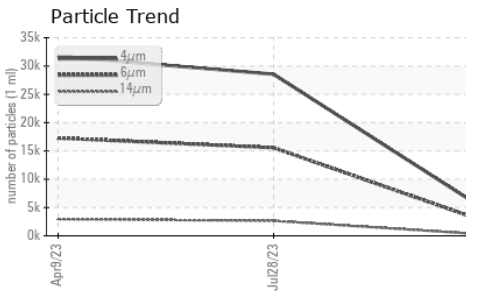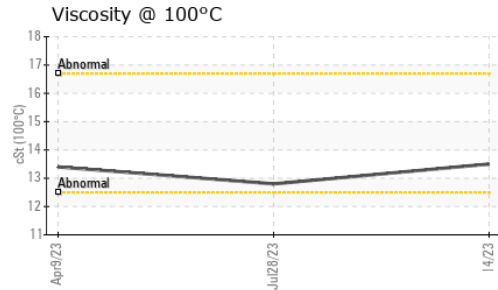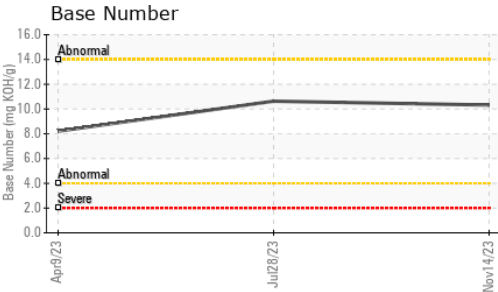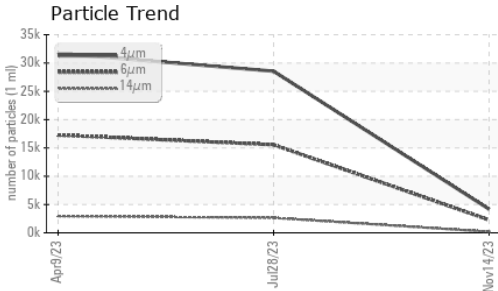

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		4176	28552	31710
Particles >6µm	ASTM D7647	>5000	2275	▲ 15554	▲ 17274
Particles >14µm	ASTM D7647	>640	187	▲ 2647	▲ 2940
Particles >21µm	ASTM D7647	>160	130	▲ 892	▲ 990
Particles >38µm	ASTM D7647	>40	20	▲ 138	▲ 153
Particles >71µm	ASTM D7647	>10	2	▲ 14	▲ 16
Oil Cleanliness	ISO 4406 (c)	>19/16	18/15	▲ 21/19	▲ 21/19


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.4	21.0	33.8
Base Number (BN)	mg KOH/g	ASTM D2896		10.32	10.63	8.21

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.5	12.8	13.4

GRAPHS


Ferrous Alloys

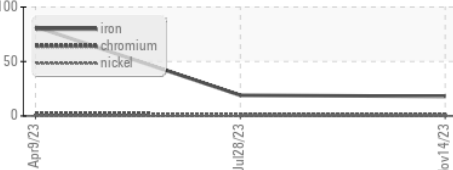


Non-ferrous Metals

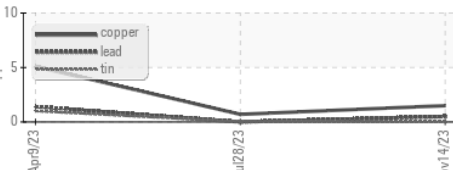


Viscosity @ 100°C

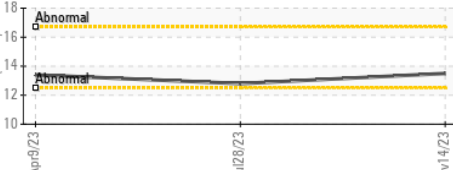

Particle Count

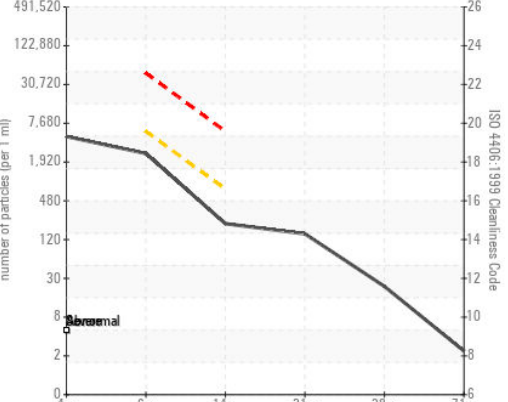

Base Number

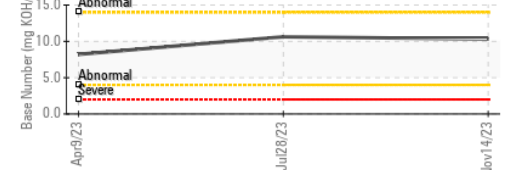

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012028 Received : 20 Nov 2023
 Lab Number : 06013443 Diagnosed : 23 Nov 2023
 Unique Number : 10752587 Diagnostician : Don Baldrige
 Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F: