




# OIL ANALYSIS REPORT

Sample Rating Trend

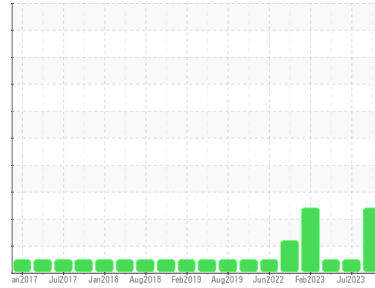

GLYCOL



Machine Id  
**AUTOCAR 27245**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. There is a moderate amount of particulates present in the oil. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012075</b>	KL0012052	KLM2339289
Sample Date	Client Info		<b>10 Nov 2023</b>	25 Jul 2023	10 Apr 2023
Machine Age	mls	Client Info	<b>99285</b>	95111	91980
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>17</b>	4	19
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	<1	1
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	0	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>29</b>	100	37
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	69	56
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>857</b>	857	979
Calcium	ppm	ASTM D5185m	3000	<b>1264</b>	1356	1102
Phosphorus	ppm	ASTM D5185m	1150	<b>1085</b>	1097	1050
Zinc	ppm	ASTM D5185m	1350	<b>1319</b>	1315	1301
Sulfur	ppm	ASTM D5185m	4250	<b>3555</b>	4384	4109

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	3	6
Sodium	ppm	ASTM D5185m	>158	<b>30</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>▲ 47</b>	0	2
Glycol	%	*ASTM D2982		<b>0.0</b>	NEG	NEG


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.5</b>	6.4	9.1
Sulfation	Abs.1mm	*ASTM D7415	>30	<b>24.2</b>	18.2	23.2




# OIL ANALYSIS REPORT


## Particle Trend

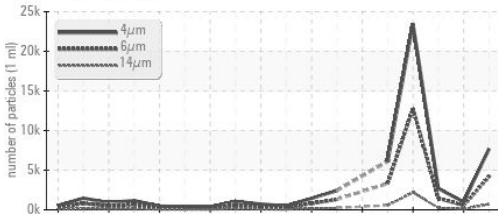


## Glycol Contamination

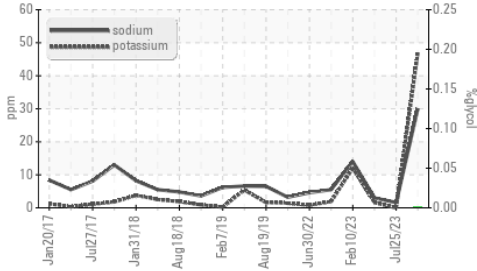


## Glycol Contamination

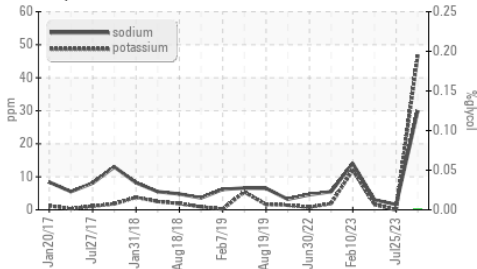

## Base Number

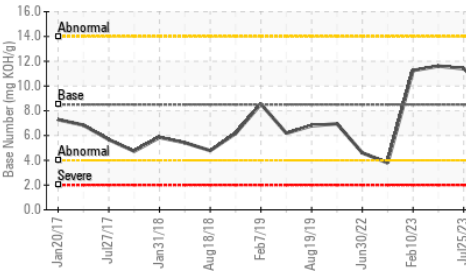

## Viscosity @ 100°C

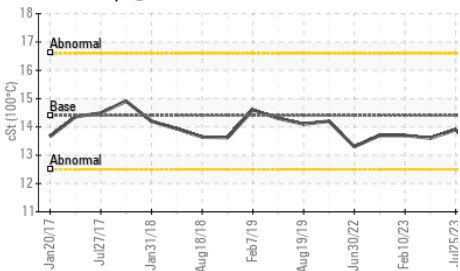

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>7699</b>	992	2680
Particles >6µm	ASTM D7647	>5000	<b>4194</b>	540	1460
Particles >14µm	ASTM D7647	>640	<b>714</b>	92	248
Particles >21µm	ASTM D7647	>160	<b>240</b>	31	84
Particles >38µm	ASTM D7647	>40	<b>37</b>	5	13
Particles >71µm	ASTM D7647	>10	<b>4</b>	0	1
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>19/17</b>	16/14	18/15


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	<b>24.0</b>	14.5	20.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.62</b>	11.40	11.61

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.0</b>	13.9	13.6

## GRAPHS


### Ferrous Alloys

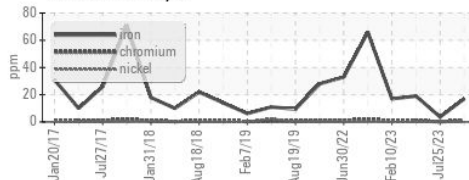


### Non-ferrous Metals

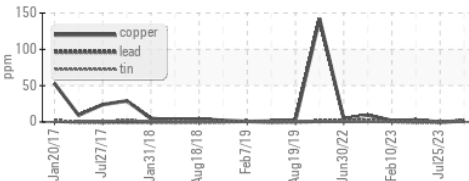


### Viscosity @ 100°C

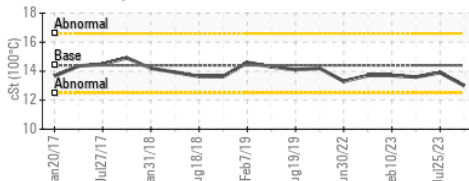

### Particle Count

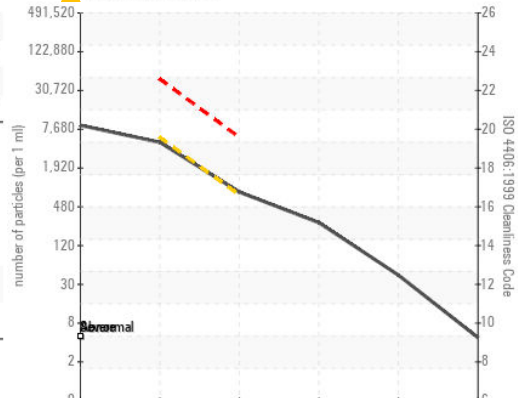

### Base Number

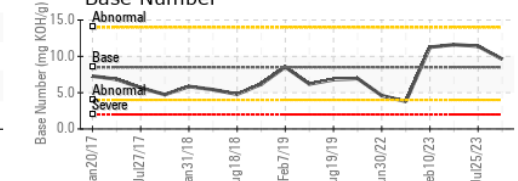

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0012075 **Received** : 20 Nov 2023  
**Lab Number** : 06013448 **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10752592 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: Glycol, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F: