




# OIL ANALYSIS REPORT

Sample Rating Trend

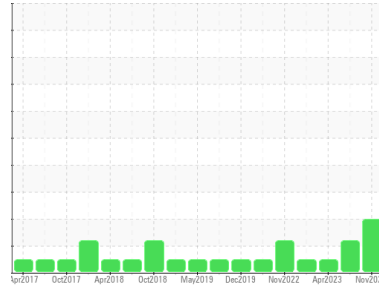

ISO



Machine Id  
**AUTOCAR 27242**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012074</b>	KL0012051	KLM2340554
Sample Date	Client Info		<b>10 Nov 2023</b>	25 Jul 2023	10 Apr 2023
Machine Age	mls	Client Info	<b>121076</b>	117798	113658
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>10</b>	23	8
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	0
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>42</b>	26	60
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>63</b>	68	64
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>1152</b>	1118	1115
Calcium	ppm	ASTM D5185m	3000	<b>1032</b>	1031	982
Phosphorus	ppm	ASTM D5185m	1150	<b>1150</b>	1067	1085
Zinc	ppm	ASTM D5185m	1350	<b>1401</b>	1338	1342
Sulfur	ppm	ASTM D5185m	4250	<b>3636</b>	4016	4199

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	8	7
Sodium	ppm	ASTM D5185m	>158	<b>3</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	1


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.5</b>	0.7	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	11.7	8.6
Sulfation	Abs./1mm	*ASTM D7415	>30	<b>22.9</b>	25.6	21.5




# OIL ANALYSIS REPORT


▲ Particle Trend

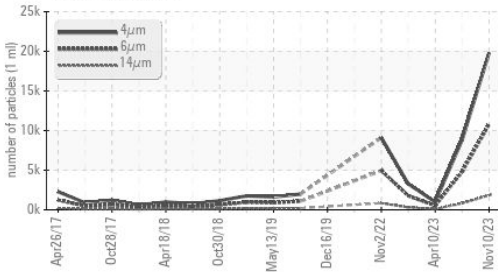


▲ Particle Trend

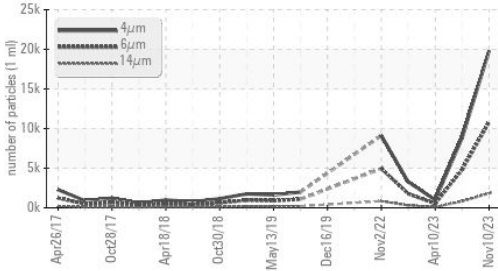

Base Number

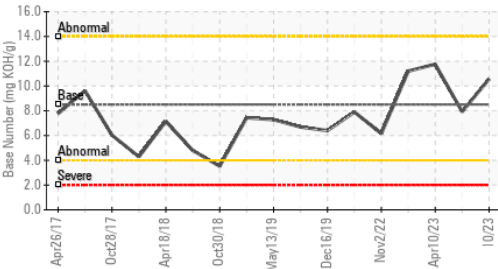

Viscosity @ 100°C

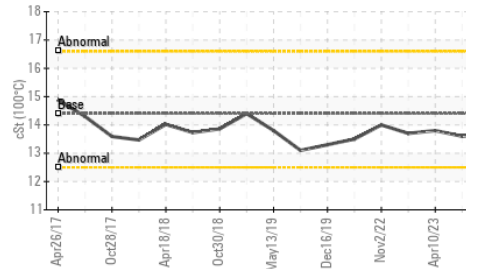

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>19809</b>	8822	983
Particles >6µm	ASTM D7647	>5000	▲ <b>10791</b>	4806	536
Particles >14µm	ASTM D7647	>640	▲ <b>1837</b>	▲ 818	91
Particles >21µm	ASTM D7647	>160	▲ <b>619</b>	▲ 275	31
Particles >38µm	ASTM D7647	>40	▲ <b>96</b>	43	5
Particles >71µm	ASTM D7647	>10	▲ <b>10</b>	4	0
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ <b>21/18</b>	▲ 19/17	16/14


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>21.7</b>	26.1	18.8
Base Number (BN)	mg KOH/g ASTM D2896	8.5	<b>10.57</b>	7.92	11.76

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	<b>13.7</b>	13.6	13.8

GRAPHS


Ferrous Alloys

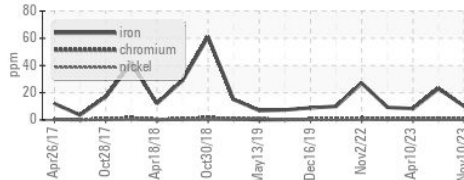


Non-ferrous Metals

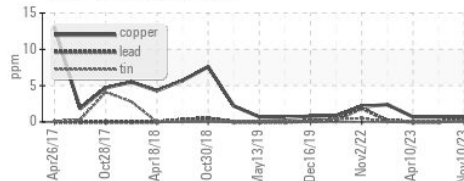


Viscosity @ 100°C

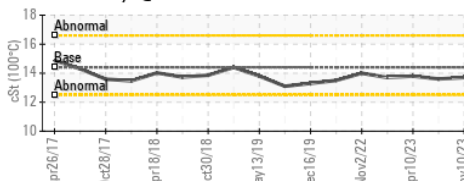

▲ Particle Count

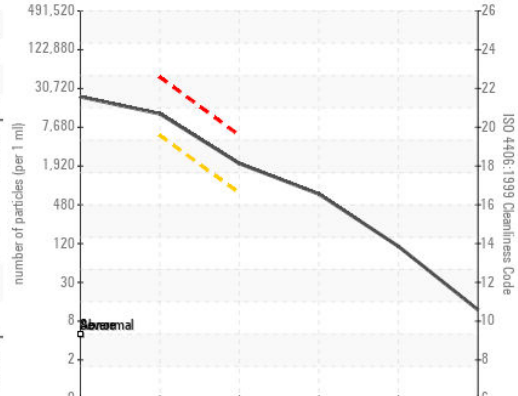

Base Number

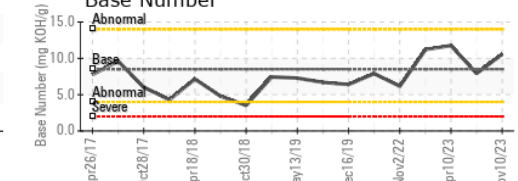

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012074 Received : 20 Nov 2023  
 Lab Number : 06013449 Diagnosed : 23 Nov 2023  
 Unique Number : 10752593 Diagnostician : Don Baldrige  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)