




# OIL ANALYSIS REPORT

Sample Rating Trend

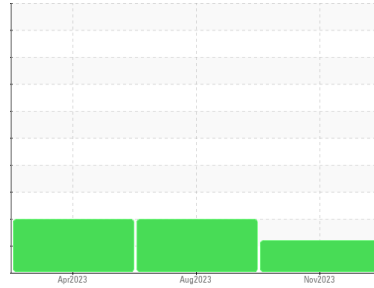

ISO



Machine Id  
**27300**  
 Component  
**Diesel Engine**  
 Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012122</b>	KL0012000	KLM2339359
Sample Date	Client Info		<b>11 Nov 2023</b>	02 Aug 2023	11 Apr 2023
Machine Age	mls	Client Info	<b>56126</b>	54632	50452
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>42</b>	32	94
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	3
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>18</b>	13	15
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	1	6
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>27</b>	52	20
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>61</b>	69	58
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	<b>1095</b>	1168	1058
Calcium	ppm	ASTM D5185m	<b>992</b>	1095	1199
Phosphorus	ppm	ASTM D5185m	<b>1055</b>	1123	1042
Zinc	ppm	ASTM D5185m	<b>1321</b>	1395	1341
Sulfur	ppm	ASTM D5185m	<b>3456</b>	4277	3816

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	6	12
Sodium	ppm	ASTM D5185m	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>48</b>	40	41


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	0.7	1.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.7</b>	9.2	14.4
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>25.8</b>	23.1	33.6




# OIL ANALYSIS REPORT


## Particle Trend

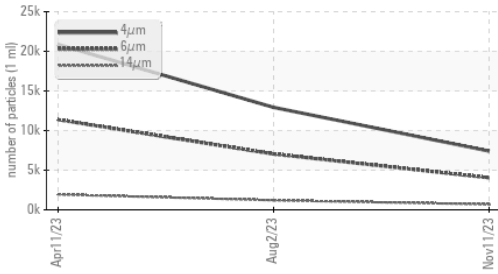


## Particle Trend

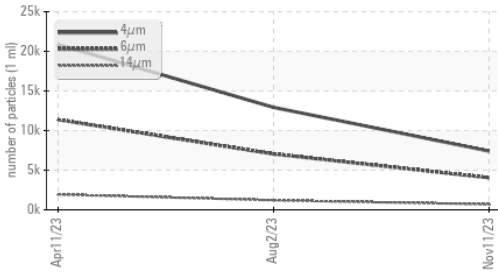

## Base Number

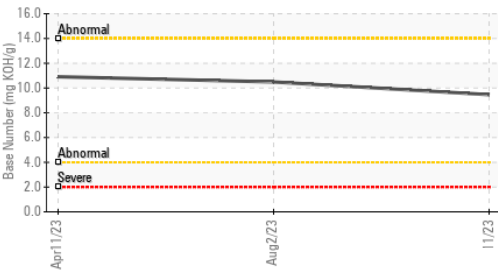

## Viscosity @ 100°C

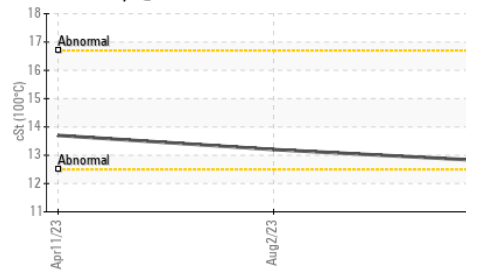

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>7412</b>	12928	20871
Particles >6µm	ASTM D7647	>5000	<b>4038</b>	▲ 7042	▲ 11370
Particles >14µm	ASTM D7647	>640	▲ <b>687</b>	▲ 1199	▲ 1935
Particles >21µm	ASTM D7647	>160	▲ <b>231</b>	▲ 404	▲ 652
Particles >38µm	ASTM D7647	>40	<b>36</b>	▲ 62	▲ 101
Particles >71µm	ASTM D7647	>10	<b>4</b>	6	10
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ <b>19/17</b>	▲ 20/17	▲ 21/18


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>27.1</b>	22.7	35.7
Base Number (BN)	mg KOH/g ASTM D2896		<b>9.46</b>	10.49	10.91

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		<b>12.8</b>	13.2	13.7

## GRAPHS


### Ferrous Alloys

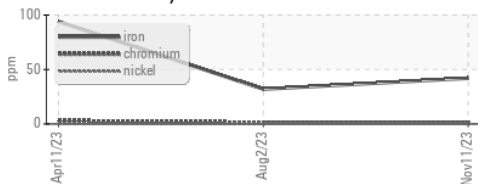


### Non-ferrous Metals

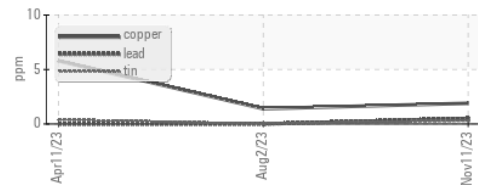


### Viscosity @ 100°C

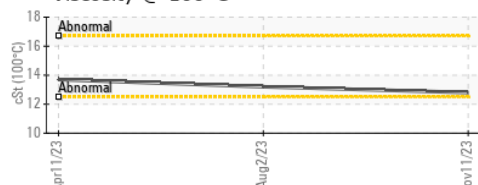

### Particle Count

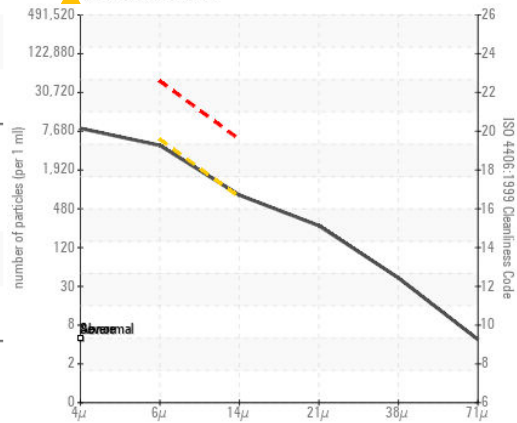

### Base Number

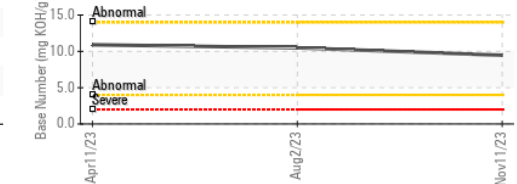

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012122 Received : 20 Nov 2023  
 Lab Number : 06013451 Diagnosed : 23 Nov 2023  
 Unique Number : 10752595 Diagnostician : Don Baldrige  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F: