




OIL ANALYSIS REPORT

Sample Rating Trend

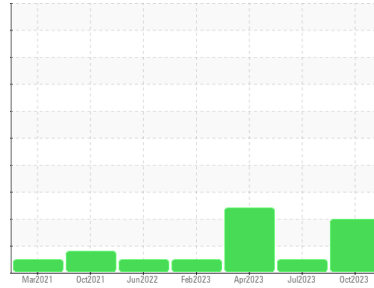

ISO



Machine Id
27271
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	KL0012113	KL0011941	KLM2339382	
Sample Date	Client Info	31 Oct 2023	27 Jul 2023	08 Apr 2023	
Machine Age	mls	Client Info	64388	61576	59374
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		ABNORMAL	NORMAL	SEVERE	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	0.7	9.4
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	10	3	20
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >3	0	<1	0
Aluminum	ppm ASTM D5185m >20	2	<1	2
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	<1	0	<1
Tin	ppm ASTM D5185m >15	0	0	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	65	137	36
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	61	64	53
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	1141	1118	920
Calcium	ppm ASTM D5185m	972	977	973
Phosphorus	ppm ASTM D5185m	1133	1092	931
Zinc	ppm ASTM D5185m	1358	1307	1150
Sulfur	ppm ASTM D5185m	3612	4235	3705

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	4	5
Sodium	ppm ASTM D5185m	2	2	2
Potassium	ppm ASTM D5185m >20	3	<1	3


INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.7	0.2	0.8
Nitration	Abs/cm *ASTM D7624 >20	8.7	5.4	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	22.8	18.6	27.2




OIL ANALYSIS REPORT


▲ Particle Trend

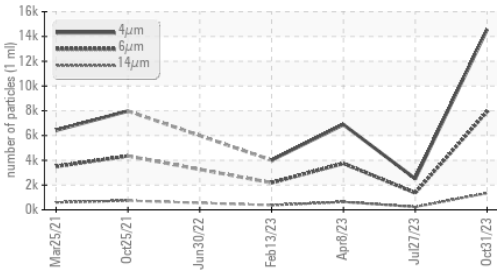


▲ Particle Trend

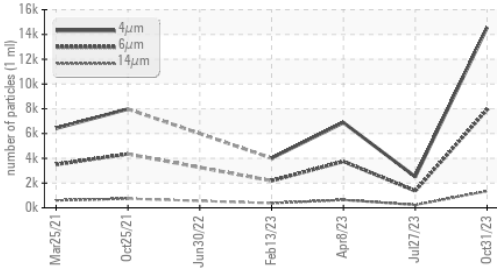

Base Number

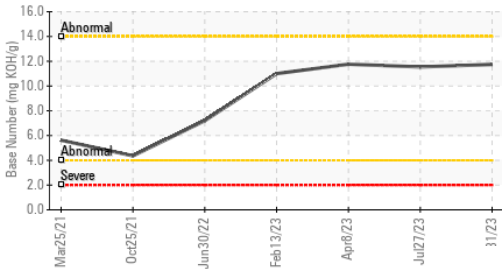

Viscosity @ 100°C

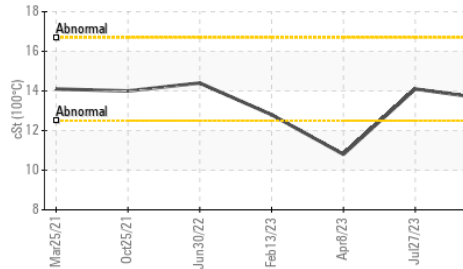

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		14563	2514	6881
Particles >6µm	ASTM D7647	>5000	▲ 7933	1370	3749
Particles >14µm	ASTM D7647	>640	▲ 1350	233	638
Particles >21µm	ASTM D7647	>160	▲ 455	79	215
Particles >38µm	ASTM D7647	>40	▲ 70	12	33
Particles >71µm	ASTM D7647	>10	▲ 7	1	3
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 20/18	18/15	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	21.3	14.9	31.4
Base Number (BN)	mg KOH/g ASTM D2896		11.74	11.54	11.76

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		13.6	14.1	▲ 10.8

GRAPHS


Ferrous Alloys

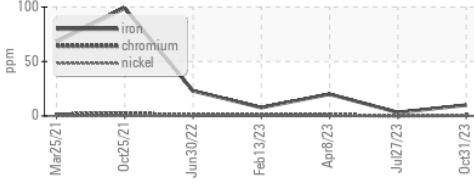


Non-ferrous Metals

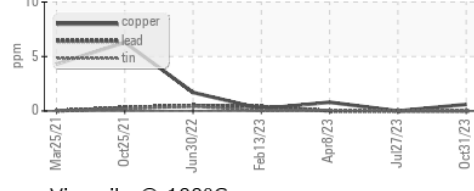


Viscosity @ 100°C

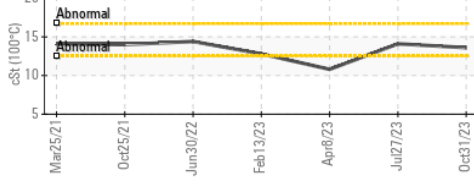

▲ Particle Count

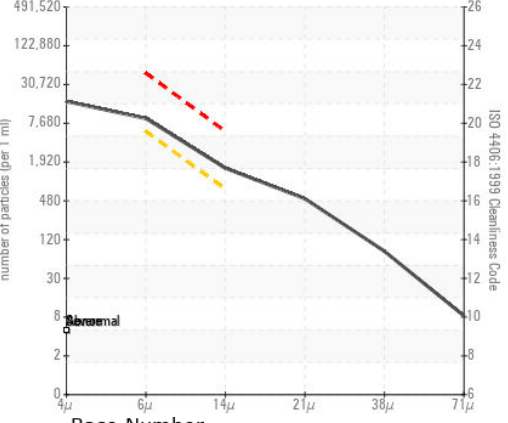

Base Number

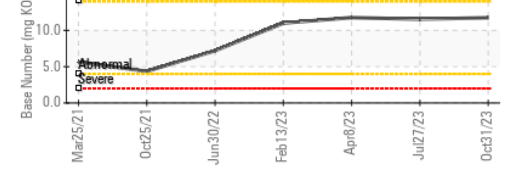

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012113 Received : 20 Nov 2023
 Lab Number : 06013459 Diagnosed : 23 Nov 2023
 Unique Number : 10752603 Diagnostician : Don Baldrige
 Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)