




OIL ANALYSIS REPORT

Sample Rating Trend

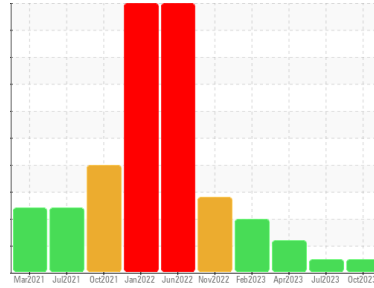

NORMAL



Machine Id
27266
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012111	KL0011939	KLM2339412
Sample Date	Client Info		31 Oct 2023	27 Jul 2023	09 Apr 2023
Machine Age	mls	Client Info	70881	0	70544
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	0.6	▲ 7.3
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	6	33
Chromium	ppm	ASTM D5185m >20	<1	<1	1
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	<1	1
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	7	7	72
Tin	ppm	ASTM D5185m >15	0	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	115	134	46
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	53	55	56
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1069	1062	1012
Calcium	ppm	ASTM D5185m	1011	1090	886
Phosphorus	ppm	ASTM D5185m	1078	1046	958
Zinc	ppm	ASTM D5185m	1282	1261	1215
Sulfur	ppm	ASTM D5185m	3621	4238	3785

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	6	9
Sodium	ppm	ASTM D5185m	5	4	26
Potassium	ppm	ASTM D5185m >20	4	2	11


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	6.3	5.9	13.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.9	18.9	28.9




OIL ANALYSIS REPORT


Particle Trend

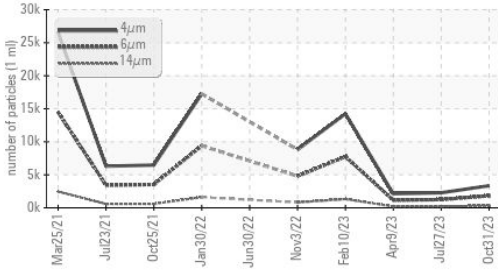


Base Number

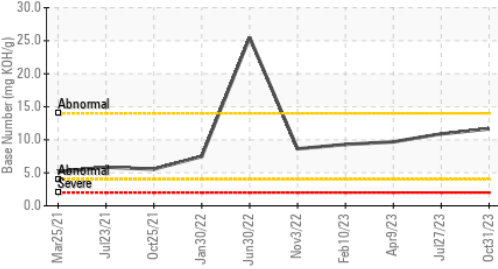

Viscosity @ 100°C

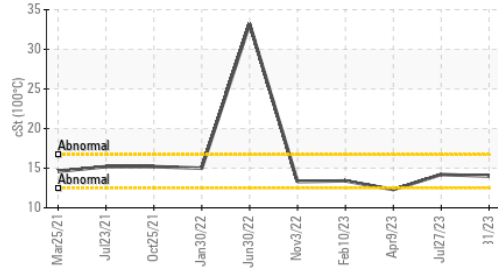

Particle Trend

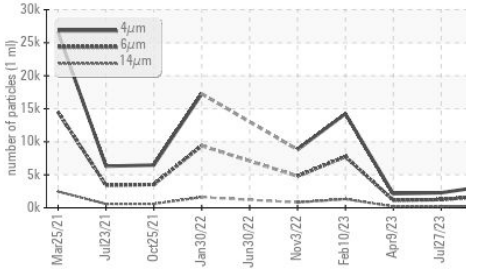

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		3341	2279	2123
Particles >6µm	ASTM D7647	>5000	1820	1242	1156
Particles >14µm	ASTM D7647	>640	310	211	197
Particles >21µm	ASTM D7647	>160	104	71	66
Particles >38µm	ASTM D7647	>40	16	11	10
Particles >71µm	ASTM D7647	>10	2	1	1
Oil Cleanliness	ISO 4406 (c)	>19/16	18/15	17/15	17/15


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	15.4	35.0
Base Number (BN)	mg KOH/g	ASTM D2896		11.66	10.89	9.69

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.0	14.2	▲ 12.3

GRAPHS


Ferrous Alloys

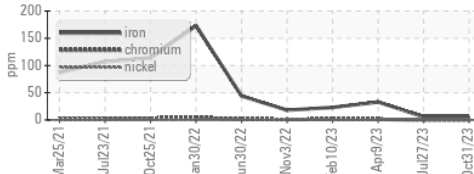


Non-ferrous Metals

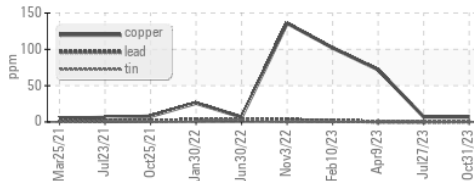


Viscosity @ 100°C

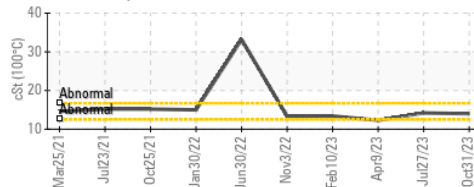

Particle Count

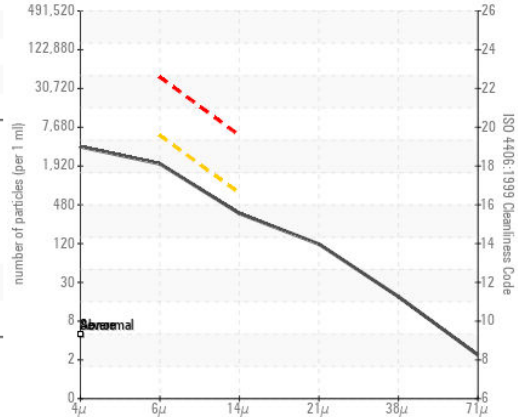

Base Number

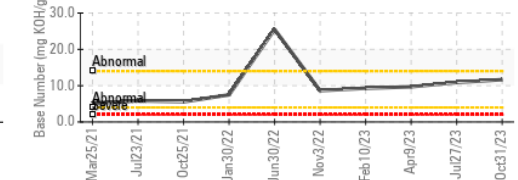

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012111
 Lab Number : 06013464
 Unique Number : 10752608
 Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)