OIL ANALYSIS REPORT

Sample Rating Trend

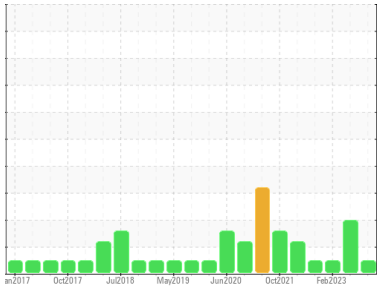

NORMAL

Machine Id
AUTOCAR 27239
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**KL0012109**	KLM2339399	KLM2339305
Sample Date		Client Info		**31 Oct 2023**	10 Apr 2023	10 Feb 2023
Machine Age	mls	Client Info		**70459**	68670	68258
Oil Age	mls	Client Info		**0**	0	15897
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>5	**<1.0**	<1.0	<1.0
Water		WC Method	>0.2	**NEG**	NEG	NEG
Glycol		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	**8**	5	4
Chromium	ppm	ASTM D5185m	>20	**<1**	<1	<1
Nickel	ppm	ASTM D5185m	>4	**0**	0	0
Titanium	ppm	ASTM D5185m		**<1**	<1	<1
Silver	ppm	ASTM D5185m	>3	**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**2**	0	<1
Lead	ppm	ASTM D5185m	>40	**<1**	0	<1
Copper	ppm	ASTM D5185m	>330	**1**	<1	0
Tin	ppm	ASTM D5185m	>15	**0**	0	0
Vanadium	ppm	ASTM D5185m		**<1**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	**60**	102	126
Barium	ppm	ASTM D5185m	10	**0**	0	0
Molybdenum	ppm	ASTM D5185m	100	**61**	58	60
Manganese	ppm	ASTM D5185m		**<1**	<1	1
Magnesium	ppm	ASTM D5185m	450	**1137**	1103	1135
Calcium	ppm	ASTM D5185m	3000	**979**	1007	1061
Phosphorus	ppm	ASTM D5185m	1150	**1149**	1075	1042
Zinc	ppm	ASTM D5185m	1350	**1380**	1343	1355
Sulfur	ppm	ASTM D5185m	4250	**3738**	4279	4022

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**4**	4	6
Sodium	ppm	ASTM D5185m	>158	**3**	2	1
Potassium	ppm	ASTM D5185m	>20	**3**	1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	**0.2**	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	**9.0**	7.2	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	**21.6**	20.1	19.4

OIL ANALYSIS REPORT

Particle Trend

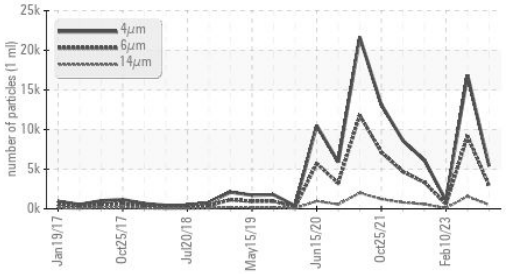

Base Number

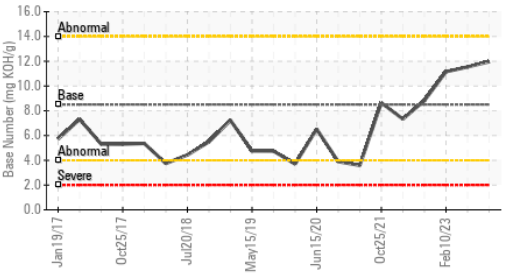

Viscosity @ 100°C

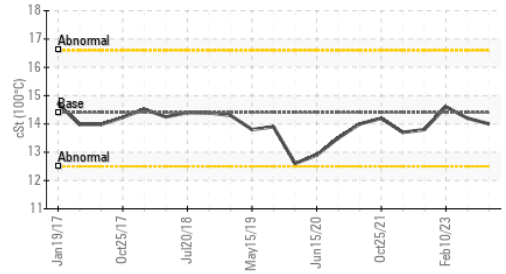

Particle Trend

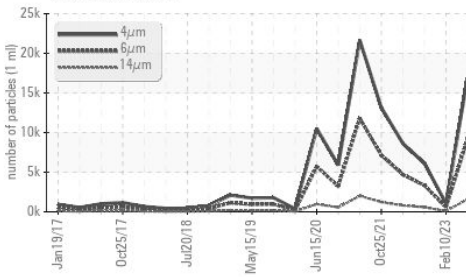

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**5403**	16869	1070
Particles >6µm		ASTM D7647	>5000	**2943**	▲ 9189	583
Particles >14µm		ASTM D7647	>640	**501**	▲ 1564	99
Particles >21µm		ASTM D7647	>160	**169**	▲ 527	33
Particles >38µm		ASTM D7647	>40	**26**	▲ 81	5
Particles >71µm		ASTM D7647	>10	**3**	8	1
Oil Cleanliness		ISO 4406 (c)	>19/16	**19/16**	▲ 20/18	16/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	**19.6**	16.2	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	**11.96**	11.54	11.15

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	**14.0**	14.2	14.6

GRAPHS

Ferrous Alloys

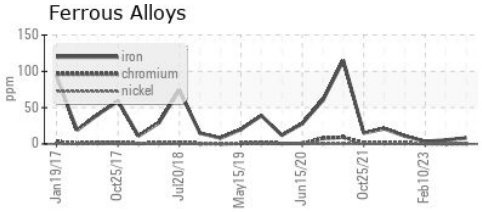

Non-ferrous Metals

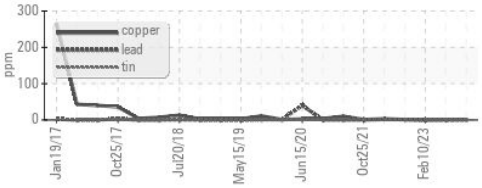

Viscosity @ 100°C

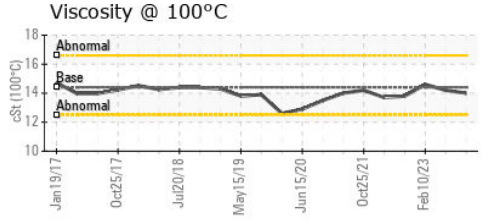

Particle Count

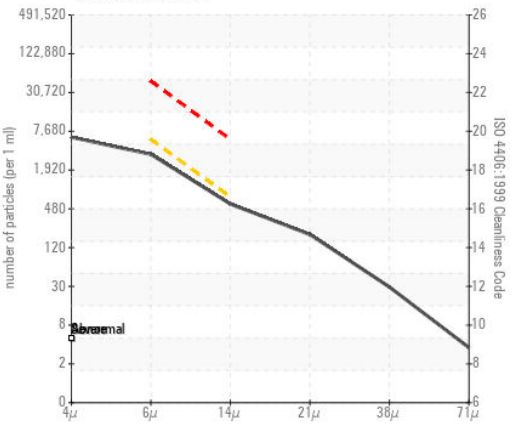

Base Number

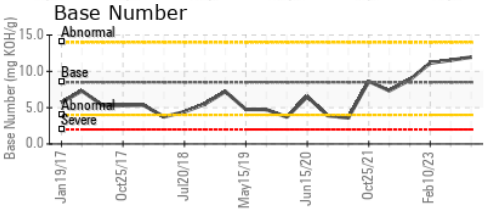

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012109 **Received** : 20 Nov 2023
Lab Number : 06013466 **Diagnosed** : 23 Nov 2023
Unique Number : 10752610 **Diagnostician** : Don Baldridge
Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY & COUNTY HONOLULU
99-999 IWAENA RD
AIEA, HI
US 96701
Contact: CLYDE OMIJA
comija@honolulu.gov
T: (575)623-9952
F: