




# OIL ANALYSIS REPORT

Sample Rating Trend

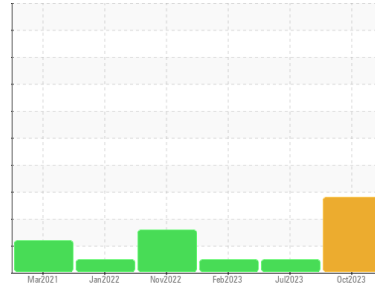

**DEGRADATION**



Machine Id  
**35154**  
 Component  
**Diesel Engine**  
 Fluid  
**NOT GIVEN (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of particulates present in the oil.

### ▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012087</b>	KL0012062	KLM2339343
Sample Date	Client Info		<b>31 Oct 2023</b>	27 Jul 2023	14 Feb 2023
Machine Age	mls	Client Info	<b>195080</b>	185128	181775
Oil Age	mls	Client Info	<b>0</b>	0	28179
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>65	<b>16</b>	13	6
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>35	<b>6</b>	4	2
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>180	<b>17</b>	19	4
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>36</b>	91	112
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>54</b>	59	55
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>1014</b>	1049	1038
Calcium	ppm	ASTM D5185m		<b>1236</b>	1351	1413
Phosphorus	ppm	ASTM D5185m		<b>1096</b>	1169	1114
Zinc	ppm	ASTM D5185m		<b>1366</b>	1427	1467
Sulfur	ppm	ASTM D5185m		<b>3306</b>	4579	4434

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>7</b>	5	6
Sodium	ppm	ASTM D5185m		<b>6</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	4	3


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	6.9	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	19.3	19.0




# OIL ANALYSIS REPORT


▲ Particle Trend

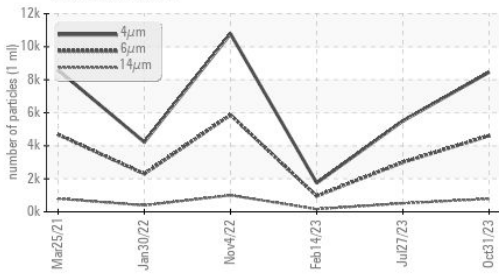


▲ Particle Count

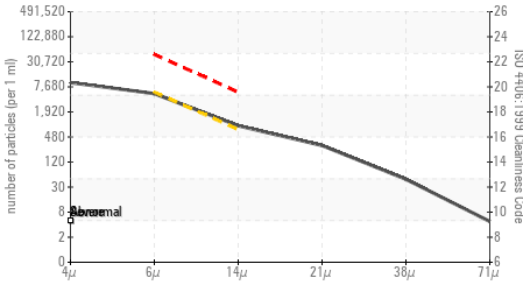

▲ Particle Trend

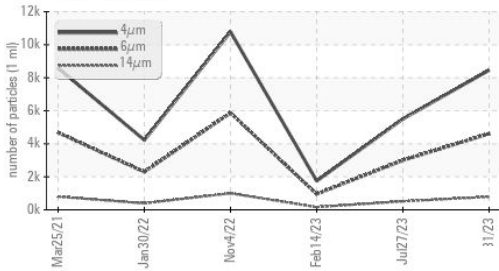

Viscosity @ 100°C

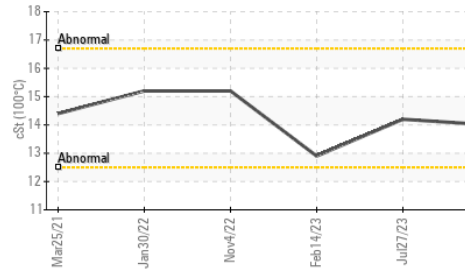

## FLUID CLEANLINESS

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>8456</b>	5507	1749
Particles >6µm	ASTM D7647	>5000	<b>4607</b>	3000	953
Particles >14µm	ASTM D7647	>640	<b>▲ 784</b>	511	162
Particles >21µm	ASTM D7647	>160	<b>▲ 264</b>	172	55
Particles >38µm	ASTM D7647	>40	<b>▲ 41</b>	27	8
Particles >71µm	ASTM D7647	>10	<b>4</b>	3	1
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>▲ 19/17</b>	19/16	17/15

## FLUID DEGRADATION

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	<b>17.4</b>	14.6	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>▲ 3.51</b>	11.46	10.73	

## VISUAL


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.0</b>	14.2	12.9

## GRAPHS


Ferrous Alloys

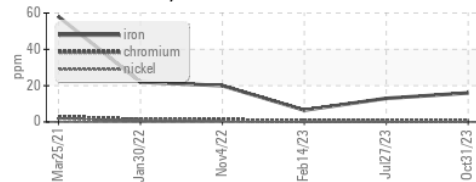


Non-ferrous Metals

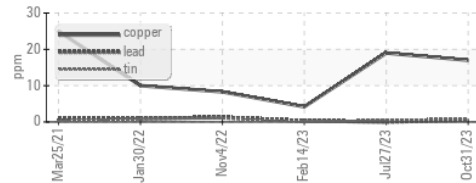


Viscosity @ 100°C

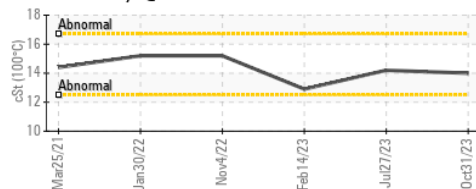

▲ Particle Count

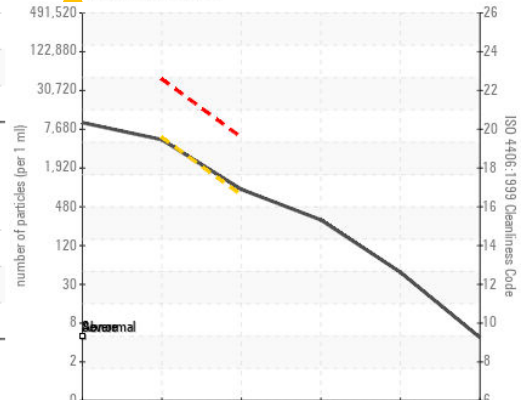

▲ Base Number

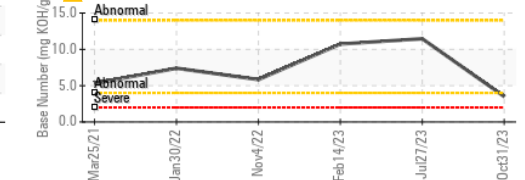

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012087 Received : 20 Nov 2023  
 Lab Number : 06013474 Diagnosed : 23 Nov 2023  
 Unique Number : 10752618 Diagnostician : Don Baldrige  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITY & COUNTY HONOLULU

99-999 IWAENA RD  
 AIEA, HI  
 US 96701

Contact: CLYDE OMIJA  
 comija@honolulu.gov

T: (575)623-9952

F: