

OIL ANALYSIS REPORT

Sample Rating Trend FUEL

DIAGNOSIS

Machine Id Westchester def hutch 6ej01191 Component **Diesel Engine**

Fluid DIESEL ENGINE OIL SAE 15W40 (--- GAL)

	0AE 131140 (0/	,	-	Oct2022	Nov2023		
DIAGNOSIS	SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
A Recommendation We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.	Sample Number		Client Info		WC0878316	WC0748986	
	Sample Date		Client Info		20 Nov 2023	31 Oct 2022	
	Machine Age	hrs	Client Info		0	666	
	Oil Age	hrs	Client Info		0	10	
	Oil Changed		Client Info		N/A	Changed	
ear	Sample Status				ABNORMAL	NORMAL	
component wear rates are normal.				11 1. 11			
Contamination There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.	CONTAMINATION		method	limit/base		history1	history2
	Water			>0.2	NEG	NEG	
	Glycol		WC Method		NEG	NEG	
Fluid Condition The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.	WEAR METALS		method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m	>100	<1	<1	
	Chromium	ppm	ASTM D5185m		0	0	
	Nickel	ppm	ASTM D5185m		<1	0	
	Titanium	ppm	ASTM D5185m		<1	2	
	Silver	ppm	ASTM D5185m		0	<1	
	Aluminum	ppm	ASTM D5185m		1	<1	
	Lead		ASTM D5185m	>40	، <1	<1	
		ppm			<1		
	Copper	ppm	ASTM D5185m ASTM D5185m			<1	
	Tin	ppm		>15	<1	<1	
	Vanadium	ppm	ASTM D5185m		0	0	
	Cadmium	ppm	ASTM D5185m		0	0	
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m	250	12	35	
	Barium	ppm	ASTM D5185m	10	0	0	
	Molybdenum	ppm	ASTM D5185m	100	54	53	
	Manganese	ppm	ASTM D5185m		<1	<1	
	Magnesium	ppm	ASTM D5185m	450	896	758	
	Calcium	ppm	ASTM D5185m	3000	993	1230	
	Phosphorus	ppm	ASTM D5185m	1150	919	934	
	Zinc	ppm		1350	1154	1119	
	Sulfur	ppm	ASTM D5185m	4250	2930	3616	
	CONTAMINANTS		method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m		3	3	
	Sodium	ppm	ASTM D5185m		0	2	
	Potassium	ppm	ASTM D5185m		2	0	
		%	ASTM D3524		<u> </u>	<1.0	
	INFRA-RED		method	limit/base		history1	history2
		0/					
	Soot %	%	*ASTM D7844		0	0.1	
	Nitration	Abs/cm	*ASTM D7624		5.0	6.1	
	Sulfation	Abs/.1mm	*ASTM D7415	>30	17.1	19.3	
	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	Oxidation	Abs/.1mm	*ASTM D7414	>25	12.8	14.5	


Base Number (BN) mg KOH/g ASTM D2896 8.5

10.6

9.7



OIL ANALYSIS REPORT

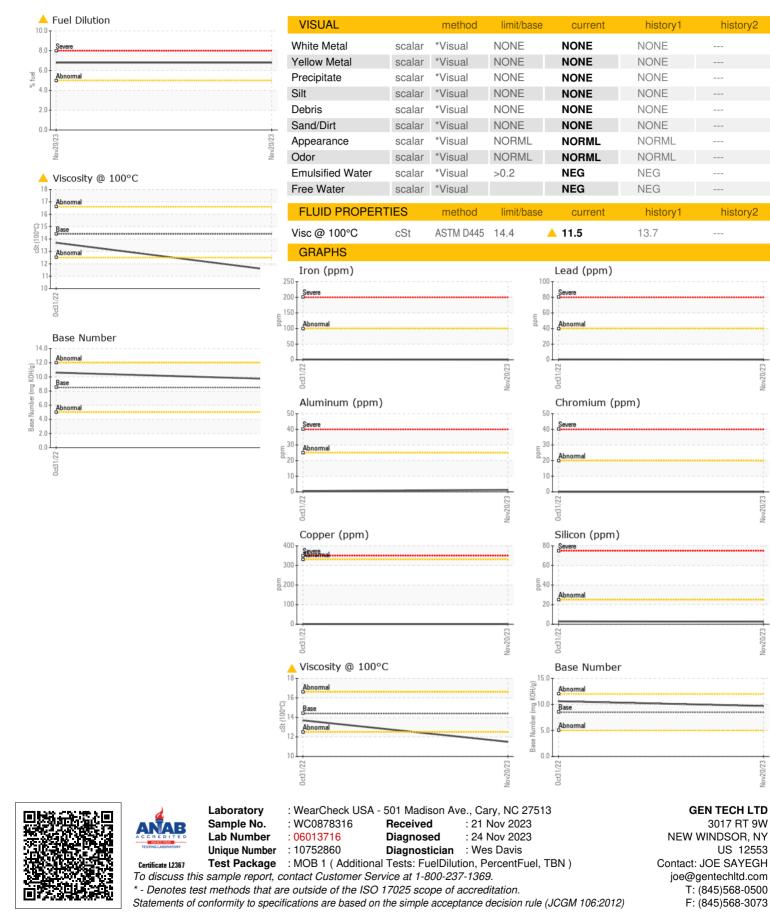

Contact/Location: JOE SAYEGH - GENNEW