OIL ANALYSIS REPORT

Sample Rating Trend

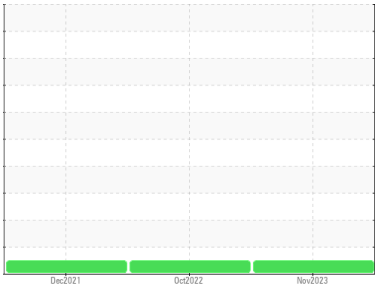

NORMAL

Machine Id
Westchester def bradhurst water tower 3005498294
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
Metal levels are typical for a new component breaking in.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0834510**	WC0699398	WC0612446
Sample Date		Client Info		**13 Nov 2023**	20 Oct 2022	06 Dec 2021
Machine Age	hrs	Client Info		**168**	0	130
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	Changed	Changed
Sample Status				**NORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>5	**<1.0**	<1.0	<1.0
Water		WC Method	>0.2	**NEG**	NEG	NEG
Glycol		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	**0**	1	3
Chromium	ppm	ASTM D5185m	>20	**0**	<1	<1
Nickel	ppm	ASTM D5185m	>4	**<1**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m	>3	**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**2**	<1	2
Lead	ppm	ASTM D5185m	>40	**0**	0	<1
Copper	ppm	ASTM D5185m	>330	**0**	<1	2
Tin	ppm	ASTM D5185m	>15	**<1**	0	0
Antimony	ppm	ASTM D5185m		**---**	---	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	**15**	30	6
Barium	ppm	ASTM D5185m	10	**0**	0	0
Molybdenum	ppm	ASTM D5185m	100	**59**	61	60
Manganese	ppm	ASTM D5185m		**<1**	<1	<1
Magnesium	ppm	ASTM D5185m	450	**914**	761	911
Calcium	ppm	ASTM D5185m	3000	**1107**	1254	1254
Phosphorus	ppm	ASTM D5185m	1150	**977**	989	1104
Zinc	ppm	ASTM D5185m	1350	**1234**	1194	1360
Sulfur	ppm	ASTM D5185m	4250	**3155**	3845	3377

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**4**	4	4
Sodium	ppm	ASTM D5185m	>158	**0**	1	1
Potassium	ppm	ASTM D5185m	>20	**1**	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	**0.1**	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	**4.8**	5.6	5
Sulfation	Abs/.1mm	*ASTM D7415	>30	**17.4**	18.9	19.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	**12.9**	13.8	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	**9.5**	10.5	11

OIL ANALYSIS REPORT

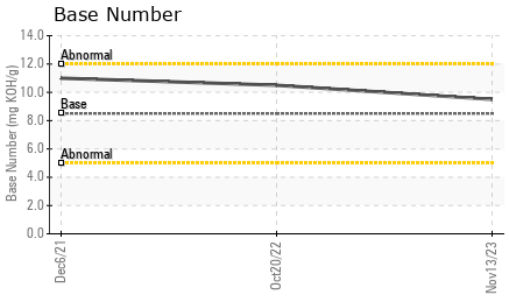

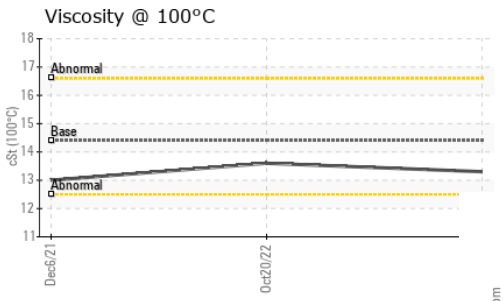

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	**13.3**	13.6	13.0

GRAPHS

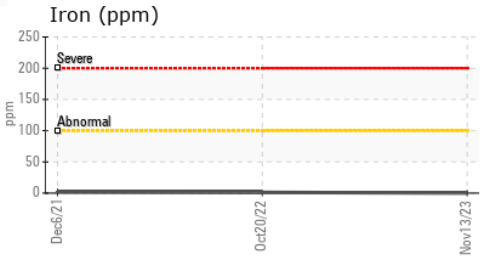

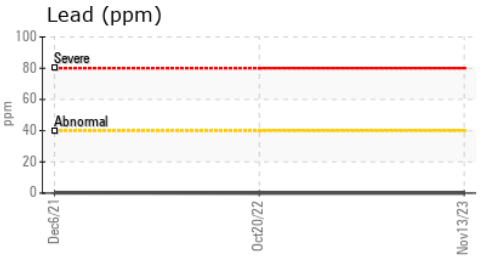

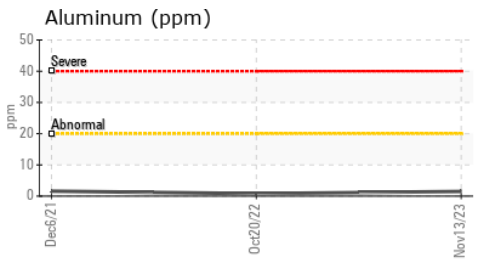

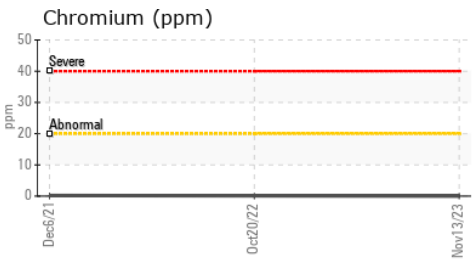

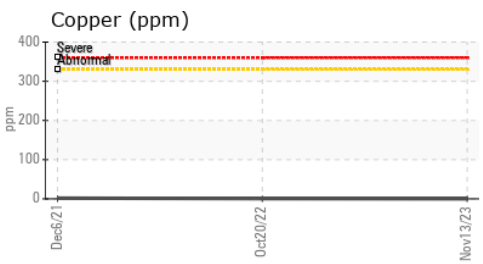

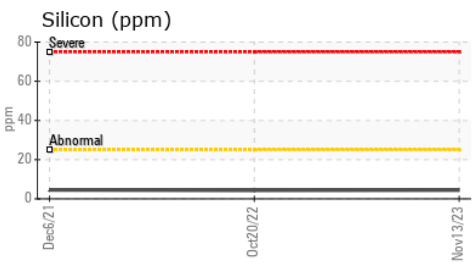

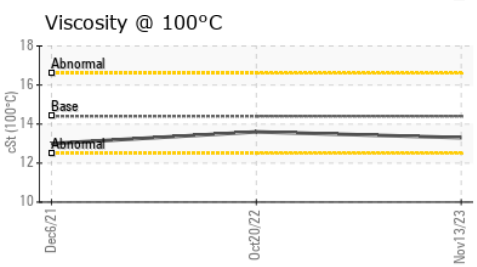

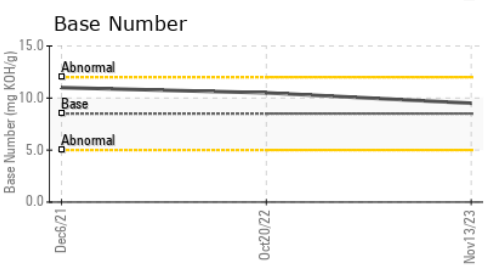

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0834510 **Received** : 21 Nov 2023
Lab Number : 06013718 **Diagnosed** : 22 Nov 2023
Unique Number : 10752862 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GEN TECH LTD
3017 RT 9W
NEW WINDSOR, NY
US 12553
Contact: JOE SAYEGH
joe@gentechltd.com
T: (845)568-0500
F: (845)568-3073