




OIL ANALYSIS REPORT

Sample Rating Trend

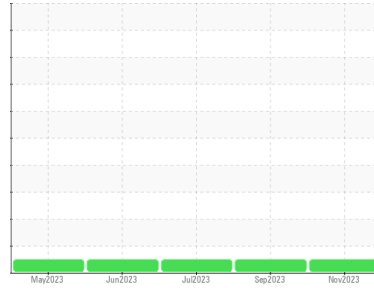

NORMAL



Machine Id
JOHN DEERE 8250R 8250R UNIT 2 (S/N 187152)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal for time on oil.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PE0002527 | PE0002492 | PE0002552 |
| Sample Date | Client Info | | | 15 Nov 2023 | 27 Sep 2023 | 28 Jul 2023 |
| Machine Age | hrs | Client Info | | 3936 | 3575 | 3094 |
| Oil Age | hrs | Client Info | | 3575 | 3190 | 3094 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >2.1 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.21 | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >51 | 57 | 45 | 31 |
| Chromium | ppm | ASTM D5185m | >11 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | 8 | 7 | 6 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >31 | 5 | 3 | 3 |
| Lead | ppm | ASTM D5185m | >26 | 2 | 2 | 0 |
| Copper | ppm | ASTM D5185m | >26 | 22 | 23 | 4 |
| Tin | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |




| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 250 | 14 | 23 | 86 |
| Barium | ppm | ASTM D5185m | 10 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 100 | 175 | 192 | 228 |
| Manganese | ppm | ASTM D5185m | | 1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 450 | 826 | 906 | 929 |
| Calcium | ppm | ASTM D5185m | 3000 | 1274 | 1427 | 1445 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 811 | 836 | 895 |
| Zinc | ppm | ASTM D5185m | 1350 | 1080 | 1144 | 1135 |
| Sulfur | ppm | ASTM D5185m | 4250 | 2783 | 2897 | 3535 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >22 | 10 | 8 | 6 |
| Sodium | ppm | ASTM D5185m | >216 | 17 | 17 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 18 | 12 | <1 |
| Glycol | % | *ASTM D2982 | | NEG | 0.0 | NEG |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.6 | 0.5 | 0.4 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 11.7 | 10.7 | 9.9 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 27.3 | 25.4 | 25.0 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 25.1 | 22.8 | 22.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 5.0 | 6.1 | 7.0 |





OIL ANALYSIS REPORT

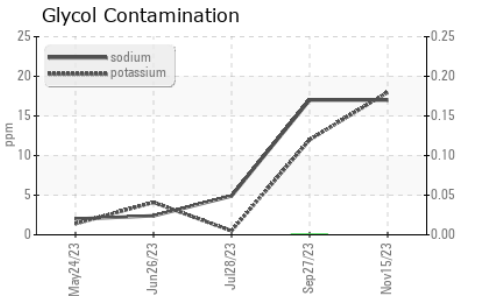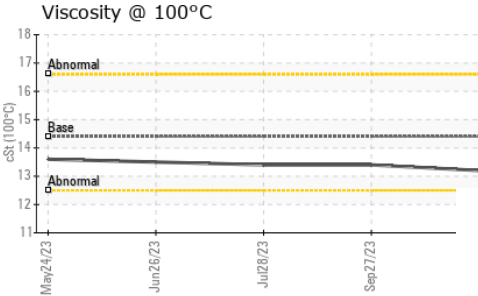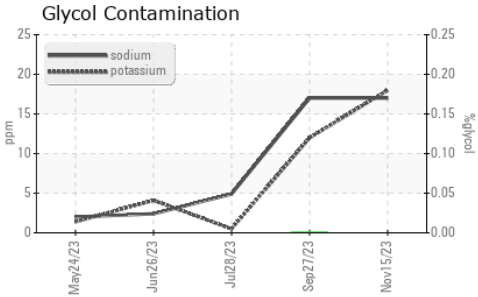

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.2 | 13.4 | 13.4 |

GRAPHS

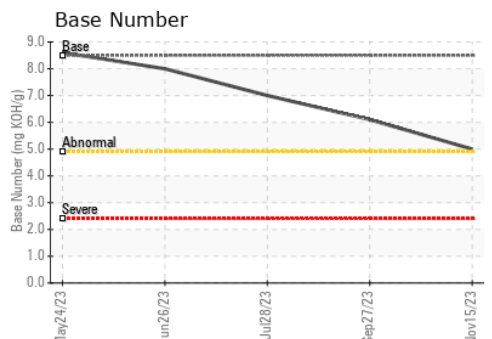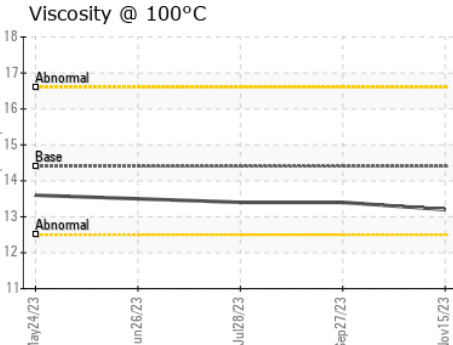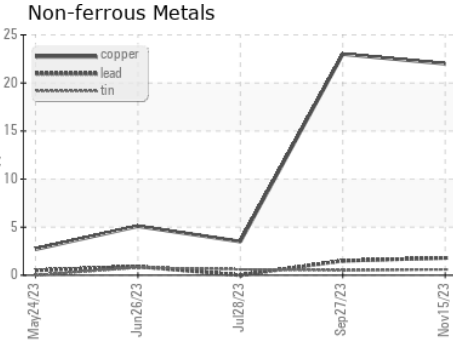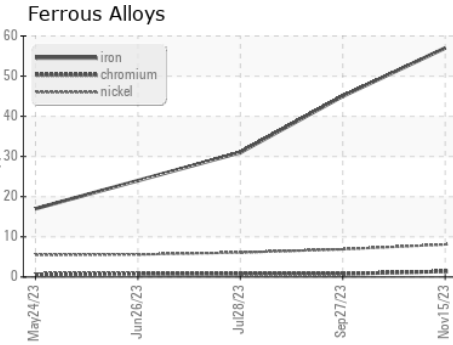

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002527 **Received** : 21 Nov 2023
Lab Number : **06013853** **Diagnosed** : 23 Nov 2023
Unique Number : 10752997 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: FT-IR, Glycol, ICP, KV100, SCREEN, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MORNING STAR DAIRY
 801 FM 694
 DALHART, TX
 US 79022
 Contact: JOHN DEVRIES
 johndevries@gmail.com
 T:
 F: