

OIL ANALYSIS REPORT

Sample Rating Trend



Area Action Newark CATERPILLAR 966H 5583 (S/N A6D02838) Component **Hydraulic System**

NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear


All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0774789	WC0840433	
Sample Date		Client Info		08 Nov 2023	26 Aug 2023	
Machine Age	hrs	Client Info		37336	36811	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ATTENTION	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water	•	WC Method		NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	nom		>20	14	8	motory
Chromium	ppm			3	0	
	ppm	ASTM D5185m		-		
Nickel	ppm	ASTM D5185m	>10	<1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	10	0	0	
Aluminum	ppm	ASTM D5185m		2	<1	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>75	1	<1	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		5	0	
Barium	ppm	ASTM D5185m		5	0	
Molybdenum	ppm	ASTM D5185m		4	3	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		21	23	
Calcium	ppm	ASTM D5185m		86	82	
Phosphorus	ppm	ASTM D5185m		465	438	
Zinc	ppm	ASTM D5185m		562	574	
Sulfur	ppm	ASTM D5185m		4632	5973	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	<1	
Sodium	ppm	ASTM D5185m		2	2	
Potassium	ppm	ASTM D5185m	>20	<1	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	6403		
Particles >6µm		ASTM D7647	>1300	537		
Particles >14µm		ASTM D7647	>160	50		
Particles >21µm		ASTM D7647		13		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 20/16/13		
	-	()				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g ASTM D8045


Report Id: INT110NEW [WUSCAR] 06013962 (Generated: 11/22/2023 11:37:16) Rev: 1

Contact/Location: Robert Witynski - INT110NEW

0.42



OIL ANALYSIS REPORT

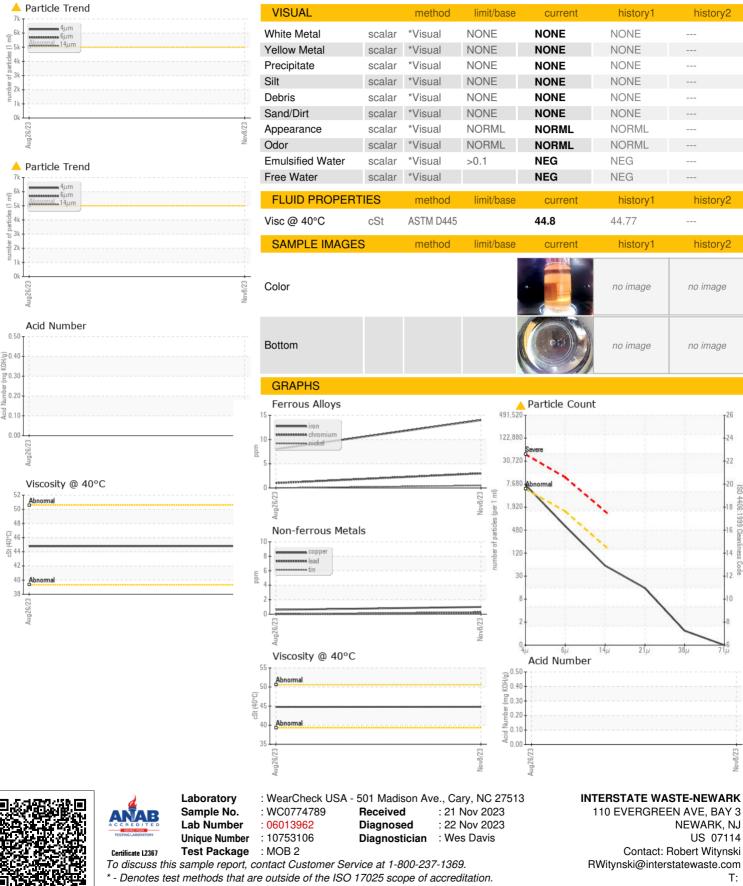

Contact/Location: Robert Witynski - INT110NEW

NEWARK, NJ

US 07114

T:

F:

history2

history2

history2

no image

no imade

4406

:1999 Cle

14

28/