

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Not GIVEN PTK0004644 (S/N NO INFO ON SIF/BOTTLE)

Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Nov2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0004644		
Sample Date		Client Info		20 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	<1		
/anadium	ppm	ASTM D5185m	~20	0		
Cadmium		ASTM D5185m		۰ <1		
	ppm		Line it de la la			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
Barium	ppm	ASTM D5185m		4		
Molybdenum	ppm	ASTM D5185m		2		
Manganese	ppm	ASTM D5185m		<1		
Vagnesium	ppm	ASTM D5185m		13		
Calcium	ppm	ASTM D5185m		56		
Phosphorus	ppm	ASTM D5185m		310		
Zinc	ppm	ASTM D5185m		353		
Sulfur	ppm	ASTM D5185m		798		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8787		
Particles >6µm		ASTM D7647	>2500	1047		
Particles >14µm		ASTM D7647	>320	52		
Particles >21µm		ASTM D7647	>80	14		
Particles >38μm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>18/15	17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.31		
·08·57) Boy: 1	U U		0		· Service Mana	


Report Id: AMPLITGA [WUSCAR] 06013979 (Generated: 11/23/2023 14:08:57) Rev: 1


Contact/Location: Service Manager - AMPLITGA




OIL ANALYSIS REPORT

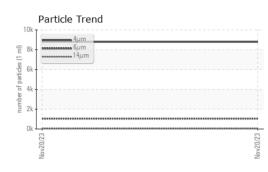

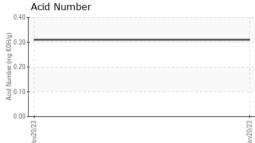

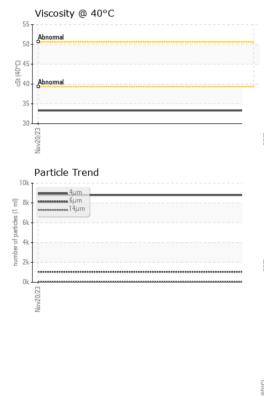

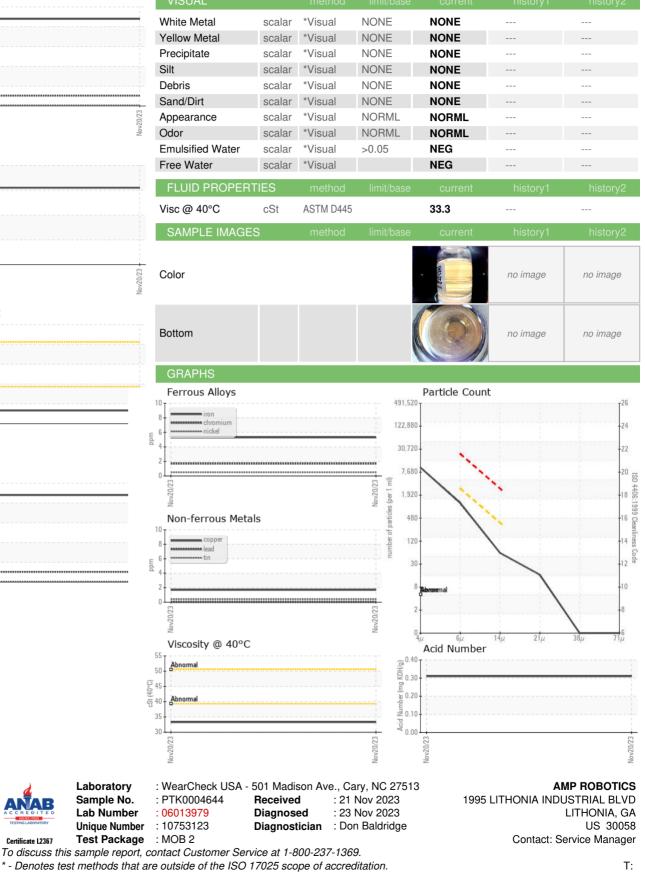

Certificate L2367

Laboratory

Sample No.

Lab Number

Unique Number

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - AMPLITGA

T:

F: