

OIL ANALYSIS REPORT

FILMS DEPARTMENT SAMPLES LUFKIN/WELEX 2A (S/N 242-40478) Component

Gearbox

Fluic **TEXACO REGAL OIL R&O 220 (25 GAL)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

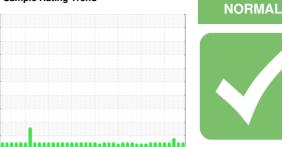



Sample Rating Trend


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0869564	WC0757268	WC0757213
Sample Date		Client Info		20 Nov 2023	04 Apr 2023	08 Feb 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	7	10	30
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	0	<1
Lead	ppm	ASTM D5185m	>100	<1	<1	0
Copper	ppm	ASTM D5185m	>200	6	1	1
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0	1
Barium	ppm	ASTM D5185m	0	4	0	<1
Molybdenum	ppm	ASTM D5185m	0	2	<1	2
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	0	0	0	4
Calcium	ppm	ASTM D5185m	0	<1	0	29
Phosphorus	ppm	ASTM D5185m	0	100	96	169
Zinc	ppm	ASTM D5185m	0	<1	5	17
Sulfur	ppm	ASTM D5185m	4046	3152	2821	6073
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	34	32	8
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3870	702	71379
Particles >6µm		ASTM D7647	>5000	1805	186	<u> </u>
Particles >14µm		ASTM D7647	>640	278	21	73
Particles >21µm		ASTM D7647	>160	41	3	13
Particles >38µm		ASTM D7647	>40	4	0	1
Particles >71µm		ASTM D7647	>10	3	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	19/18/15	17/15/12	▲ 23/20/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Report Id: CRYIOW [WUSCAR] 06014003 (Generated: 11/24/2023 10:34:11) Rev: 1


Contact/Location: KEVIN KETCHERSID - CRYIOW



OIL ANALYSIS REPORT

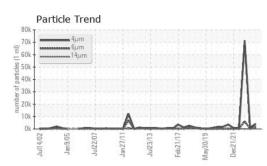

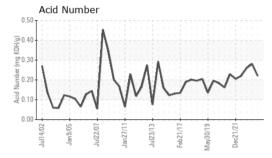

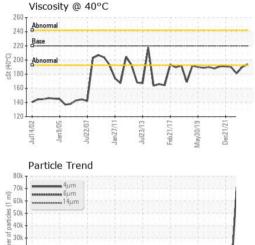


20k

10

01 Jul14/02


10/6 us

White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IEQ	method	limit/base	ourropt	history 1	history
	IES	method	iimii/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	194	190	181
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
						177205
Color						



Bottom



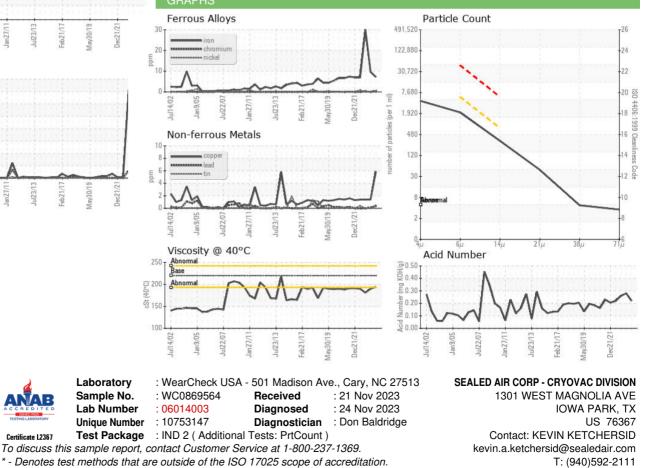

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CRYIOW [WUSCAR] 06014003 (Generated: 11/24/2023 10:34:11) Rev: 1

Certificate L2367

Contact/Location: KEVIN KETCHERSID - CRYIOW

F: (940)592-2513