




# OIL ANALYSIS REPORT

Sample Rating Trend

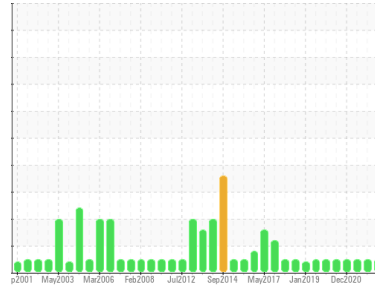

**NORMAL**



Area  
**BARRIER DEPARTMENT SAMPLES**  
 Machine Id  
**REIFENHAUSER WEB 15 F**

Component  
**Gearbox**  
 Fluid  
**TEXACO MEROPA 220 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0869518</b>	WC0692862	WC0608725
Sample Date	Client Info			<b>20 Nov 2023</b>	30 Oct 2022	24 Jan 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>9</b>	7	7
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>3</b>	2	3
Tin	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	3.2	<b>3</b>	2	16
Barium	ppm	ASTM D5185m	0.5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.1	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0.1	<b>2</b>	0	0
Calcium	ppm	ASTM D5185m	1.6	<b>11</b>	11	13
Phosphorus	ppm	ASTM D5185m	159	<b>201</b>	195	206
Zinc	ppm	ASTM D5185m	0.5	<b>0</b>	4	5
Sulfur	ppm	ASTM D5185m	10342	<b>11071</b>	10896	9387

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	1	1
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>21643</b>	26283	18826
Particles >6µm		ASTM D7647	>5000	<b>3314</b>	3429	2207
Particles >14µm		ASTM D7647	>640	<b>58</b>	99	93
Particles >21µm		ASTM D7647	>160	<b>9</b>	10	20
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/19/16	<b>22/19/13</b>	22/19/14	21/18/14



# OIL ANALYSIS REPORT

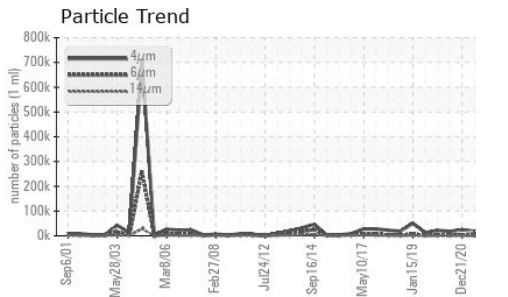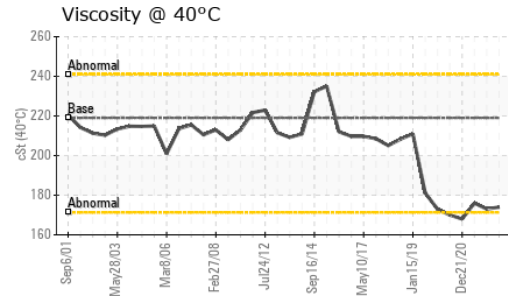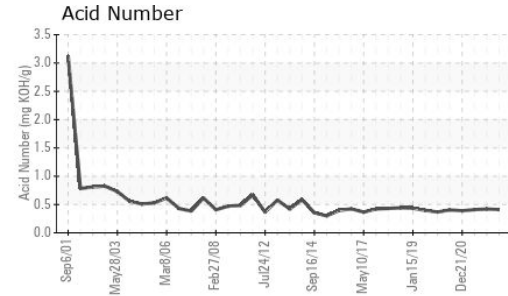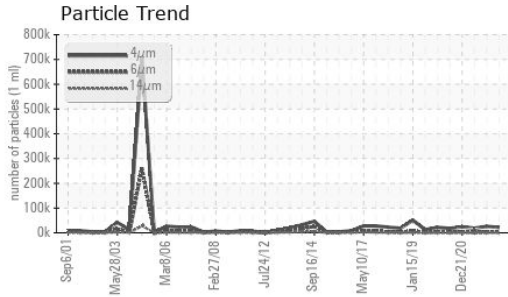


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.41</b>	0.42	0.41






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	219	<b>174</b>	173	176

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

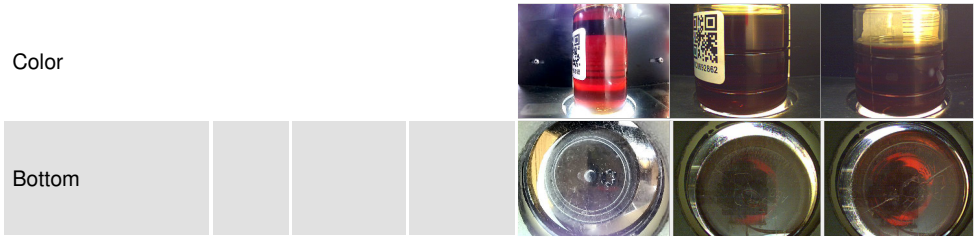

## GRAPHS

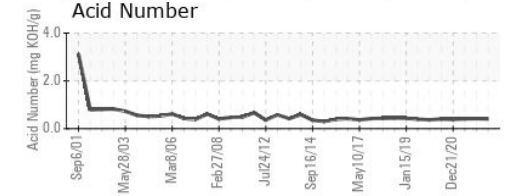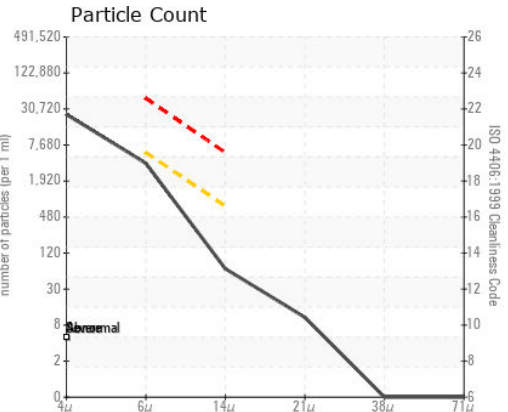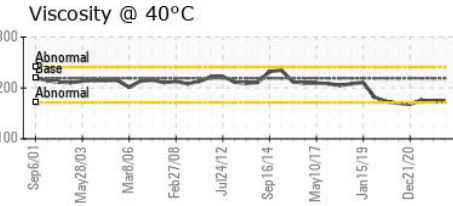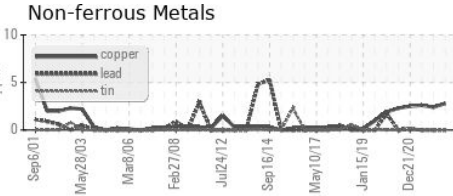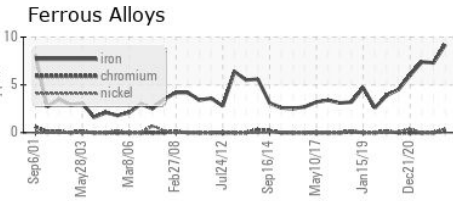

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0869518 **Received** : 21 Nov 2023  
**Lab Number** : **06014012** **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10753156 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**SEALED AIR CORP - CRYOVAC DIVISION**  
 1301 WEST MAGNOLIA AVE  
 IOWA PARK, TX  
 US 76367  
 Contact: KEVIN KETCHERSID  
 kevin.a.ketchersid@sealedair.com  
 T: (940)592-2111  
 F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)