


# PROBLEM SUMMARY

Sample Rating Trend




ISO

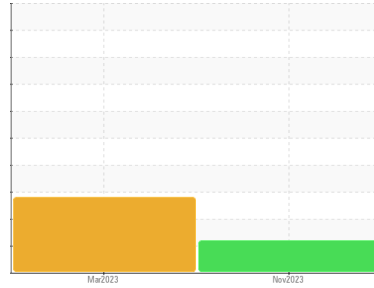

Area  
**Wax Cups**  
Machine Id  
**POS 54**  
Component  
**Unknown Component**  
Fluid  
**TULCO LUBSOIL INDUSTRIAL GEAR OIL 150 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

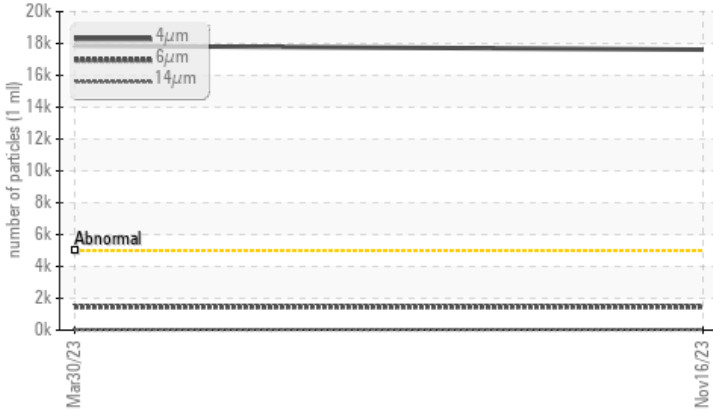

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	ABNORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ <b>17617</b>	▲ 17862	---
Particles >6µm	ASTM D7647	>1300	▲ <b>1463</b>	▲ 1453	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/18/12</b>	▲ 21/18/12	---

**Customer Id:** DARDALTX  
**Sample No.:** TO50001529  
**Lab Number:** 06014045  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS

30 Mar 2023 Diag: Doug Bogart

DIRT




We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the sample. Elemental level of silicon (Si) above normal indicating ingress of seal material. The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

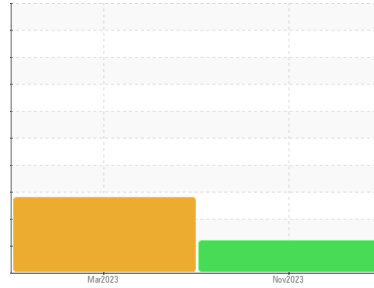

Area  
**Wax Cups**  
 Machine Id  
**POS 54**  
 Component  
**Unknown Component**  
 Fluid  
**TULCO LUBSOIL INDUSTRIAL GEAR OIL 150 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a high amount of silt (particulates < 14 microns in size) present in the sample.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the sample is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO50001529</b>	TO50001601	---
Sample Date	Client Info		<b>16 Nov 2023</b>	30 Mar 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>8</b>	29	---
Iron	ppm	ASTM D5185m	<b>18</b>	15	---
Chromium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	<b>4</b>	4	---
Tin	ppm	ASTM D5185m	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---






ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	13	<b>&lt;1</b>	0
Barium	ppm	ASTM D5185m		<b>0</b>	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	9
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	0
Phosphorus	ppm	ASTM D5185m	170	<b>250</b>	244
Zinc	ppm	ASTM D5185m		<b>21</b>	26
Sulfur	ppm	ASTM D5185m	6300	<b>6639</b>	6609

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<b>633</b>	▲ 847
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1
Water	%	ASTM D6304		<b>0.011</b>	0.001
ppm Water	ppm	ASTM D6304		<b>117</b>	4.6

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ <b>17617</b>	▲ 17862	---
Particles >6µm	ASTM D7647	>1300	▲ <b>1463</b>	▲ 1453	---
Particles >14µm	ASTM D7647	>160	<b>33</b>	28	---
Particles >21µm	ASTM D7647	>40	<b>8</b>	8	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>2</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/18/12</b>	▲ 21/18/12	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.49</b>	0.58	---

# OIL ANALYSIS REPORT

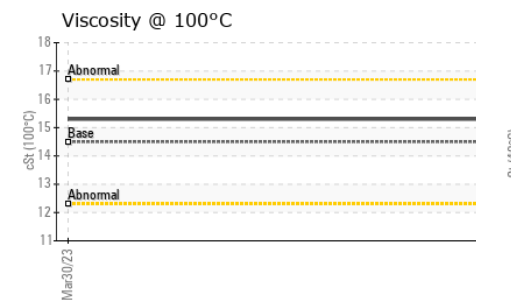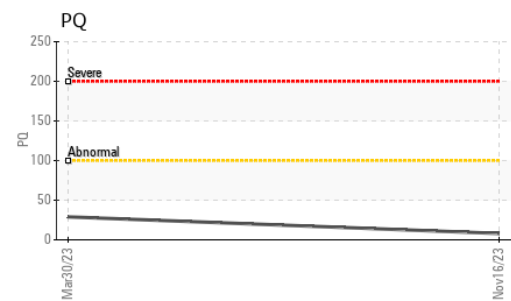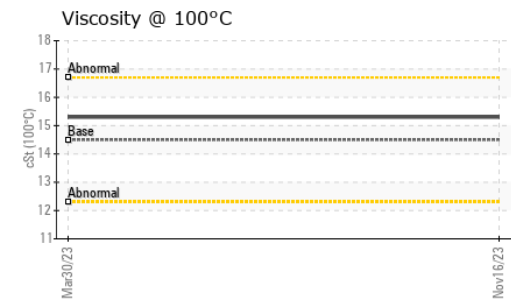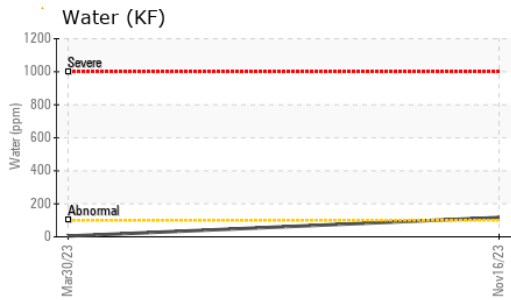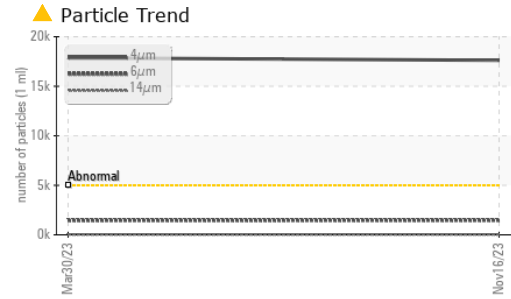






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	148	160	---
Visc @ 100°C	cSt	ASTM D445	14.5	15.3	---
Viscosity Index (VI)	Scale	ASTM D2270	96	96	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					



## GRAPHS

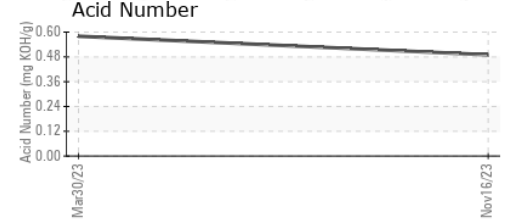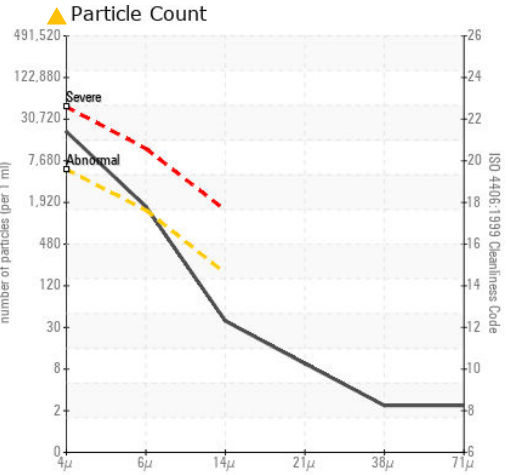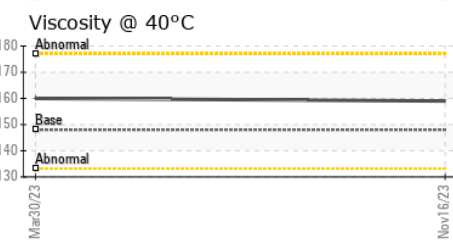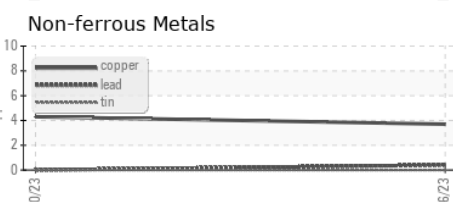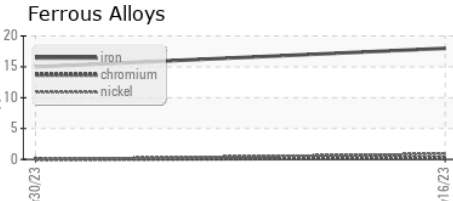

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50001529 **Received** : 21 Nov 2023  
**Lab Number** : 06014045 **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10753189 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, PrtCount, VI )

**DART CONTAINER CORPORATION**  
 4444 W LEADBETTER DR  
 DALLAS, TX  
 US 75236  
 Contact: YON PALOMINO  
 yon.palomino@dart.biz  
 T: (214)775-5673  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)