

OIL ANALYSIS REPORT

Refrigeration Compressor FRICK TYSCJ 14FRK (S/N S0015EFPPTHCA3) Component

Refrigeration Compressor USPI 1009-68 SC (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003605	USP249556	USP217371
Sample Date		Client Info		14 Nov 2023	26 Aug 2023	28 Jun 2023
Machine Age	hrs	Client Info		2908	21420	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron		ASTM D5185m	>8	0	0	<1
Chromium	ppm	ASTM D5185m		0 <1	0	0
Nickel	ppm		>2	<1	0	0
	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m	0		0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		<1	0	0
Phosphorus	ppm	ASTM D5185m		1	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	0
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.01	0.003	0.002	0.001
ppm Water	ppm	ASTM D6304		28	21.5	7.1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1309	1704	3113
Particles >6µm		ASTM D7647	>2500	334	280	737
Particles >14µm		ASTM D7647	>320	13	32	21
Particles >21µm		ASTM D7647		2	10	5
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	18/16/11	18/15/12	19/17/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.016	0.015

Acid Number (AN)


0.014


Contact/Location: THOMAS SCHREIBER - IBPCOL01


NORMAL




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	66.2	66.4	67.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom				6	(3)	

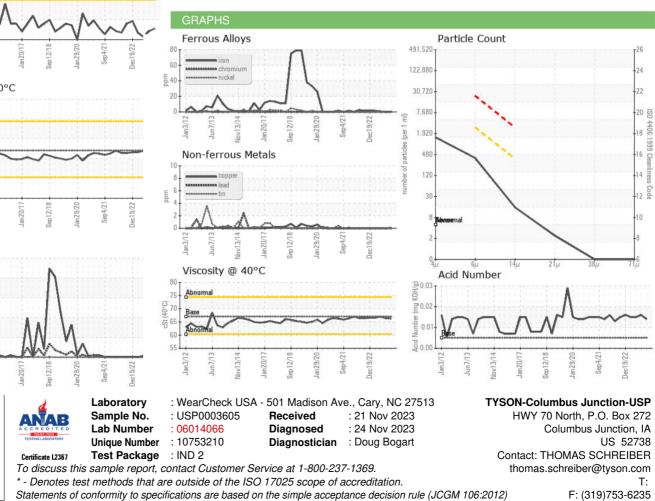

Contact/Location: THOMAS SCHREIBER - IBPCOL01