


PROBLEM SUMMARY

PATTONS 4010-5 Machine Id ELGI MSGL061260 - PLASTEK GROUP

Compressor

Sample Rating Trend VISCOSITY

COMPONENT CONDITION SUMMARY

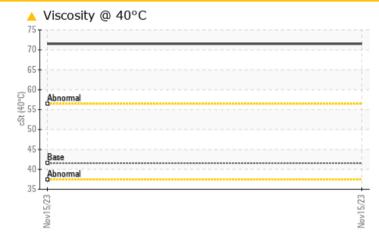

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RE	SULTS			
Sample Status				ATTENTION	
Visc @ 40°C	cSt	ASTM D445	41.57	A 71.52	

Customer Id: UCLEWCHA Sample No.: UCH06014106 Lab Number: 06014106 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

PATTONS 4010-5 Machine Id ELGI MSGL061260 - PLASTEK GROUP

Compressor

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.


Sample Rating Trend	VISCOSITY
Nov2023	


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH06014106		
Sample Date		Client Info		15 Nov 2023		
Machine Age	hrs	Client Info		24447		
Oil Age	hrs	Client Info		8000		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0.4	0		
Molybdenum	ppm	ASTM D5185m	0.5	<1		
Manganese	ppm	ASTM D5185m	0.4	0		
Magnesium	ppm	ASTM D5185m	0	<1		
Calcium	ppm	ASTM D5185m	0.3	0		
Phosphorus	ppm	ASTM D5185m	1376	414		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	320	79		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.573	1.27		



OIL ANALYSIS REPORT

VISUAL





White Metal		method	limit/base	current	history1	history2
	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	41.57	A 71.52		
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys						
8 iron						
6 - nickel						
4						
2						
2 2 2			723			
lov15/			lov15/			
-	s		N			
⁰ T	J					
8 - copper						
6 tin						
* +						
2						
5/23			5/23			
Nov1			Nov1			
Viscosity @ 40°C				Acid Number		
			(B/)			
			KOH			
o				1.0		
o			ber (mg	1.0 - Base		
0-			Number (mg	1.0 - Base		
0 - Abnormal - Base			Acid N	J.U		
0 - Abnormal 0 - Base 0 - Base Christiania			Nev15/23	1.0 Base 0.0 EZ/S 1/00		
	Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color Bottom GRAPHS Ferrous Alloys	Sand/Dirt scalar Appearance scalar Odor scalar Emulsified Water scalar Free Water scalar FLUID PROPERTIES Visc @ 40°C cSt SAMPLE IMAGES Color Bottom GRAPHS Ferrous Alloys Image: Standard St	Sand/Dirt scalar *Visual Appearance scalar *Visual Odor scalar *Visual Emulsified Water scalar *Visual Free Water scalar *Visual FLUID PROPERTIES method Visc @ 40°C cSt ASTM D445 SAMPLE IMAGES method Color Bottom GRAPHS Ferrous Alloys Mon-ferrous Metals	Sand/Dirt scalar *Visual NONE Appearance scalar *Visual NORML Odor scalar *Visual NORML Emulsified Water scalar *Visual >0.1 Free Water scalar *Visual FLUID PROPERTIES method limit/base Visc @ 40°C cSt ASTM D445 41.57 SAMPLE IMAGES method limit/base Color Bottom GRAPHS Ferrous Alloys Mon-ferrous Metals	Sand/Dirt scalar *Visual NONE NONE Appearance scalar *Visual NORML NORML Odor scalar *Visual NORML NORML Odor scalar *Visual NORML NORML Emulsified Water scalar *Visual >0.1 NEG Free Water scalar *Visual >0.1 NEG Free Water scalar *Visual >0.1 NEG Free Water scalar *Visual 1mit/base current Visc @ 40°C cSt ASTM D445 41.57 A 71.52 SAMPLE IMAGES method limit/base current Color Samethod limit/base current Bottom Imit/base current Sector Samethod limit/base current Color Imit/base current GRAPHS Samethod limit/base current Ferrous Alloys Imit/base scalar Imit References Imit References Imit References Imit References Imit References Imit Refere	Sand/Dirt scalar *Visual NONE NONE Appearance scalar *Visual NORML NORML Appearance scalar *Visual NORML NORML Emulsified Water scalar *Visual >0.1 NEG Emulsified Water scalar *Visual >0.1 NEG Free Water scalar *Visual *1.57 * T.52 SAMPLE IMAGES method limit/base current history1 Color

method limit/base current

history1 history2

Ē

Contact/Location: JOE KERLEY - UCLEWCHA