




OIL ANALYSIS REPORT



Area
Action Newark
 Machine Id
CATERPILLAR 966H 5583 (S/N A6D02838)
 Component
Transmission
 Fluid
NOT GIVEN (--- GAL)

Sample Rating Trend

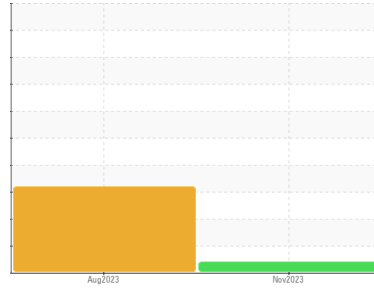

VIS DEBRIS



DIAGNOSIS

▲ Recommendation

We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Moderate concentration of visible dirt/debris present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0774793	WC0840435	---
Sample Date	Client Info		08 Nov 2023	26 Aug 2023	---
Machine Age	hrs	Client Info	37336	36811	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			MARGINAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >46	10	16	---
Chromium	ppm	ASTM D5185m >4	0	<1	---
Nickel	ppm	ASTM D5185m	0	0	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m	<1	0	---
Aluminum	ppm	ASTM D5185m >9	2	▲ 10	---
Lead	ppm	ASTM D5185m >50	<1	7	---
Copper	ppm	ASTM D5185m >21	17	▲ 30	---
Tin	ppm	ASTM D5185m >10	<1	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	---
Barium	ppm	ASTM D5185m	0	2	---
Molybdenum	ppm	ASTM D5185m	0	2	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	10	22	---
Calcium	ppm	ASTM D5185m	1766	3299	---
Phosphorus	ppm	ASTM D5185m	778	893	---
Zinc	ppm	ASTM D5185m	764	1096	---
Sulfur	ppm	ASTM D5185m	12299	3858	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >31	18	▲ 32	---
Sodium	ppm	ASTM D5185m	3	0	---
Potassium	ppm	ASTM D5185m >20	0	5	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.50	---	---



OIL ANALYSIS REPORT

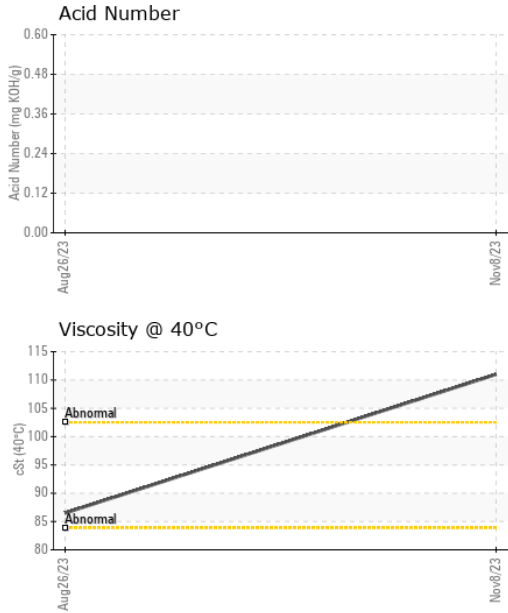





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	111	86.5	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

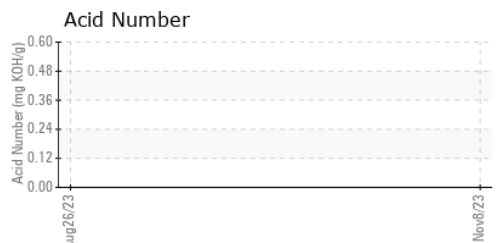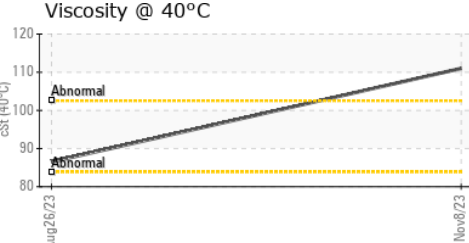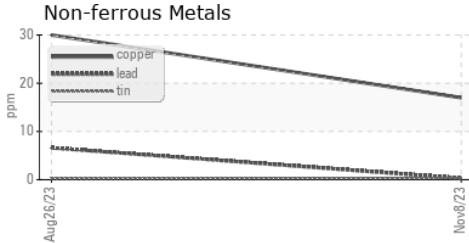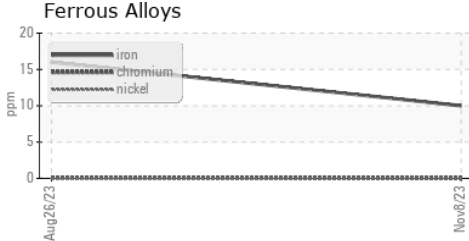

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0774793 **Received** : 21 Nov 2023
Lab Number : 06014167 **Diagnosed** : 24 Nov 2023
Unique Number : 10753311 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PrtCount)

INTERSTATE WASTE-NEWARK
 110 EVERGREEN AVE, BAY 3
 NEWARK, NJ
 US 07114
 Contact: Robert Witynski
 RWitynski@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: