




OIL ANALYSIS REPORT

Sample Rating Trend

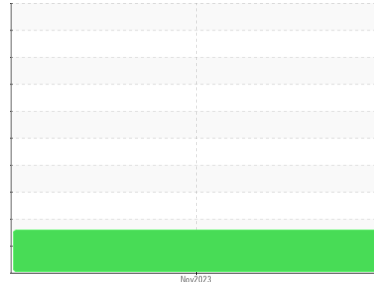

WATER



Machine Id
LEXUS 24867-03

Component
Gasoline Engine

Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of water entry.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate concentration of water present in the oil. Test for glycol is negative.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCM2005013	---	---
Sample Date	Client Info		20 Nov 2023	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	2	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >40	3	---	---
Lead	ppm	ASTM D5185m >50	0	---	---
Copper	ppm	ASTM D5185m >155	<1	---	---
Tin	ppm	ASTM D5185m >10	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	81	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	75	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	498	---	---
Calcium	ppm	ASTM D5185m	949	---	---
Phosphorus	ppm	ASTM D5185m	588	---	---
Zinc	ppm	ASTM D5185m	685	---	---
Sulfur	ppm	ASTM D5185m	2447	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	9	---	---
Sodium	ppm	ASTM D5185m >400	0	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---
Water	%	ASTM D6304 >0.2	▲ 0.787	---	---
ppm Water	ppm	ASTM D6304 >2000	▲ 7870	---	---
Glycol	%	*ASTM D2982	NEG	---	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	16.9	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.0	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.41	---	---










OIL ANALYSIS REPORT

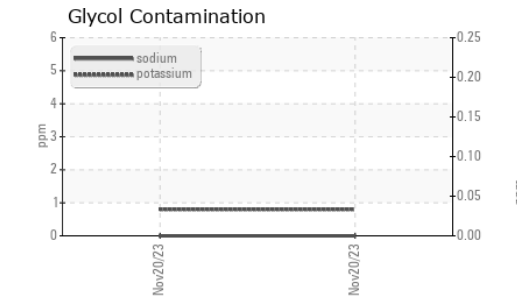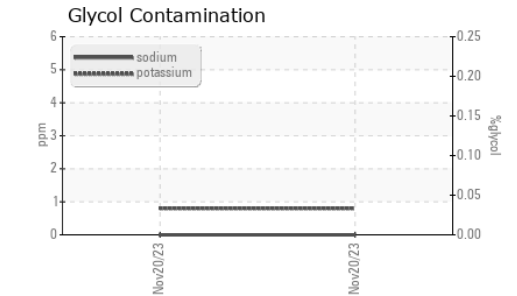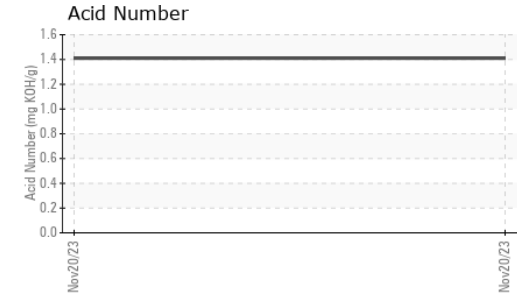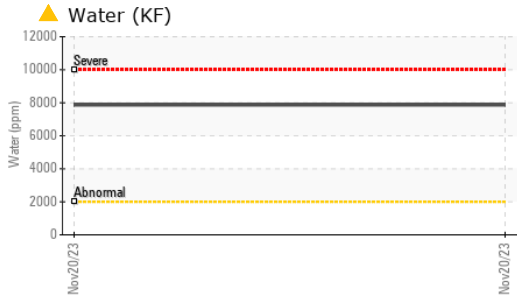

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	9.8	---	---

GRAPHS

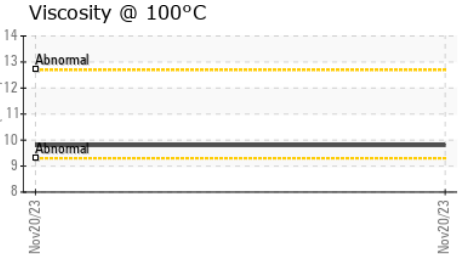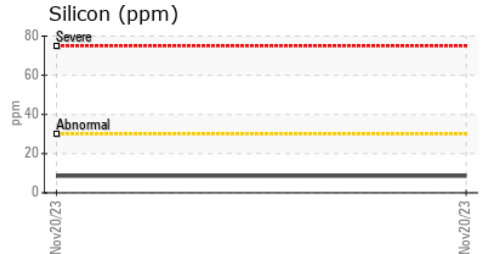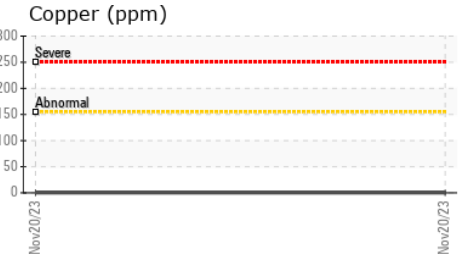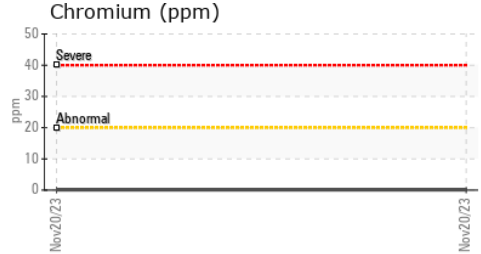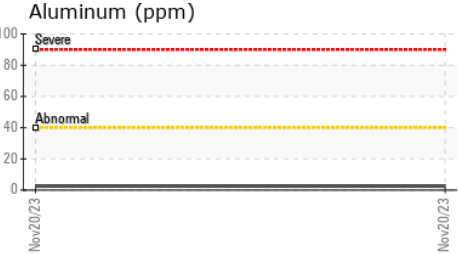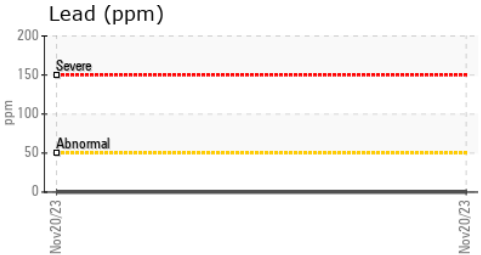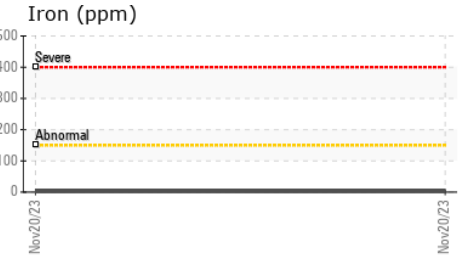

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM2005013 **Received** : 21 Nov 2023
Lab Number : 06014169 **Diagnosed** : 24 Nov 2023
Unique Number : 10753313 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: Glycol, KF)

SOUTHERN AUTOMOTIVE CONSULTING
 P.O. BOX 730
 CREEDMOOR, NC
 US 27522
 Contact: ANDREW MORTON
 andymorton711@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: