



# OIL ANALYSIS REPORT

Sample Rating Trend


GLYCOL



Machine Id  
**SHUTTLELIFT 5560B CD0718 (S/N 320718)**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

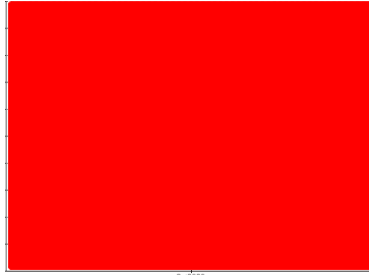

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Cylinder, crank, or cam shaft wear is indicated. Bearing and/or bushing wear is indicated.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is positive. There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>HPL0002519</b>	---	---
Sample Date	Client Info		<b>31 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>2981</b>	---	---
Oil Age	hrs	Client Info	<b>603</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>▲ 132</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>17</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>▲ 12</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>▲ 139</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>18</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>15</b>	---	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 100	<b>269</b>	---	---
Manganese	ppm	ASTM D5185m	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m 450	<b>426</b>	---	---
Calcium	ppm	ASTM D5185m 3000	<b>1885</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>643</b>	---	---
Zinc	ppm	ASTM D5185m 1350	<b>743</b>	---	---
Sulfur	ppm	ASTM D5185m 4250	<b>7061</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>▲ 51</b>	---	---
Sodium	ppm	ASTM D5185m >158	<b>▲ 822</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>▲ 455</b>	---	---
Fuel	%	ASTM D3524 >5	<b>▲ 17.7</b>	---	---
Glycol	%	*ASTM D2982	<b>● 0.10</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>17.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>44.7</b>	---	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>41.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.96</b>	---	---




# OIL ANALYSIS REPORT


## Glycol Contamination

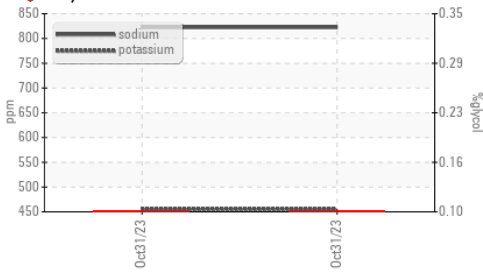


## Fuel Dilution

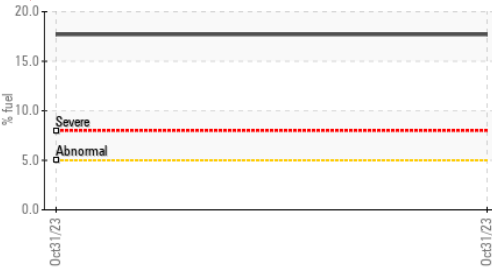


## Non-ferrous Metals

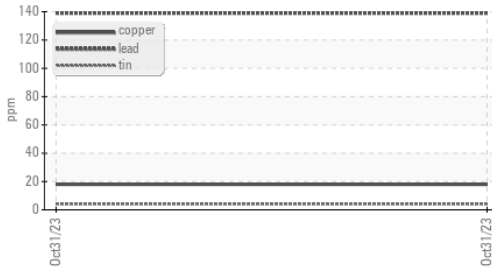

## Ferrous Alloys

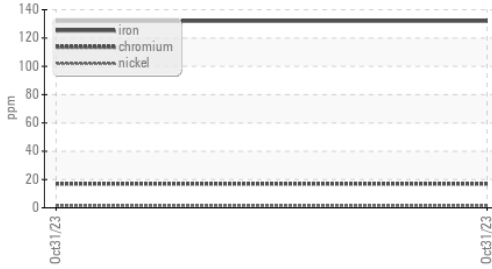

## Ferrous Alloys

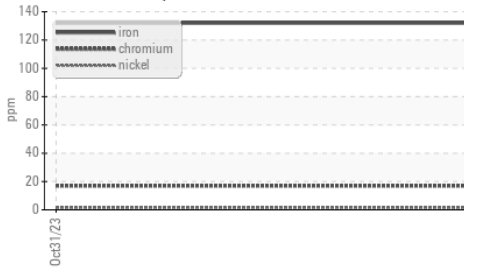


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 10.2	---

## GRAPHS


### Iron (ppm)

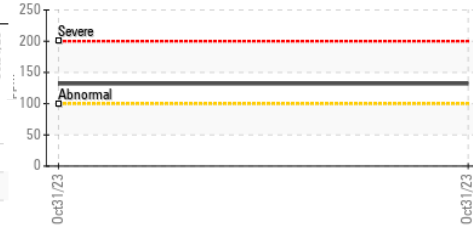

### Lead (ppm)

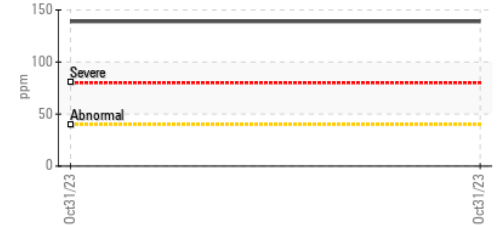


### Aluminum (ppm)

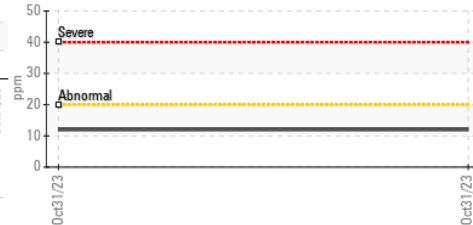


### Chromium (ppm)




### Copper (ppm)

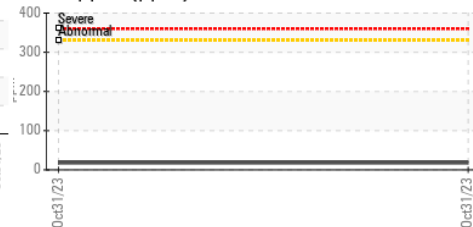

### Silicon (ppm)

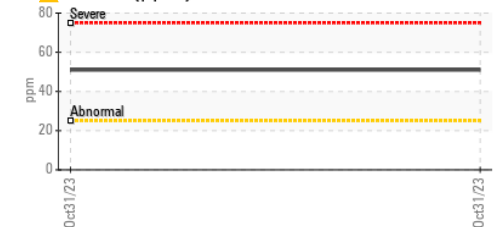

### Viscosity @ 100°C

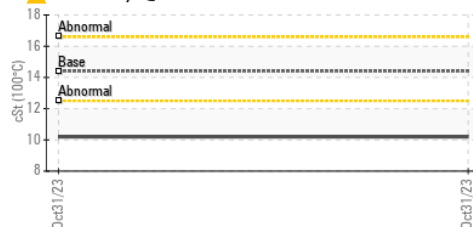

### Base Number



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0002519 **Received** : 21 Nov 2023  
**Lab Number** : 06014198 **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10753342 **Diagnostician** : Doug Bogart  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, Glycol, PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440

Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com

T: (630)972-9199

F: