OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id
TOTE 2
Component
New (Unused) Oil
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation
This is a baseline read-out on the submitted sample.

Contamination
There is a high amount of silt (particulates < 14 microns in size) present in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC06014387**	---	---
Sample Date		Client Info		**20 Nov 2023**	---	---
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**N/A**	---	---
Sample Status				**ABNORMAL**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		**0**	---	---
Chromium	ppm	ASTM D5185m		**0**	---	---
Nickel	ppm	ASTM D5185m		**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m		**<1**	---	---
Lead	ppm	ASTM D5185m		**<1**	---	---
Copper	ppm	ASTM D5185m		**<1**	---	---
Tin	ppm	ASTM D5185m		**0**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**0**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**0**	---	---
Calcium	ppm	ASTM D5185m		**101**	---	---
Phosphorus	ppm	ASTM D5185m		**296**	---	---
Zinc	ppm	ASTM D5185m		**457**	---	---
Sulfur	ppm	ASTM D5185m		**1081**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		**4**	---	---
Sodium	ppm	ASTM D5185m		**2**	---	---
Potassium	ppm	ASTM D5185m	>20	**4**	---	---
Water	%	ASTM D6304		**NEG**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**83593**	---	---
Particles >6µm		ASTM D7647	>1300	▲ **8357**	---	---
Particles >14µm		ASTM D7647	>160	**160**	---	---
Particles >21µm		ASTM D7647	>40	**44**	---	---
Particles >38µm		ASTM D7647	>10	**1**	---	---
Particles >71µm		ASTM D7647	>3	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>--/17/14	▲ **24/20/14**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.30**	---	---

OIL ANALYSIS REPORT

Particle Trend

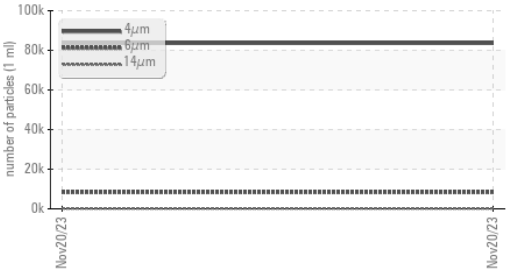

Particle Trend

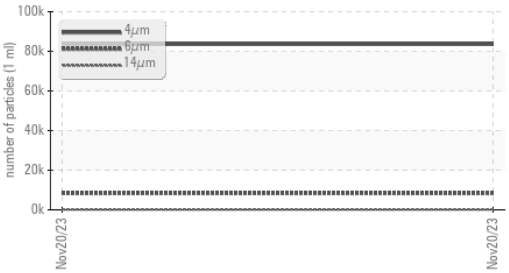

Viscosity @ 100°C

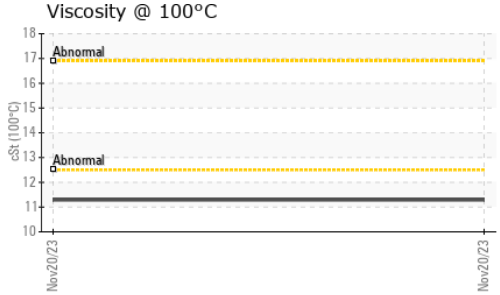

Viscosity @ 40°C

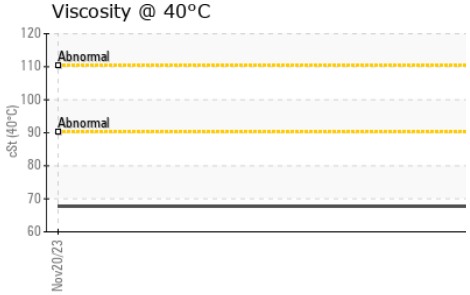

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual		**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**67.76**	---	---
Visc @ 100°C	cSt	ASTM D445		**11.29**	---	---
Viscosity Index (VI)	Scale	ASTM D2270		**160**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

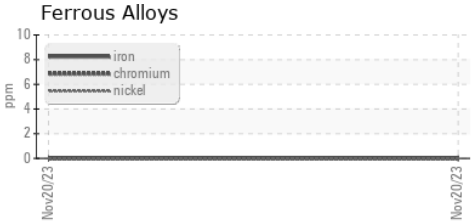

Non-ferrous Metals

Viscosity @ 40°C

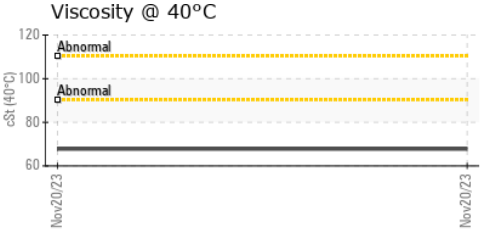

Particle Count

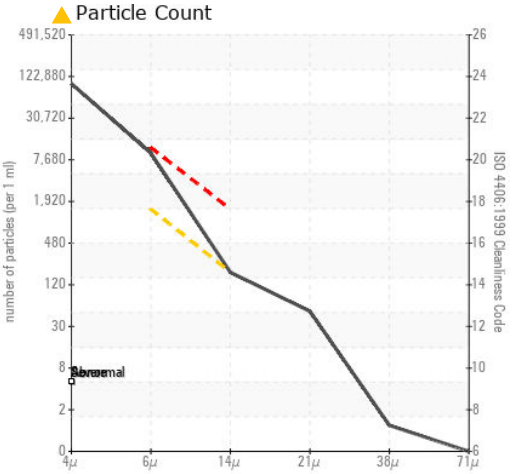

Acid Number

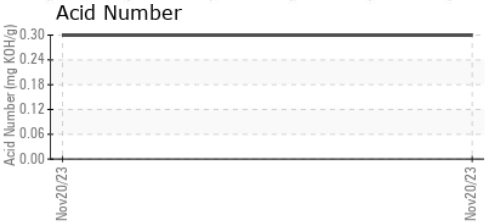

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06014387 **Received** : 21 Nov 2023
Lab Number : 06014387 **Diagnosed** : 27 Nov 2023
Unique Number : 10753531 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SAMPSON-BLADEN OIL COMPANY, INC.
PO BOX 469
CLINTON, NC
US 28329
Contact: BOB FAIRCLOTH
bob.faircloth@sampsonbladen.com
T: (800)341-9266
F: (910)596-0206