




OIL ANALYSIS REPORT

Sample Rating Trend

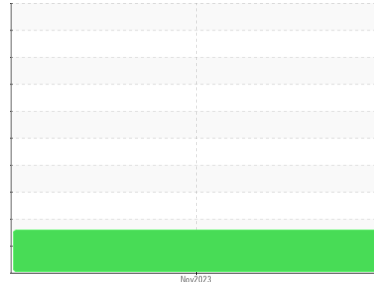

ISO



Machine Id

TOTE 1

Component

New (Unused) Oil

Fluid

{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

This is a baseline read-out on the submitted sample.

▲ Contamination

There is a high amount of particulates present in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC06014388	---	---
Sample Date	Client Info	20 Nov 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	0	---	---
Chromium	ppm ASTM D5185m	0	---	---
Nickel	ppm ASTM D5185m	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m	<1	---	---
Lead	ppm ASTM D5185m	<1	---	---
Copper	ppm ASTM D5185m	<1	---	---
Tin	ppm ASTM D5185m	0	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	---	---
Barium	ppm ASTM D5185m	0	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	0	---	---
Magnesium	ppm ASTM D5185m	0	---	---
Calcium	ppm ASTM D5185m	104	---	---
Phosphorus	ppm ASTM D5185m	303	---	---
Zinc	ppm ASTM D5185m	464	---	---
Sulfur	ppm ASTM D5185m	1099	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	4	---	---
Sodium	ppm ASTM D5185m	2	---	---
Potassium	ppm ASTM D5185m	>20	---	---
Water	% ASTM D6304	NEG	---	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	87151	---	---
Particles >6µm	ASTM D7647	>1300	---	---
Particles >14µm	ASTM D7647	>160	---	---
Particles >21µm	ASTM D7647	>40	---	---
Particles >38µm	ASTM D7647	>10	---	---
Particles >71µm	ASTM D7647	>3	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/14	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.28	---	---



OIL ANALYSIS REPORT

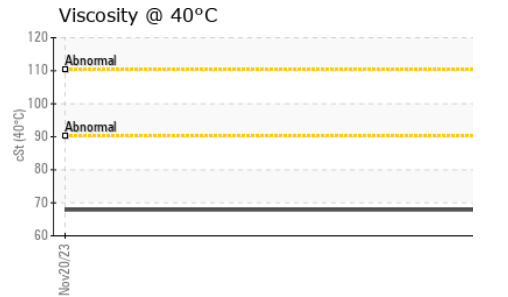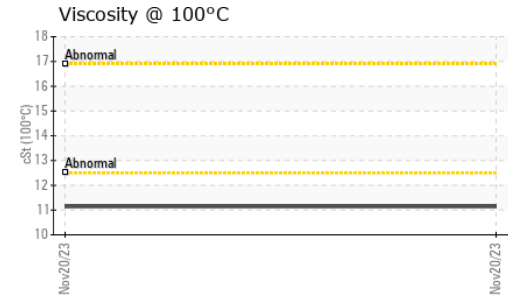
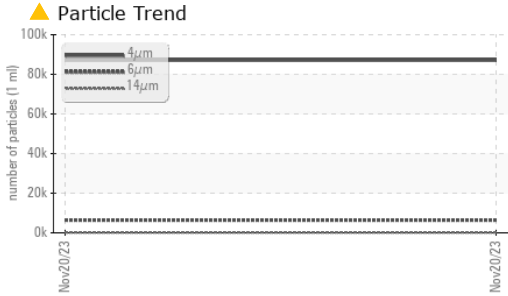
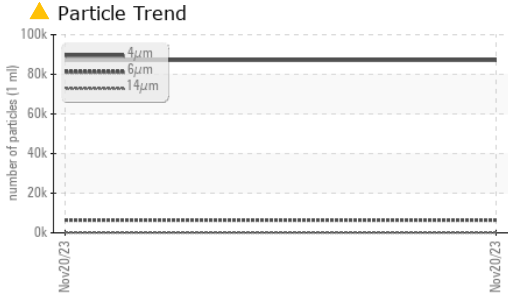


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	NEG	---	---	
Free Water	scalar	*Visual	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.86	---	---
Visc @ 100°C	cSt	ASTM D445	11.14	---	---
Viscosity Index (VI)	Scale	ASTM D2270	156	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

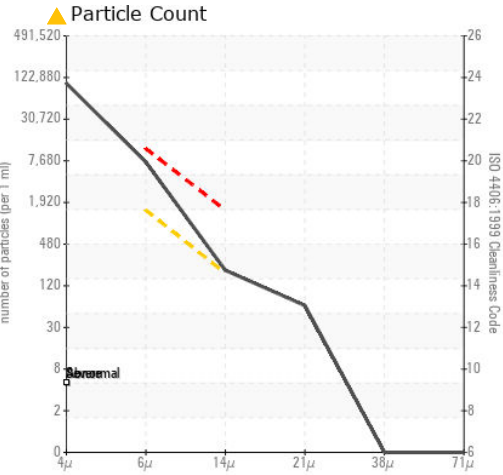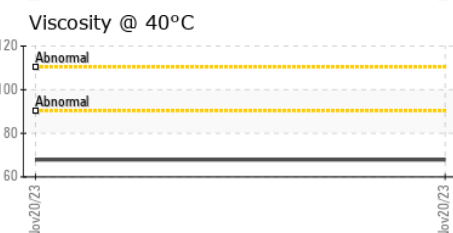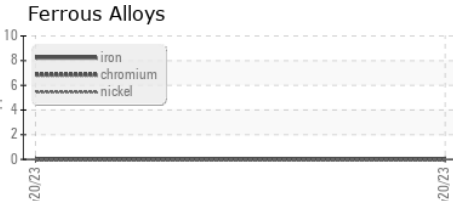

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06014388 **Received** : 21 Nov 2023
Lab Number : 06014388 **Diagnosed** : 27 Nov 2023
Unique Number : 10753532 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI)

SAMPSON-BLADEN OIL COMPANY, INC.
 PO BOX 469
 CLINTON, NC
 US 28329
 Contact: BOB FAIRCLOTH
 bob.faircloth@sampsonbladen.com
 T: (800)341-9266
 F: (910)596-0206

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)