




# PROBLEM SUMMARY

Sample Rating Trend

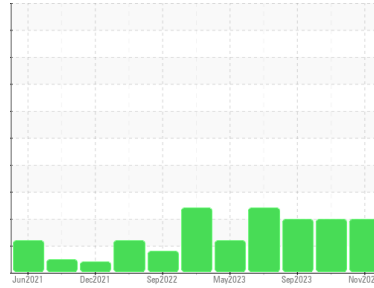


ISO



Area  
**Element 13**  
 Machine Id  
**EL-SP-SHRD-0001-MILL-LUBE-SYST EL-SP-SHRD-0001-MILL-LUBE-SYST**  
 Component  
**Journal Bearing**  
 Fluid  
**QUAKER CHEMICAL QUINTOLUBRIC 888-68 (50 GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

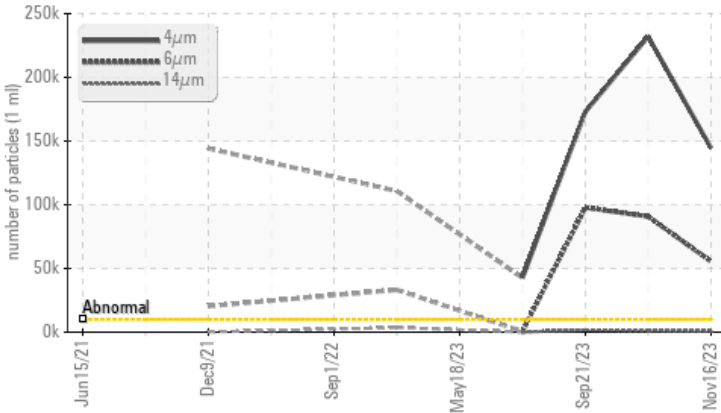

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>10000	▲ 144552	▲ 231940	▲ 173035
Particles >6µm	ASTM D7647	>2500	▲ 55569	▲ 90716	▲ 97818
Particles >14µm	ASTM D7647	>160	▲ 705	▲ 1115	▲ 1749
Particles >21µm	ASTM D7647	>40	▲ 114	▲ 209	▲ 123
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ 24/23/17	▲ 25/24/17	▲ 25/24/18

Customer Id: CONMUSAL  
 Sample No.: KFS0003443  
 Lab Number: 06014517  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS

### 16 Oct 2023 Diag: Jonathan Hester

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 21 Sep 2023 Diag: Don Baldrige

ISO



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 17 Aug 2023 Diag: Doug Bogart

WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 6 microns in size) present in the oil. There is a trace of moisture present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

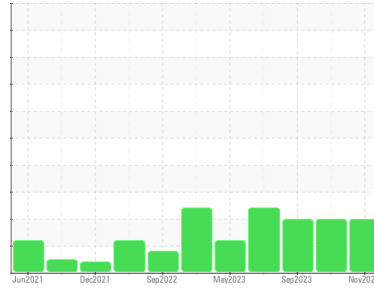

ISO



Area  
**Element 13**  
 Machine Id  
**EL-SP-SHRD-0001-MILL-LUBE-SYST EL-SP-SHRD-0001-MILL-LUBE-SYST**  
 Component  
**Journal Bearing**  
 Fluid  
**QUAKER CHEMICAL QUINTOLUBRIC 888-68 (50 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0003443</b>	KFS0003761	KFS0003762
Sample Date	Client Info	<b>16 Nov 2023</b>	16 Oct 2023	21 Sep 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >60	<b>22</b>	35	42
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >4	<b>2</b>	2	1
Lead	ppm	ASTM D5185m >250	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >125	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m >80	<b>308</b>	311	295
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	2
Calcium	ppm	ASTM D5185m 10	<b>3</b>	9	4
Phosphorus	ppm	ASTM D5185m 200	<b>110</b>	101	113
Zinc	ppm	ASTM D5185m 125	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m 1000	<b>478</b>	570	834

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>3</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	2
Water	%	ASTM D6304 >2	<b>NEG</b>	NEG	NEG
ppm Water	ppm	ASTM D6304	<b>---</b>	---	---


## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>▲ 144552</b>	▲ 231940	▲ 173035
Particles >6µm	ASTM D7647 >2500	<b>▲ 55569</b>	▲ 90716	▲ 97818
Particles >14µm	ASTM D7647 >160	<b>▲ 705</b>	▲ 1115	▲ 1749
Particles >21µm	ASTM D7647 >40	<b>▲ 114</b>	▲ 209	▲ 123
Particles >38µm	ASTM D7647 >10	<b>5</b>	9	1
Particles >71µm	ASTM D7647 >3	<b>1</b>	1	0
Oil Cleanliness	ISO 4406 (c) >20/18/14	<b>▲ 24/23/17</b>	▲ 25/24/17	▲ 25/24/18


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 1.5	<b>1.56</b>	1.45	1.54


### Particle Trend

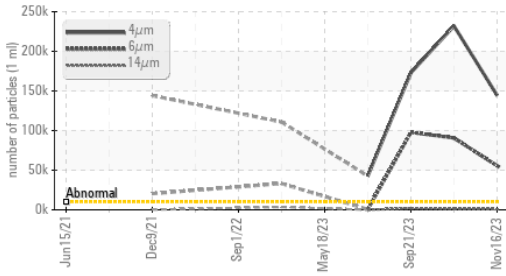


### Water (KF)

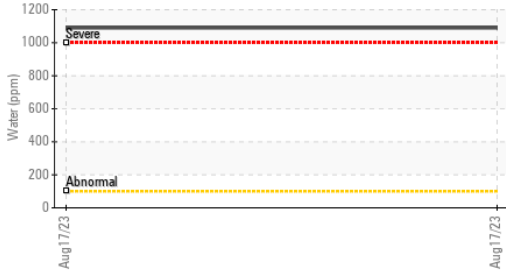


### Acid Number

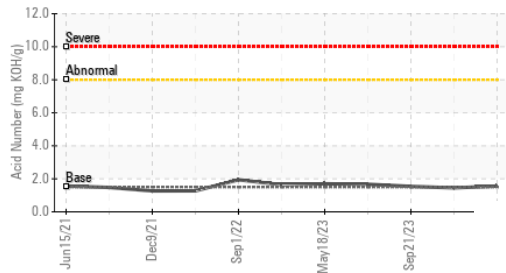

### Viscosity @ 40°C

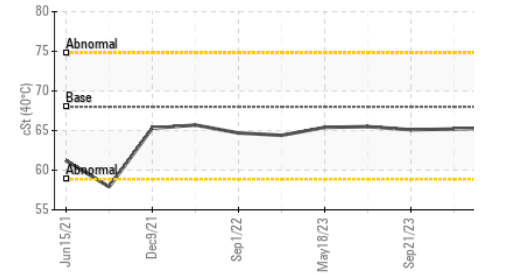


### Water (KF)

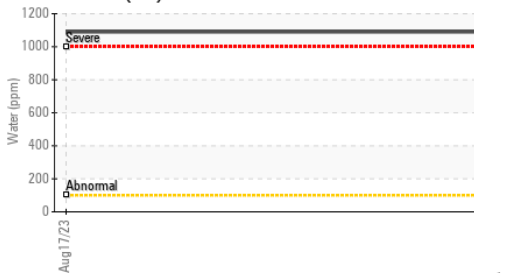

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	65.3	65.2	65.1

### SAMPLE IMAGES

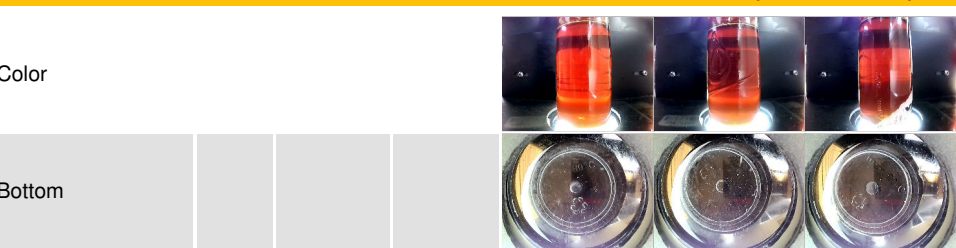


### GRAPHS


#### Ferrous Alloys

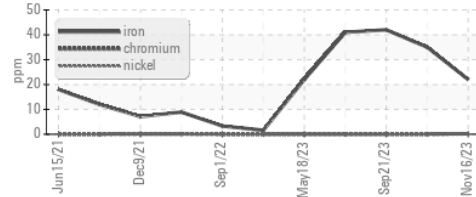


#### Non-ferrous Metals

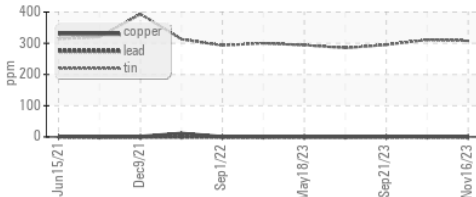


#### Viscosity @ 40°C

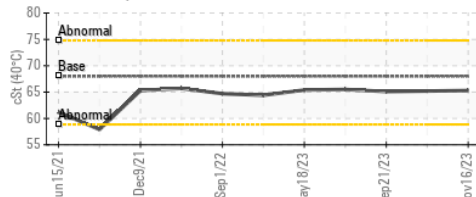

#### Particle Count

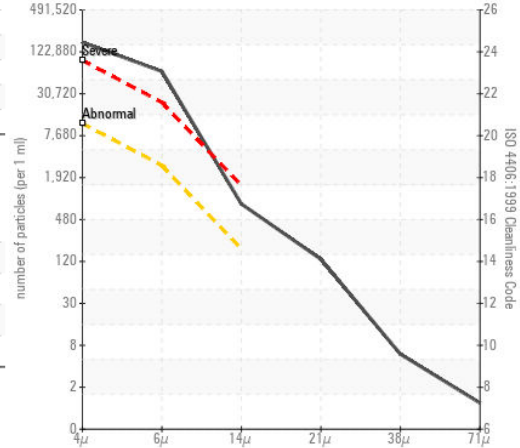

#### Acid Number

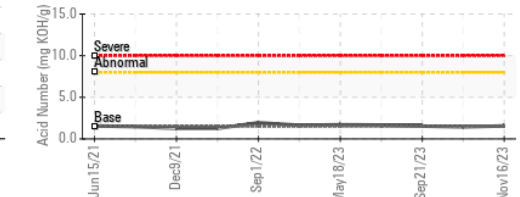

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0003443 **Received** : 21 Nov 2023  
**Lab Number** : 06014517 **Diagnosed** : 24 Nov 2023  
**Unique Number** : 10753661 **Diagnostician** : Don Baldrige

**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONSTELLIUM**  
 4805 SECOND STREET  
 MUSCLE SHOALS, AL  
 US 35661

Contact: Joel Even  
 joel.even@constellium.com

T: (256)740-7490

F: