




OIL ANALYSIS REPORT

Sample Rating Trend

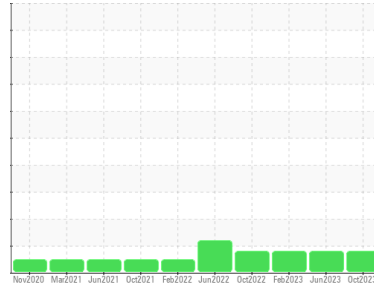

ISO



Area
DICK LAVY
Machine Id
DICK LAVY 4824
Component
Rear Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853971	WC0828756	WC0797164
Sample Date	Client Info		23 Oct 2023	12 Jun 2023	14 Feb 2023
Machine Age	mls	Client Info	448291	390395	337921
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ATTENTION	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	129	114	117
Chromium	ppm	ASTM D5185m >10	1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	2	1	2
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	331	312	292
Barium	ppm	ASTM D5185m 200	0	0	0
Molybdenum	ppm	ASTM D5185m 12	<1	0	<1
Manganese	ppm	ASTM D5185m	7	7	7
Magnesium	ppm	ASTM D5185m 12	3	2	3
Calcium	ppm	ASTM D5185m 150	7	4	7
Phosphorus	ppm	ASTM D5185m 1650	1429	1355	1349
Zinc	ppm	ASTM D5185m 125	6	4	12
Sulfur	ppm	ASTM D5185m 22500	21431	25056	25335

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	39	28	29
Sodium	ppm	ASTM D5185m	3	3	4
Potassium	ppm	ASTM D5185m >20	3	3	<1
Water	%	ASTM D6304 >.2	0.022	0.026	0.040
ppm Water	ppm	ASTM D6304 >2000	227	269.0	406.3

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 34602	▲ 49962	▲ 43079
Particles >6µm	ASTM D7647	>5000	1005	2393	1657
Particles >14µm	ASTM D7647	>640	8	19	21
Particles >21µm	ASTM D7647	>160	3	6	6
Particles >38µm	ASTM D7647	>40	0	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 22/17/10	▲ 23/18/11	▲ 23/18/12


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	1.87	2.17	2.02




OIL ANALYSIS REPORT


Particle Trend

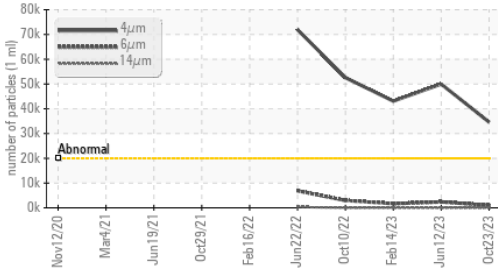


Water (KF)

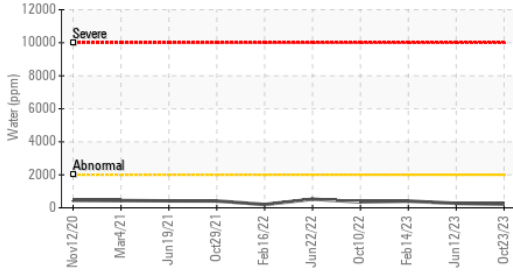


Viscosity @ 100°C

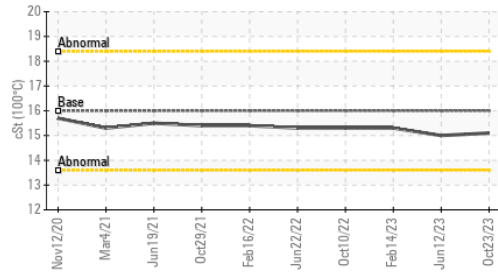

Water (KF)

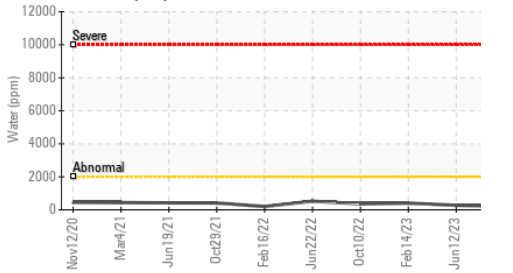


Viscosity @ 100°C

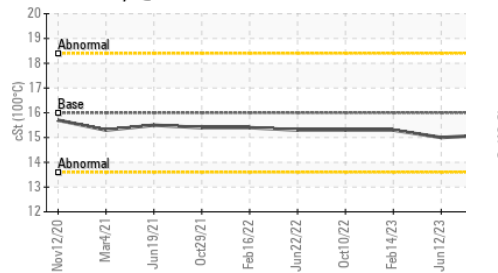

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	110	112
Visc @ 100°C	cSt	ASTM D445	16.0	15.0	15.3
Viscosity Index (VI)	Scale	ASTM D2270	157	141	143

SAMPLE IMAGES

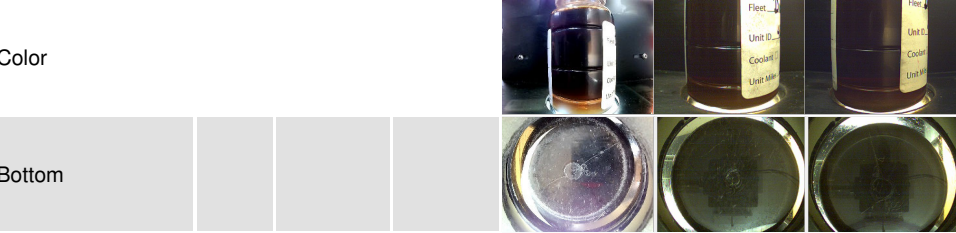


GRAPHS


Ferrous Alloys

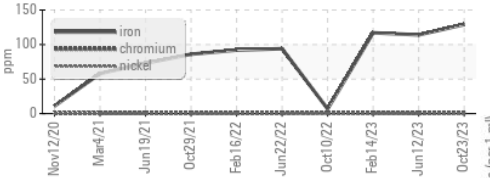


Non-ferrous Metals

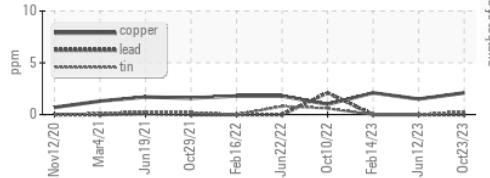


Viscosity @ 40°C

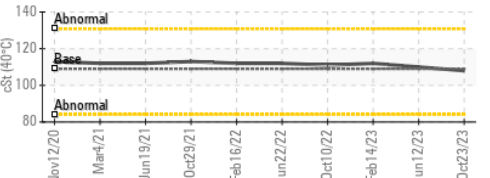

Particle Count

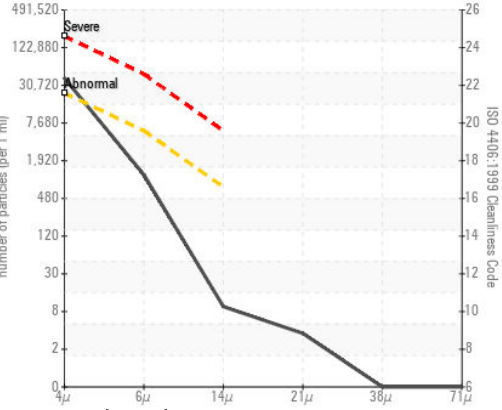

Acid Number

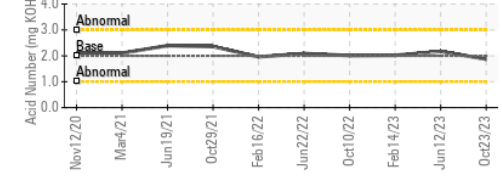

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0853971 **Received** : 21 Nov 2023
Lab Number : 06014525 **Diagnosed** : 24 Nov 2023
Unique Number : 10753669 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: