




OIL ANALYSIS REPORT

Sample Rating Trend

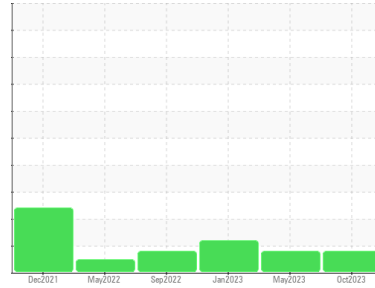

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4851

Component
Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0853965	WC0815576	WC0771168
Sample Date	Client Info	20 Oct 2023	17 May 2023	16 Jan 2023
Machine Age	mls	256690	190226	139793
Oil Age	mls	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >500	214	171	163
Chromium	ppm	ASTM D5185m >10	2	1	1
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	<1	1
Lead	ppm	ASTM D5185m >25	0	0	<1
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 400	170	136	156
Barium	ppm	ASTM D5185m 200	0	0	1
Molybdenum	ppm	ASTM D5185m 12	1	<1	<1
Manganese	ppm	ASTM D5185m	18	15	14
Magnesium	ppm	ASTM D5185m 12	8	8	7
Calcium	ppm	ASTM D5185m 150	23	24	23
Phosphorus	ppm	ASTM D5185m 1650	1075	1113	977
Zinc	ppm	ASTM D5185m 125	19	24	27
Sulfur	ppm	ASTM D5185m 22500	27630	29466	26013

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >75	39	23	24
Sodium	ppm	ASTM D5185m	4	4	5
Potassium	ppm	ASTM D5185m >20	4	3	2
Water	%	ASTM D6304 >.2	0.027	0.025	0.030
ppm Water	ppm	ASTM D6304 >2000	273	257.8	301.3

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 77006	▲ 53132	▲ 77003
Particles >6µm	ASTM D7647 >5000	4605	1919	▲ 5070
Particles >14µm	ASTM D7647 >640	20	18	44
Particles >21µm	ASTM D7647 >160	3	4	9
Particles >38µm	ASTM D7647 >40	0	0	4
Particles >71µm	ASTM D7647 >10	0	0	3
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 23/19/11	▲ 23/18/11	▲ 23/20/13

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.51	2.69	2.77




OIL ANALYSIS REPORT

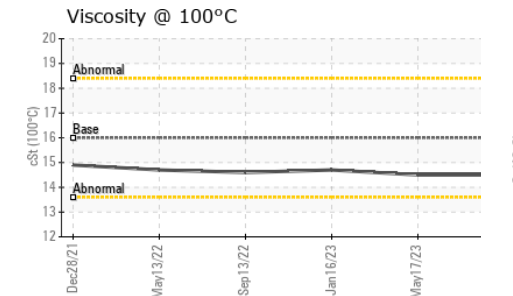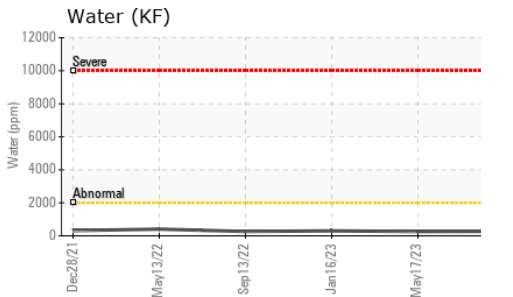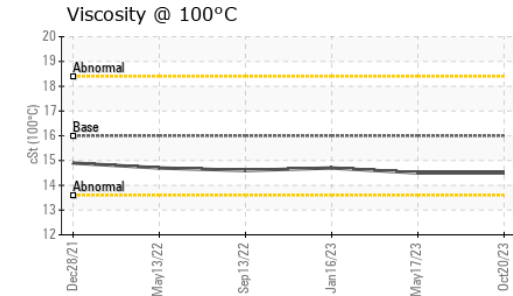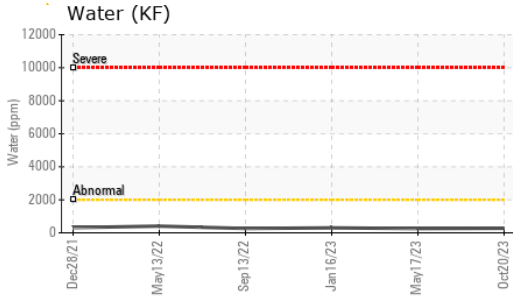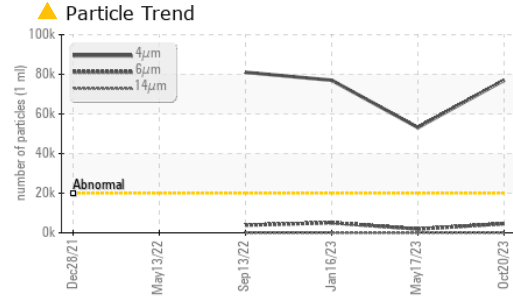






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	96.3	96.6
Visc @ 100°C	cSt	ASTM D445	16.0	14.5	14.7
Viscosity Index (VI)	Scale	ASTM D2270	157	156	158

SAMPLE IMAGES

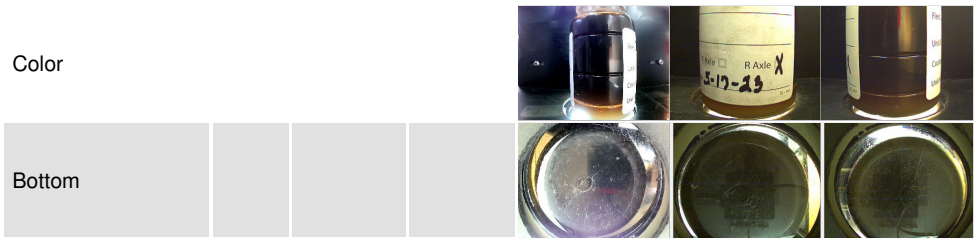

GRAPHS

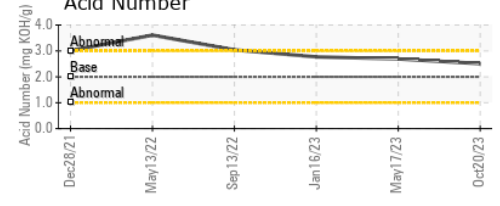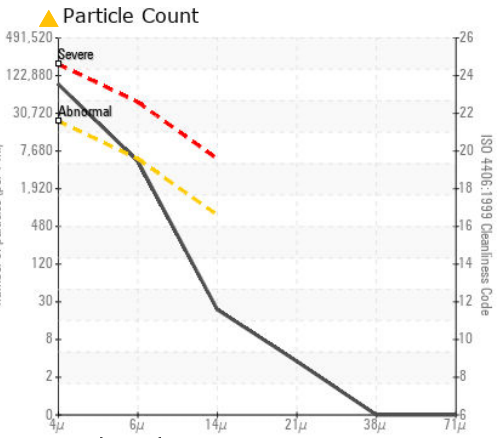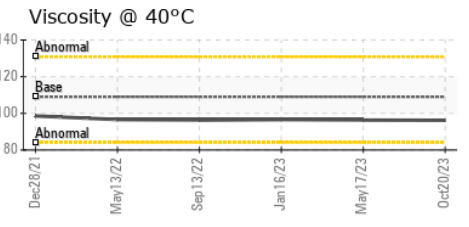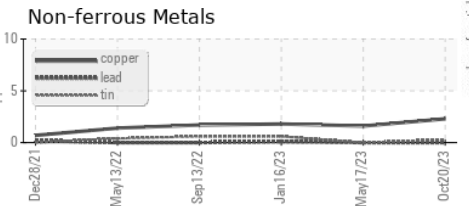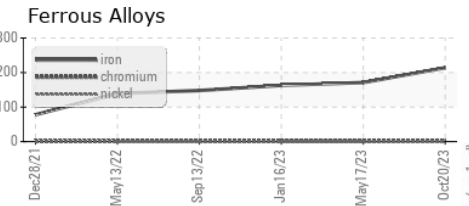

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0853965 **Received** : 21 Nov 2023
Lab Number : 06014529 **Diagnosed** : 24 Nov 2023
Unique Number : 10753673 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)