

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Nov/1021



Component Hydraulic System Fluid NOT GIVEN (--- GAL)

BLOW MOLD

**2 GAL BLOW MOLD** 

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003578		
Sample Date		Client Info		20 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	8		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead		ASTM D5185m	>20	0		
	ppm			10		
Copper Tin	ppm	ASTM D5185m	>20 >20	-		
	ppm		>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		103		
Phosphorus	ppm	ASTM D5185m		450		
Zinc	ppm	ASTM D5185m		583		
Sulfur	ppm	ASTM D5185m		6752		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.05	0.016		
ppm Water	ppm	ASTM D6304	>500	162		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2179		
Particles >6µm		ASTM D7647	>5000	428		
Particles >14µm		ASTM D7647	>640	22		
Particles >21µm		ASTM D7647	>160	5		
Particles >38µm		ASTM D7647	>40	0		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>/19/16	18/16/12		
FLUID DEGRADA	TIO <u>N</u>	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.69		
		. 10 111 20040		0.00		


Contact/Location: Jason Stanley - JACHUT Page 1 of 2




# **OIL ANALYSIS REPORT**





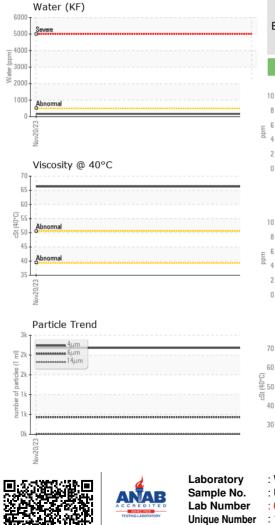

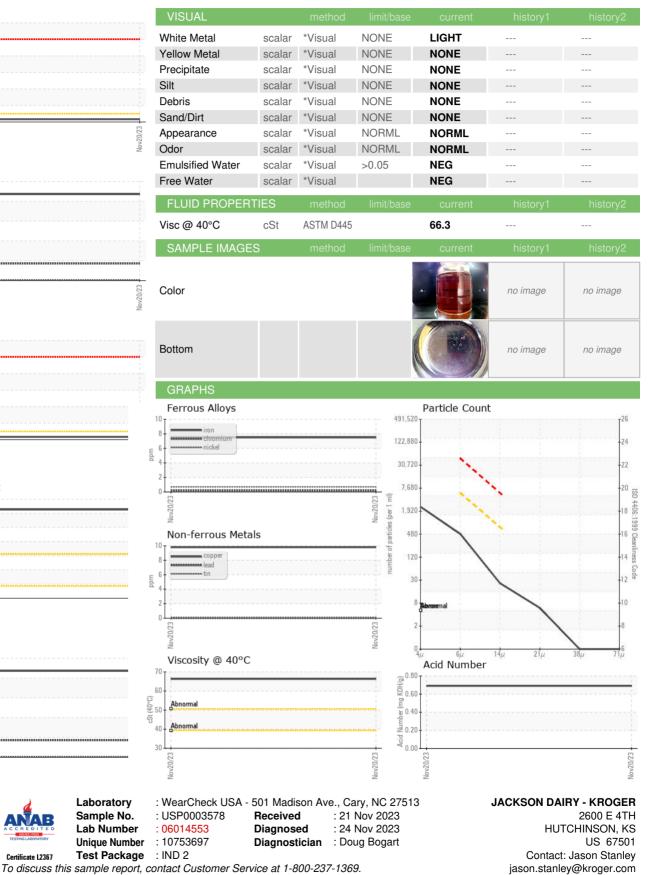

Report Id: JACHUT [WUSCAR] 06014553 (Generated: 11/24/2023 09:24:58) Rev: 1

Certificate L2367

Test Package

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Jason Stanley - JACHUT

T: (620)694-6922

F: (620)663-5135