


Fluid SCHAEFFER 209 MOLY UNIVERSAL GEARLUBE ISO 220 (--- GAL)

Machine Id 015-0073

Hoisting Gearbox

Component

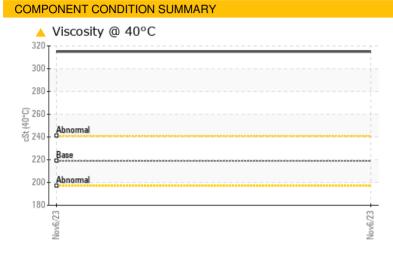

RECOMMENDATION	PROBLEMATIC TEST RESULTS						
Resample at the next service interval to monitor.	Sample Status				ATTENTION		
	Visc @ 40°C	cSt	ASTM D445	219	A 315		

Customer Id: AECCHATN Sample No.: WC0868362 Lab Number: 06014663 Test Package: CONST

To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

015-0073 Component

Hoisting Gearbox

SCHAEFFER 209 MOLY UNIVERSAL GEARLUBE ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

Viscosity of sample indicates oil is within ISO 320 range, advise investigate. Confirm oil type. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0868362		
Sample Date		Client Info		06 Nov 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	9		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m		2		
Lead	ppm	ASTM D5185m		<1		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m		0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	65	0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m	325	3		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m	875	452		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	16000	704		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		2		
Sodium	ppm					
	ppin	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m ASTM D5185m	>20	0 1		
Potassium VISUAL			>20 limit/base	-	 history1	 history2
		ASTM D5185m		1		
VISUAL	ppm scalar scalar	ASTM D5185m method	limit/base	1 current	history1	history2
VISUAL White Metal Yellow Metal	ppm scalar	ASTM D5185m method *Visual	limit/base NONE	1 current NONE	history1	history2
VISUAL White Metal Yellow Metal Precipitate	ppm scalar scalar	ASTM D5185m method *Visual *Visual	limit/base NONE NONE	1 current NONE NONE	history1 	history2
VISUAL White Metal	ppm scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual	limit/base NONE NONE NONE	1 current NONE NONE NONE	history1 	history2
VISUAL White Metal Yellow Metal Precipitate Silt Debris	ppm scalar scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual *Visual	limit/base NONE NONE NONE NONE	1 current NONE NONE NONE NONE	history1 	history2
VISUAL White Metal Yellow Metal Precipitate Silt	ppm scalar scalar scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual *Visual *Visual	limit/base NONE NONE NONE NONE	1 Current NONE NONE NONE NONE NONE	history1	history2
VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm scalar scalar scalar scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual *Visual *Visual *Visual	limit/base NONE NONE NONE NONE NONE	1 Current NONE NONE NONE NONE NONE	history1	history2
VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual *Visual *Visual *Visual *Visual	limit/base NONE NONE NONE NONE NONE NONE NORML	1 Current NONE NONE NONE NONE NONE NONE NORML	history1	history2
VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance Odor	ppm scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m method *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual	limit/base NONE NONE NONE NONE NONE NONE NORML NORML	1 Current NONE NONE NONE NONE NONE NORML NORML	history1	history2



OIL ANALYSIS REPORT



FLUID PROPERT	TES me	ethod	limit/base	current	history1	history2
Visc @ 40°C	cSt AST	M D445	219	A 315		
SAMPLE IMAGES	S me	ethod	limit/base	current	history1	history2
Color				no image	no image	no image
Bottom				no image	no image	no image
GRAPHS						
Ferrous Alloys			Nov6/23			
: 06014663	Received Diagnosed Diagnostician	: 21 : 24 : Dor	Nov 2023 Nov 2023 Baldridge	3	CHAT	LHEAD DRIN TANOOGA, T US 374 ⁻ NIEL LISELL

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: