

## **OIL ANALYSIS REPORT**

### OKLAHOMA/102/EG - OTHER SERVICE 54.16L [OKLAHOMA^102^EG - OTHER SERVICE] Component

**Hydraulic System** 

MOBIL MOBILFLUID 424 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 8544 hrs )

#### Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

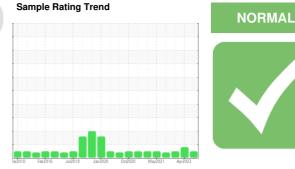



		lar2010 Fe	b2016 Jul2019 Ja	n2020 0ct2020 May2021	Apr2023	
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0819897	WC0746784	WC0678772
Sample Date		Client Info		09 Nov 2023	03 Apr 2023	24 Jun 2022
Machine Age	hrs	Client Info		8474	8279	8079
Oil Age	hrs	Client Info		4339	4339	4610
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	ATTENTION	NORMAL
CONTAMINATION	I	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4	5	5
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	<1	2
Lead	ppm	ASTM D5185m	>10	1	1	2
Copper	ppm	ASTM D5185m	>75	6	5	5
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		68	58	68
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		15	13	18
Calcium	ppm	ASTM D5185m		3233	3070	3230
Phosphorus	ppm	ASTM D5185m		1115	1021	976
Zinc	ppm	ASTM D5185m		1325	1257	1203
Sulfur	ppm	ASTM D5185m		5024	5787	5883
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	6	6
Sodium	ppm	ASTM D5185m		<1	1	2
Potassium	ppm	ASTM D5185m	>20	2	1	0
FLUID CLEANLINI	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		12944	15358	29878
Particles >6µm		ASTM D7647	>2500	1584	<b>A</b> 2817	1457
Particles >14µm		ASTM D7647	>640	75	183	59
Deutieles Ofwar			100	45	4.0	10

ASTM D7647 >160

ASTM D7647 >40

ASTM D7647 >10

ISO 4406 (c) >--/18/16

15

0

0

21/18/13

Particles >21µm

Particles >38µm

Particles >71µm

**Oil Cleanliness** 

10

0

0

22/18/13

46


3


0


▲ 21/19/15



## **OIL ANALYSIS REPORT**

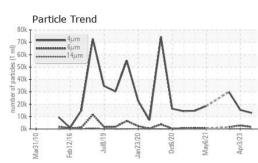

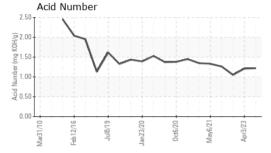


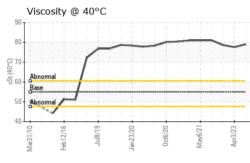


FLUID DEGRADA	TION	method			history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.22	1.21	1.05
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55	79.0	77.6	78.6
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color

Bottom



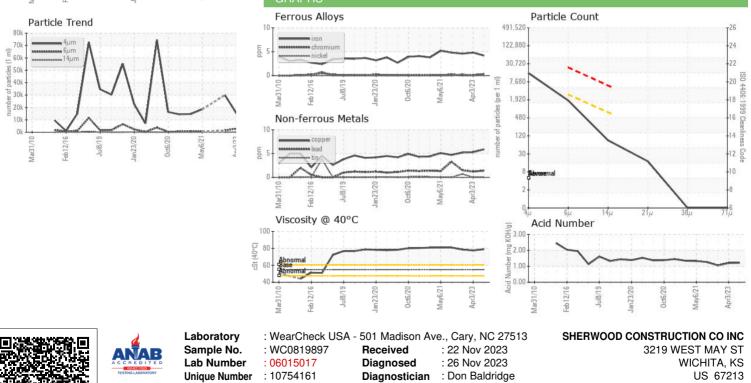

# Centificate 12367 Test Package : CONST To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: LOUIS BRESHEARS

Page 2 of 2

F: x:

Contact: DOUG KING

T: (316)617-3161

doug.king@sherwood.net