




OIL ANALYSIS REPORT

Sample Rating Trend

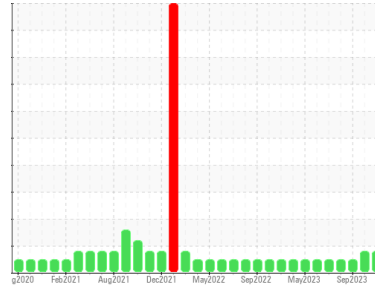

Machine Id
HUSKY 4

Component
Hydraulic System

Fluid
FIRE-RESISTANT FLUID ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PTK0004757	PTK0004820	PTK0004762
Sample Date	Client Info	21 Nov 2023	05 Oct 2023	04 Sep 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ATTENTION	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	▲ 28	1	20
Chromium ppm	ASTM D5185m >20	2	1	2
Nickel ppm	ASTM D5185m >20	<1	0	<1
Titanium ppm	ASTM D5185m	<1	0	0
Silver ppm	ASTM D5185m	0	0	0
Aluminum ppm	ASTM D5185m >20	2	0	0
Lead ppm	ASTM D5185m >20	0	0	<1
Copper ppm	ASTM D5185m >20	<1	1	<1
Tin ppm	ASTM D5185m >20	0	0	0
Vanadium ppm	ASTM D5185m	0	<1	0
Cadmium ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 5	0	0	0
Barium ppm	ASTM D5185m 5	0	0	0
Molybdenum ppm	ASTM D5185m 5	<1	0	0
Manganese ppm	ASTM D5185m	<1	0	<1
Magnesium ppm	ASTM D5185m 5	<1	<1	0
Calcium ppm	ASTM D5185m 50	4	4	4
Phosphorus ppm	ASTM D5185m 175	66	135	55
Zinc ppm	ASTM D5185m 62	19	38	0
Sulfur ppm	ASTM D5185m 500	0	384	52

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	4	1	2
Sodium ppm	ASTM D5185m	2	1	3
Potassium ppm	ASTM D5185m >20	1	<1	<1
Water %	ASTM D6304 >55	NEG	NEG	NEG






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	338	17077	312
Particles >6µm	ASTM D7647 >2500	73	▲ 2778	83
Particles >14µm	ASTM D7647 >320	7	289	9
Particles >21µm	ASTM D7647 >80	2	92	3
Particles >38µm	ASTM D7647 >20	0	6	0
Particles >71µm	ASTM D7647 >4	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/18/15	16/13/10	▲ 21/19/15	15/14/10

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 3.63	0.35	0.632	0.39


OIL ANALYSIS REPORT

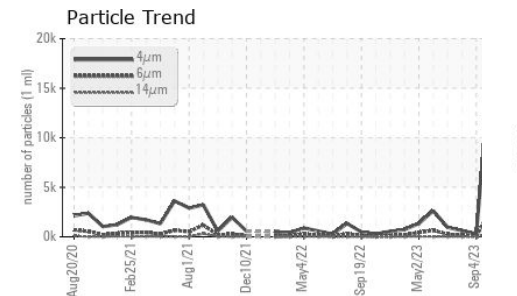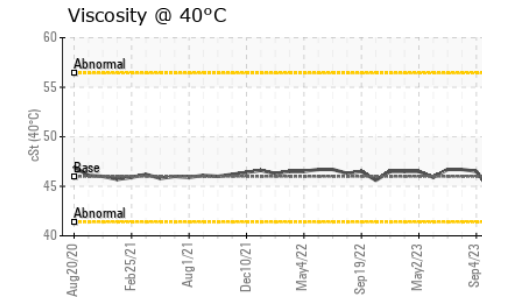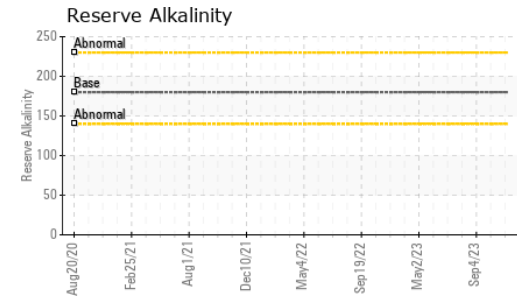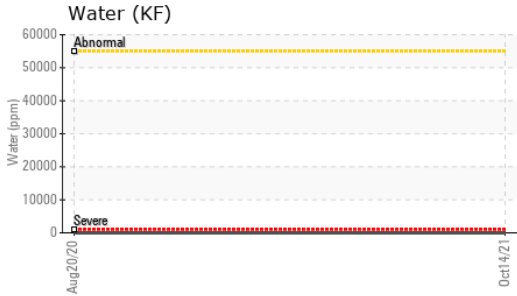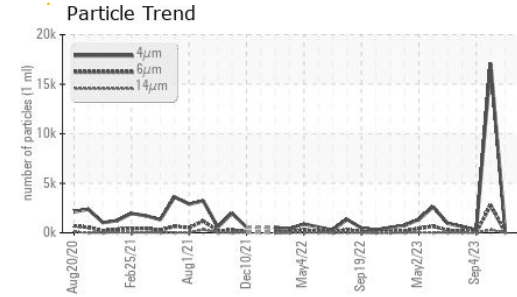






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.1	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

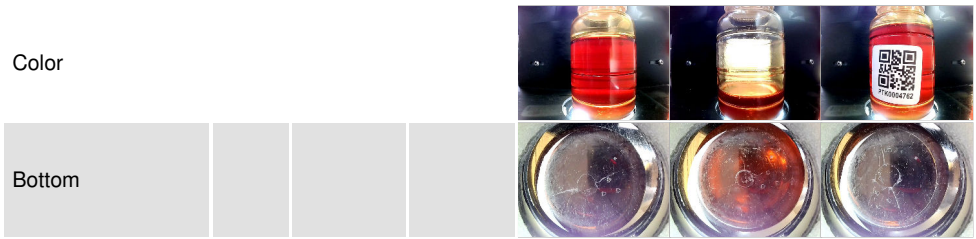

GRAPHS

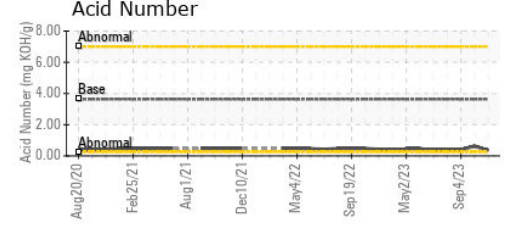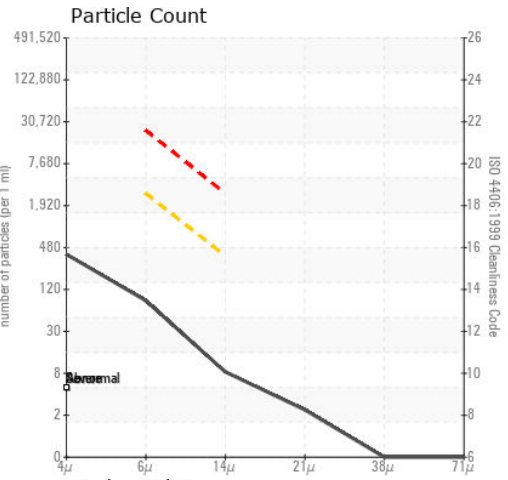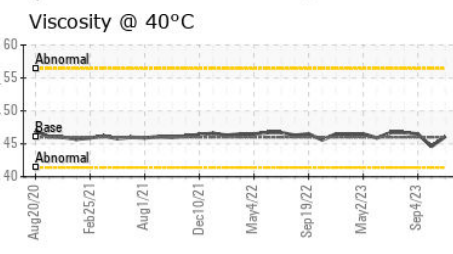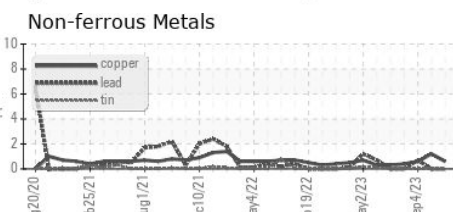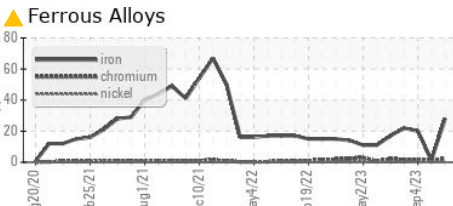

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0004757
Lab Number : 06015022
Unique Number : 10754166
Test Package : MOB 2 (Additional Tests: KF, pH, ReserveAlk)

NIAGARA WATER BOTTLING - MISSOURI CITY
 14810 FAIRWAY PINES DR
 MISSOURI CITY, TX
 US 77489

Received : 22 Nov 2023
Diagnosed : 26 Nov 2023
Diagnostician : Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MIKE CONLEE
 mconlee@niagarawater.com
 T:
 F: