




# OIL ANALYSIS REPORT

Sample Rating Trend

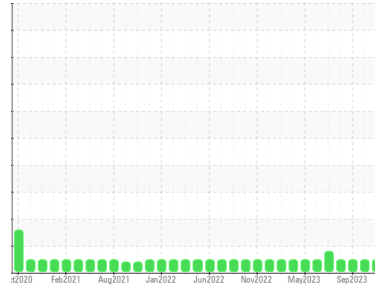

**NORMAL**



Machine Id  
**HUSKY 1**

Component  
**Hydraulic System**

Fluid  
**FIRE-RESISTANT FLUID ISO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PTK0004754</b>	PTK0004822	PTK0004761
Sample Date	Client Info			<b>21 Nov 2023</b>	05 Oct 2023	04 Sep 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>7</b>	13	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	2
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	5	<b>&lt;1</b>	12	0
Calcium	ppm	ASTM D5185m	50	<b>3</b>	71	2
Phosphorus	ppm	ASTM D5185m	175	<b>129</b>	403	122
Zinc	ppm	ASTM D5185m	62	<b>20</b>	83	0
Sulfur	ppm	ASTM D5185m	500	<b>0</b>	1355	92

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>4</b>	<1	3
Sodium	ppm	ASTM D5185m		<b>0</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water	%	ASTM D6304	>55	<b>NEG</b>	NEG	NEG

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>3923</b>	534	209
Particles >6µm		ASTM D7647	>2500	<b>466</b>	152	44
Particles >14µm		ASTM D7647	>320	<b>19</b>	21	8
Particles >21µm		ASTM D7647	>80	<b>5</b>	8	4
Particles >38µm		ASTM D7647	>20	<b>0</b>	1	0
Particles >71µm		ASTM D7647	>4	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/18/15	<b>19/16/11</b>	16/14/12	15/13/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	3.63	<b>0.49</b>	0.33	0.50


# OIL ANALYSIS REPORT

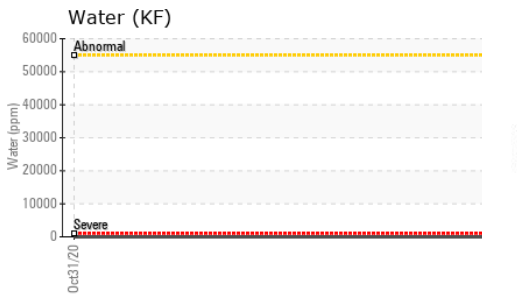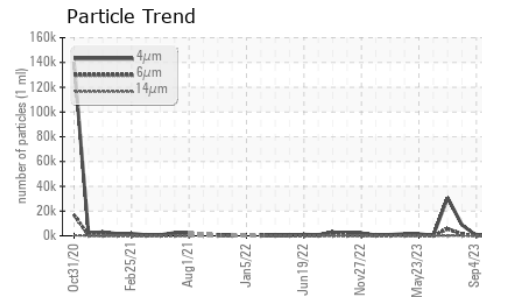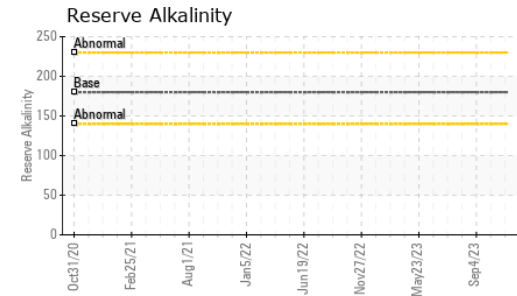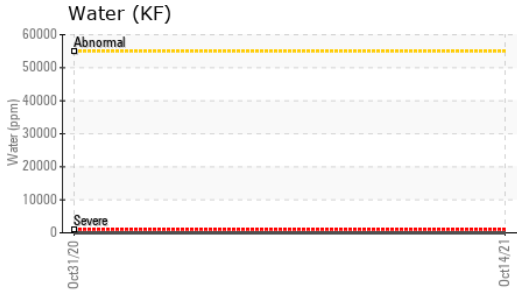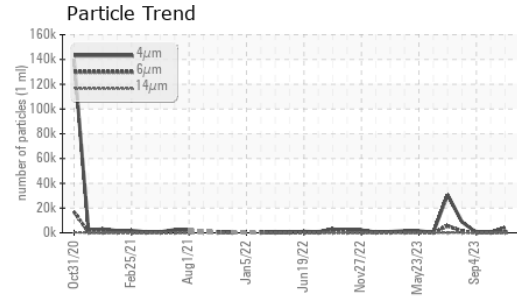






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.1	42.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

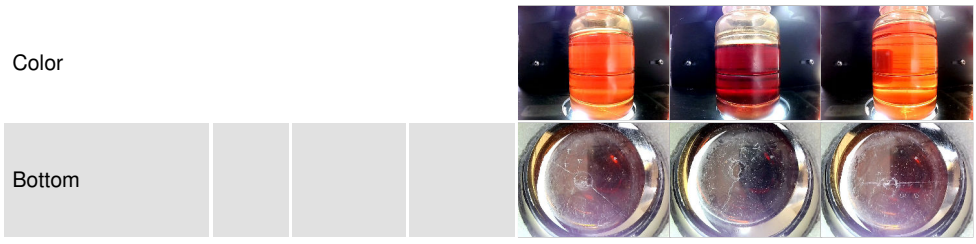

## GRAPHS

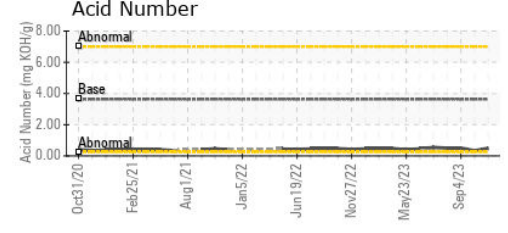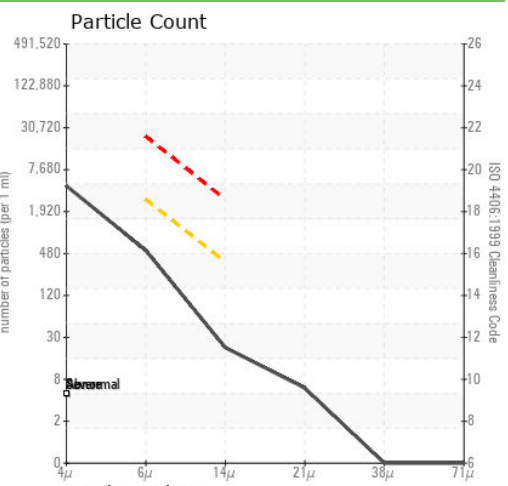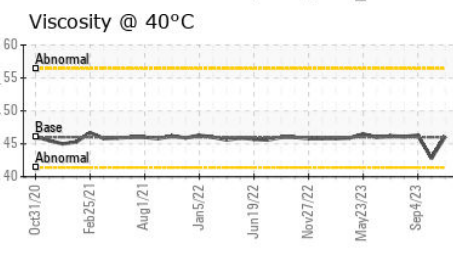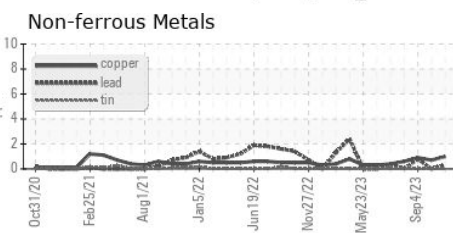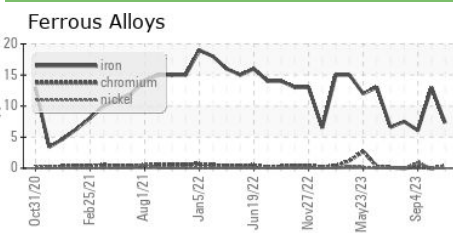

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PTK0004754 **Received** : 22 Nov 2023  
**Lab Number** : 06015024 **Diagnosed** : 26 Nov 2023  
**Unique Number** : 10754168 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: KF, pH, ReserveAlk )

**NIAGARA WATER BOTTLING - MISSOURI CITY**  
 14810 FAIRWAY PINES DR  
 MISSOURI CITY, TX  
 US 77489  
 Contact: MIKE CONLEE  
 mconlee@niagarawater.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)