


Sample Rating Trend





SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI026272	MHI025364	MHI017692
Sample Date		Client Info		10 Nov 2023	27 Oct 2022	27 Oct 202
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		92644	88405	82732
Oil Age Oil Changed	1115	Client Info		Not Changd	Not Changd	Not Change
Sample Status		Cilent Inio		NORMAL	NORMAL	NORMAL
-				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	12	10	6
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	8	9	5
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	0
Lead	ppm	ASTM D5185m	>20	1	1	0
Copper	ppm	ASTM D5185m	>20	<1	<1	0
Tin	ppm	ASTM D5185m	>20	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	2	0
Calcium	ppm	ASTM D5185m	120	116	110	103
Phosphorus	ppm	ASTM D5185m	475	489	439	412
Zinc	ppm	ASTM D5185m	475	19	31	22
Sulfur		ASTM D5185m	1275	1665	2048	1308
	ppm		-			
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	<1	<1	0
Sodium	ppm	ASTM D5185m		<1	3	2
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water	%	ASTM D6304	>0.1	0.007	0.007	0.003
ppm Water	ppm	ASTM D6304	>1000	70	75.0	29.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1036	1432	4272
Particles >6µm		ASTM D7647	>1300	281	277	1042
Particles >14µm		ASTM D7647	>160	23	23	53
Particles >21µm		ASTM D7647	>40	6	10	9
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	18/15/12	19/17/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.05	0.09	0.087
	my nony	A0 I WI D0040			0.09	

Machine Id Component **Hydraulic System** MOBIL DTE 10 EXCEL 32 (43 GAL)

DIAMOND WTG

ENGINEERING & SERVICES, INC. any of 🙏 MITSU

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Report Id: DIADIL [WUSCAR] 06015064 (Generated: 11/26/2023 09:20:50) Rev: 1


0.09 Contact/Location: DANIEL BOYD - DIADIL


Page 1 of 2



OIL ANALYSIS REPORT

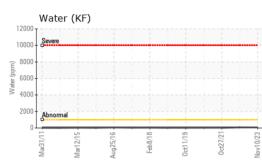


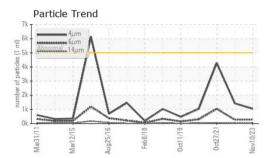

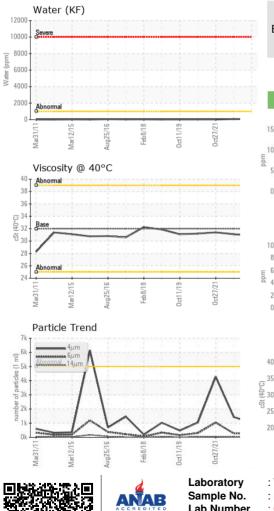

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	30.9	31.1	31.4
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color				a.		

Bottom

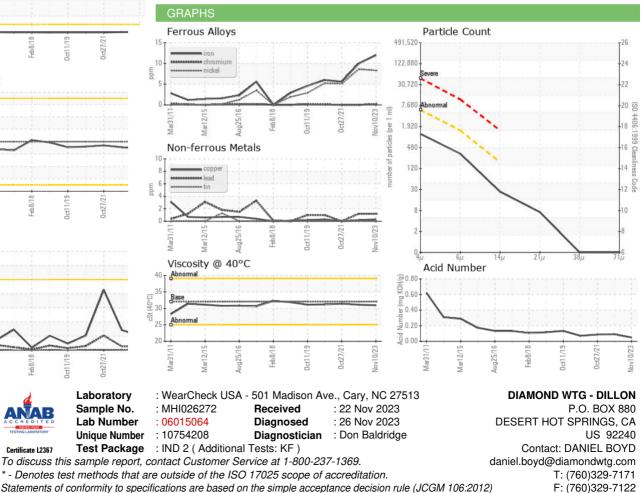

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DANIEL BOYD - DIADIL