

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 6985515 (S/N 2151) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Sep 2021	Jan2022 Jul2022	Oct2022 Feb2023 Jul2023	Nov2023	
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC124390	KC100510	KC108125
Sample Date		Client Info		13 Nov 2023	11 Jul 2023	03 Feb 2023
Machine Age	hrs	Client Info		13785	11649	9129
Oil Age	hrs	Client Info		0	2500	3000
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	1	1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	12	7	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	6	59
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		0	0	2
Zinc	ppm	ASTM D5185m		0	8	10
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		0	0	19
Potassium	ppm	ASTM D5185m	>20	<1	2	6
Water	%	ASTM D6304	>0.05	0.011	0.007	0.015
ppm Water	ppm	ASTM D6304	>500	111	76.6	157.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1398	23094	3679
Particles >6µm		ASTM D7647	>1300	481	4 751	584
Particles >14µm		ASTM D7647	>80	68	A 312	26
Particles >21µm		ASTM D7647	>20	31	9 7	5
Particles >38µm		ASTM D7647	>4	3	4	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13	A 22/19/15	19/16/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.39	0.45	0.38
(39					*




OIL ANALYSIS REPORT

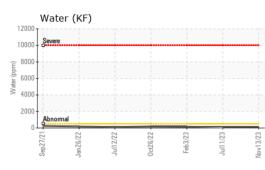

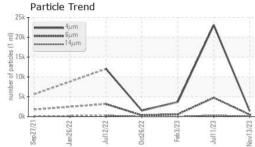


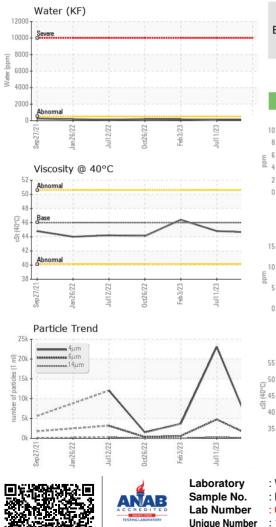

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	🔺 MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	44.8	46.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						



Bottom

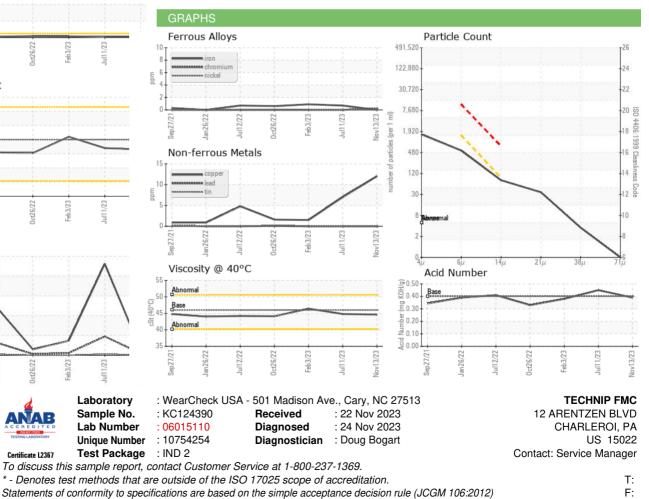

Contact/Location: Service Manager - TECCHA