

OIL ANALYSIS REPORT

Sample Rating Trend



AIR 1 (S/N 003-67274)

Air Compressor Fluid USPI AIR 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	_	_			


SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info		USPM31341	USPM27178	USPM26446
Sample Date		Client Info		18 Nov 2023	20 Jun 2023	22 Feb 2023
Machine Age	hrs	Client Info		92387	91000	88350
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>4	<1	0	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	1	<1	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>40	1	<1	<1
Tin	ppm	ASTM D5185m	>5	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	2
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	0	0	0	<1
Calcium	ppm	ASTM D5185m	0	<1	0	<1
Phosphorus	ppm	ASTM D5185m	1	51	49	57
Zinc	ppm	ASTM D5185m	0	0	0	<1
Sulfur	ppm	ASTM D5185m	0	0	13	29
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.2	0.065	0.112	0.060
ppm Water	ppm	ASTM D6304	>2000	656	1124.3	608.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4972	306	662
Particles >6µm		ASTM D7647	>2500	1527	110	186
Particles >14µm		ASTM D7647	>320	80	16	21
Particles >21µm		ASTM D7647	>80	14	6	6
Particles >38µm		ASTM D7647	>20	1	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/18/13	15/14/11	17/15/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.52	0.53	0.28





Water (KF)

2500

OIL ANALYSIS REPORT





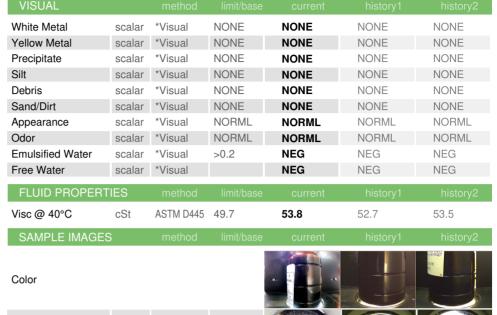

Bottom

