

OIL ANALYSIS REPORT

Sample Rating Trend



AIR 3 (S/N 003-76006) Component

Air Compressor Fluic USPI AIR 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Mar2020 Ap	2020 Dec2020 Apr2021	Aug ² 021 Jan ² 022 Feb ² 023 Jul ² 0	23 Nov2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM31340	USPM27181	USPM26449
Sample Date		Client Info		18 Nov 2023	09 Jul 2023	22 Feb 2023
Machine Age	hrs	Client Info		28684	27328	26364
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>4	<1	0	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	1	<1	0
_ead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>40	<1	<1	0
Tin	ppm	ASTM D5185m	>5	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Vanganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	0	<1	0	0
Calcium	ppm	ASTM D5185m	0	<1	0	0
Phosphorus	ppm	ASTM D5185m	1	0	3	5
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water	%	ASTM D6304	>0.2	0.061	0.117	0.062
opm Water	ppm	ASTM D6304	>2000	617	1174.2	623.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	707	2417	1615
Particles >6µm		ASTM D7647	>2500	208	737	409
Particles >14µm		ASTM D7647	>320	19	59	27
Particles >21µm		ASTM D7647	>80	5	14	9
Particles >38µm		ASTM D7647	>20	0	1	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11	18/17/13	18/16/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.25	0.19	0.14
12:06) Rev: 1 Contact/Location: ? ? - SMISM						??-SMISMINI

Report Id: SMISMINP [WUSCAR] 06015134 (Generated: 11/24/2023 22:12:06) Rev: 1





Water (KF)


2500

200


OIL ANALYSIS REPORT

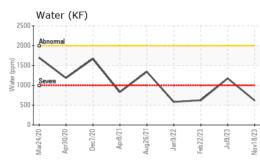

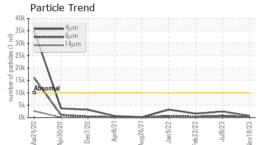

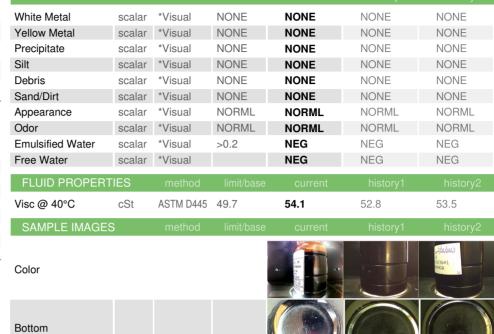



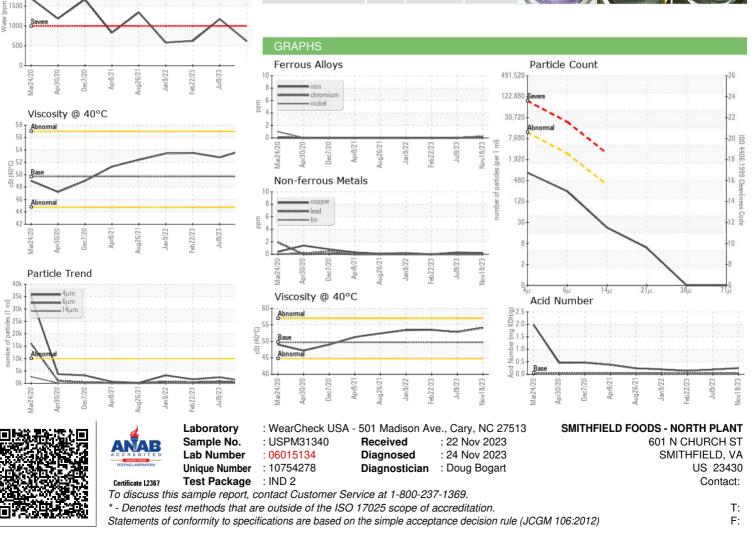

Contact/Location: ? ? - SMISMINP