




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

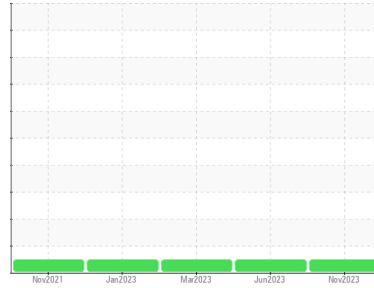

Area  
**DIGGER DERRICK**  
 Machine Id  
**FREIGHTLINER V334**  
 Component  
**Diesel Engine**  
 Fluid  
**HIGH PERFORMANCE LUBRICANTS HDMO 15W40 (17 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>HPL0002295</b>	HPL0001778	HPL0000643
Sample Date	Client Info		<b>17 Nov 2023</b>	09 Jun 2023	23 Mar 2023
Machine Age	hrs	Client Info	<b>2918</b>	2258	2258
Oil Age	hrs	Client Info	<b>660</b>	230	878
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>39</b>	22	52
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	<1	6
Lead	ppm	ASTM D5185m	>40	<b>1</b>	1	0
Copper	ppm	ASTM D5185m	>330	<b>5</b>	3	11
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	200	<b>145</b>	194	154
Barium	ppm	ASTM D5185m		<b>0</b>	0	4
Molybdenum	ppm	ASTM D5185m	85	<b>651</b>	685	706
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	525	<b>439</b>	488	440
Calcium	ppm	ASTM D5185m	4300	<b>3948</b>	4128	3825
Phosphorus	ppm	ASTM D5185m	1000	<b>800</b>	879	827
Zinc	ppm	ASTM D5185m	1100	<b>1003</b>	1093	1013
Sulfur	ppm	ASTM D5185m	20200	<b>16284</b>	21592	17108

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>15</b>	12	20
Sodium	ppm	ASTM D5185m		<b>3</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	2	5
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.1</b>	9.3	12.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>31.9</b>	28.4	33.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.1</b>	18.6	23.8
Base Number (BN)	mg KOH/g	ASTM D2896	14.5	<b>12.72</b>	17.05	11.53











# OIL ANALYSIS REPORT

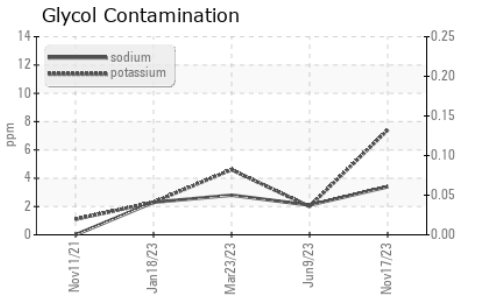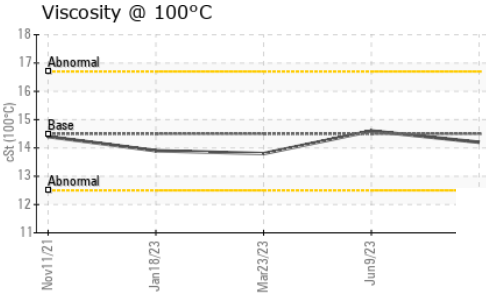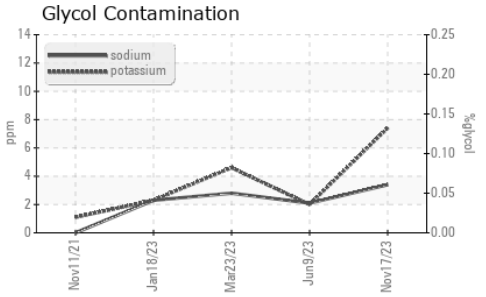

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.5	14.2	14.6

### GRAPHS

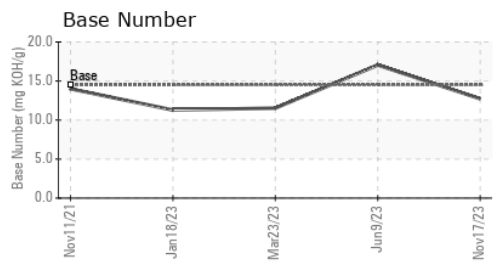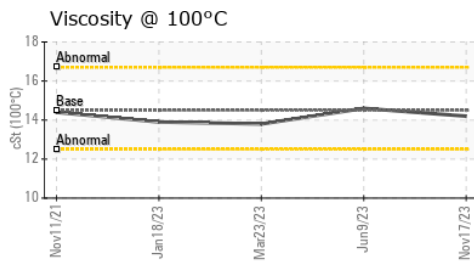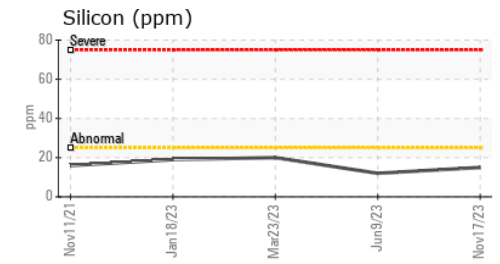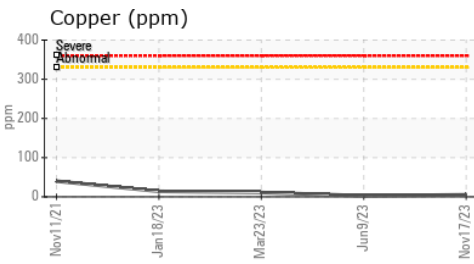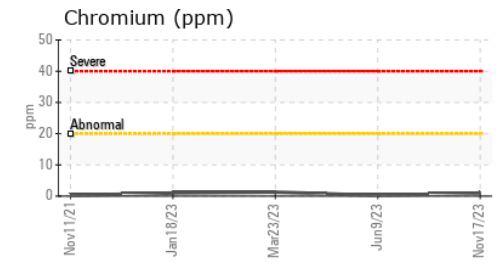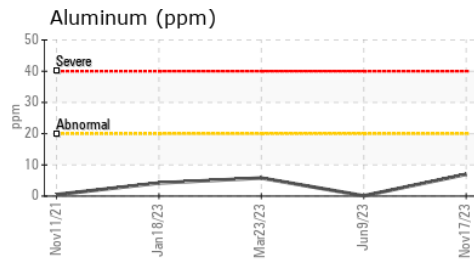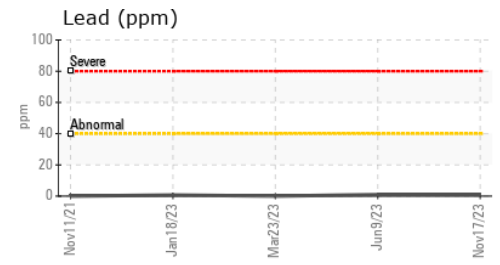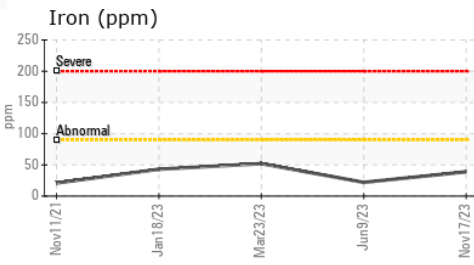

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0002295 **Received** : 22 Nov 2023  
**Lab Number** : 06015297 **Diagnosed** : 30 Nov 2023  
**Unique Number** : 10754441 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: Glycol )

**MUSCATINE POWER AND WATER**  
 3205 CEDAR STREET  
 MUSCATINE, IA  
 US 52761  
 Contact: JUSTIN CONKLIN  
 justin.conklin@mpw.org  
 T: (563)262-3351  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)