



# PROBLEM SUMMARY

Sample Rating Trend


WEAR



Machine Id  
**A-322**


Component  
**Bogie/Center Axle**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

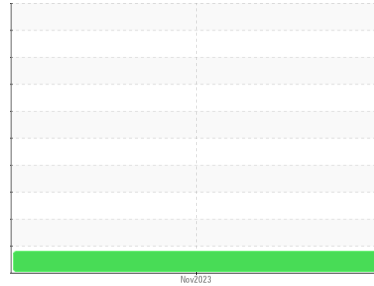

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

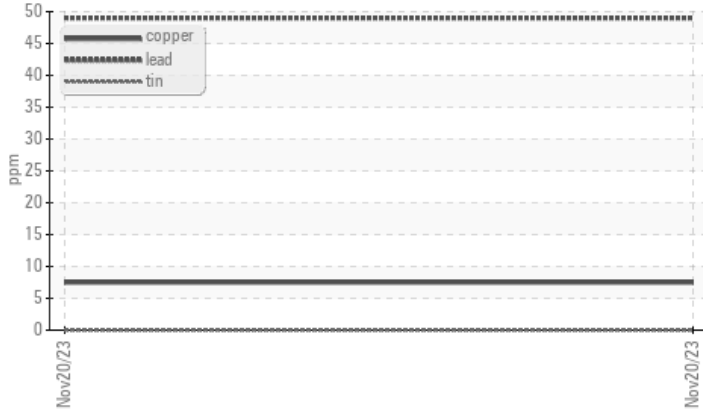

## RECOMMENDATION

No corrective action is recommended at this time.  
Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Lead	ppm	ASTM D5185m	>25	▲ 49	---	---

Customer Id: DUKRAL  
Sample No.: WC0828492  
Lab Number: 06015513  
Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

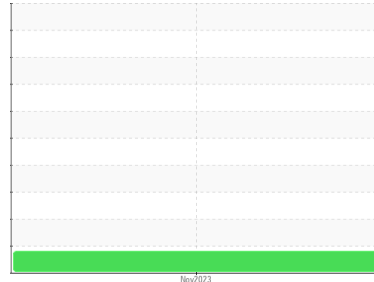

**WEAR**

Machine Id

**A-322**

Component

**Bogie/Center Axle**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The lead level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0828492</b>	---	---
Sample Date	Client Info		<b>20 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>6566</b>	---	---
Oil Age	hrs	Client Info	<b>566</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>88</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	---	---
Lead	ppm	ASTM D5185m >25	<b>▲ 49</b>	---	---
Copper	ppm	ASTM D5185m >50	<b>8</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 6	<b>6</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m 145	<b>106</b>	---	---
Calcium	ppm	ASTM D5185m 3570	<b>3494</b>	---	---
Phosphorus	ppm	ASTM D5185m 1290	<b>1046</b>	---	---
Zinc	ppm	ASTM D5185m 1640	<b>1259</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>3718</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>5</b>	---	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---




# OIL ANALYSIS REPORT

### ▲ Non-ferrous Metals

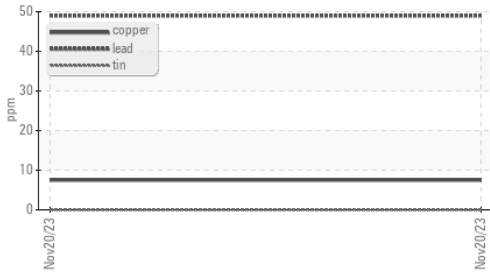

### Viscosity @ 40°C

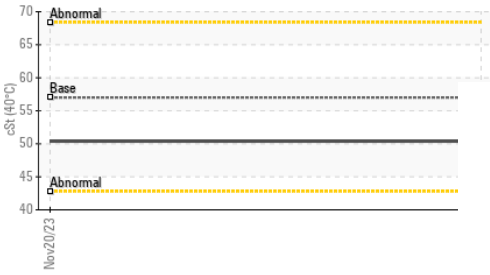

### FLUID PROPERTIES


method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	57.0	<b>50.4</b>	---	---

### SAMPLE IMAGES


method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS


#### Ferrous Alloys

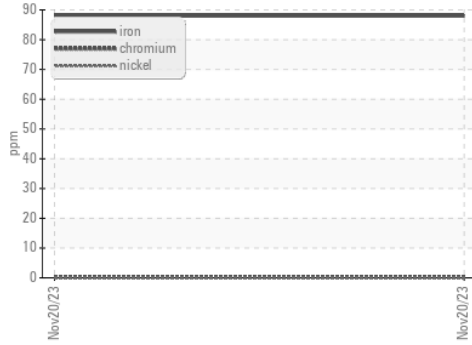

### ▲ Non-ferrous Metals

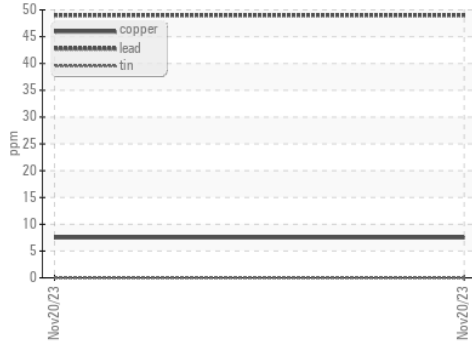

### Viscosity @ 40°C

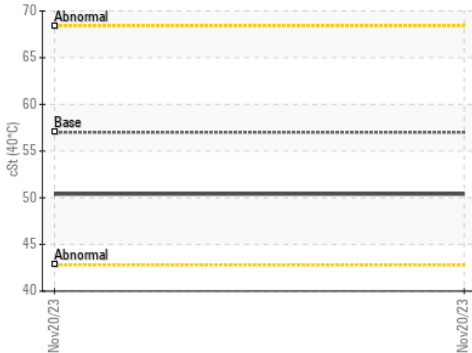

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0828492     **Received** : 22 Nov 2023  
**Lab Number** : **06015513**     **Diagnosed** : 27 Nov 2023  
**Unique Number** : 10754657     **Diagnostician** : Jonathan Hester  
**Test Package** : CONST

**DUKE LAZZARA**  
 4201 FAYETTEVILLE RD  
 RALEIGH, NC  
 US 27603  
 Contact: NICK DIXON  
 NICK.DIXON@DUKELAZZAM.COM  
 T: (919)760-7797  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)