




# PROBLEM SUMMARY



Area  
**COLORADO/443/EG - EXCAVATOR**  
 Machine Id  
**20.407L [COLORADO^443^EG - EXCAVATOR]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

Sample Rating Trend

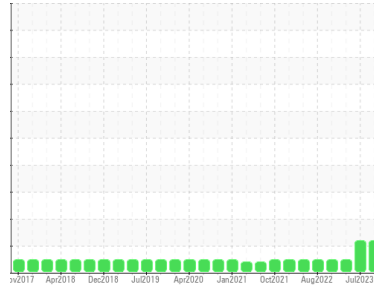


GLYCOL



## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

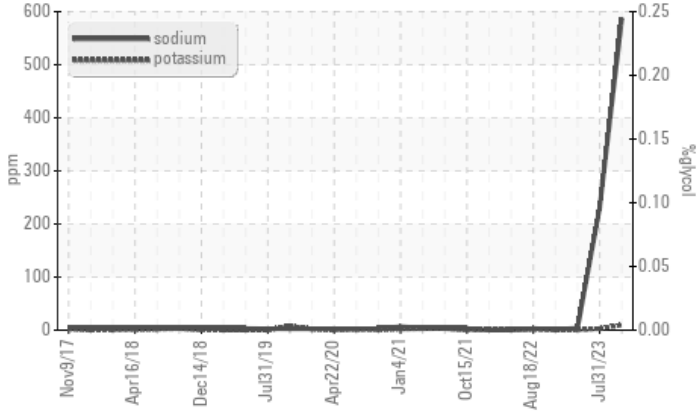

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |             | ABNORMAL | ABNORMAL | NORMAL |
|---------------|-----|-------------|----------|----------|--------|
| Sodium        | ppm | ASTM D5185m | ▲ 587    | ▲ 231    | 4      |

Customer Id: SHEWIC  
 Sample No.: WC0859602  
 Lab Number: 06015617  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action              | Status | Date | Done By | Description   |
|---------------------|--------|------|---------|---|
| Change Fluid        | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Change Filter       | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Resample            | ---    | ---  | ?       | We recommend an early resample to monitor this condition.     |
| Check Glycol Access | ---    | ---  | ?       | We advise that you check for the source of the coolant leak.  |

## HISTORICAL DIAGNOSIS

### 31 Jul 2023 Diag: Jonathan Hester

#### GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



### 01 Mar 2023 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



### 08 Nov 2022 Diag: Wes Davis

#### NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)






# OIL ANALYSIS REPORT



Area  
**COLORADO/443/EG - EXCAVATOR**  
 Machine Id  
**20.407L [COLORADO^443^EG - EXCAVATOR]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

Sample Rating Trend

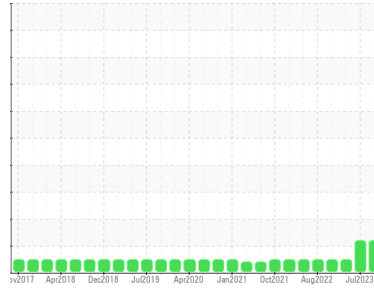

**GLYCOL**



## DIAGNOSIS

### ▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0859602</b>   | WC0799121   | WC0766183   |
| Sample Date   | Client Info |             | <b>20 Nov 2023</b> | 31 Jul 2023 | 01 Mar 2023 |
| Machine Age   | hrs         | Client Info | <b>7850</b>        | 7616        | 7358        |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current        | history1 | history2 |
|-------|-----------|------------|----------------|----------|----------|
| Fuel  | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>25</b>    | 25       | 17       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 1        | <1       |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | <1       |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >25  | <b>12</b>    | 20       | 7        |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >330 | <b>2</b>     | 2        | 1        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0 | <b>32</b>    | 44       | 48       |
| Barium     | ppm    | ASTM D5185m 0 | <b>0</b>     | 0        | 2        |
| Molybdenum | ppm    | ASTM D5185m 0 | <b>133</b>   | 79       | 39       |
| Manganese  | ppm    | ASTM D5185m   | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 0 | <b>542</b>   | 558      | 475      |
| Calcium    | ppm    | ASTM D5185m   | <b>1668</b>  | 1808     | 1633     |
| Phosphorus | ppm    | ASTM D5185m   | <b>782</b>   | 798      | 721      |
| Zinc       | ppm    | ASTM D5185m   | <b>933</b>   | 974      | 872      |
| Sulfur     | ppm    | ASTM D5185m   | <b>2565</b>  | 3093     | 2314     |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>8</b>     | 7        | 6        |
| Sodium    | ppm    | ASTM D5185m     | <b>▲ 587</b> | ▲ 231    | 4        |
| Potassium | ppm    | ASTM D5185m >20 | <b>10</b>    | 3        | <1       |
| Glycol    | %      | *ASTM D2982     | <b>NEG</b>   | NEG      | NEG      |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.3</b>  | 0.3      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>7.6</b>  | 7.5      | 7.0      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>23.3</b> | 22.7     | 22.3     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>20.7</b> | 20.6     | 20.4     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.4  | <b>10.8</b> | 10.5     | 9.8      |







# OIL ANALYSIS REPORT

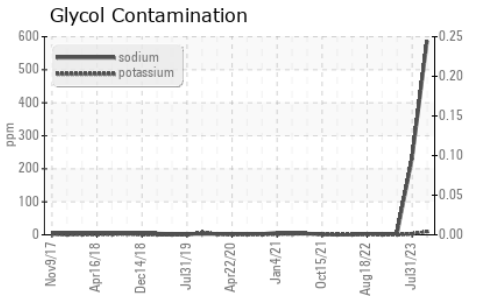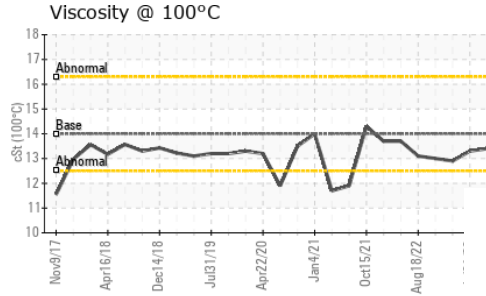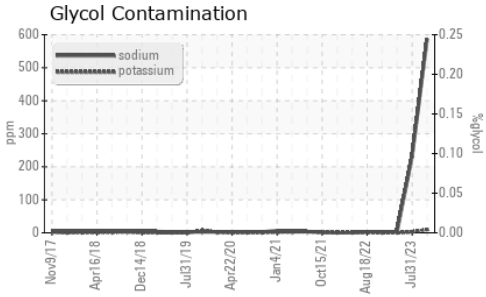

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14      | 13.4     | 13.3     |

## GRAPHS

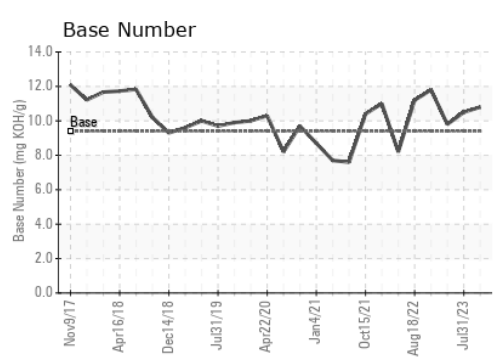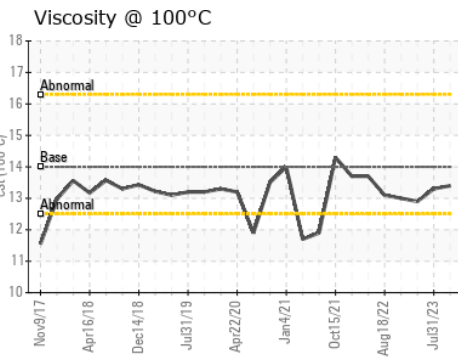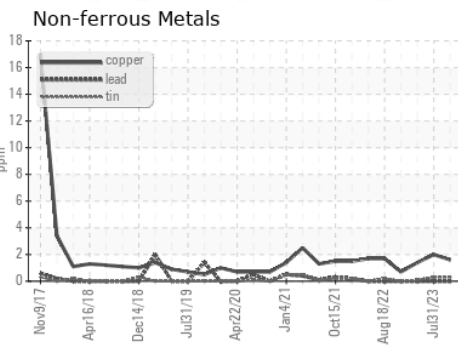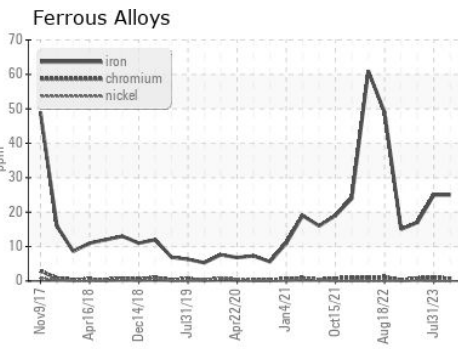

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859602 **Received** : 22 Nov 2023  
**Lab Number** : 06015617 **Diagnosed** : 27 Nov 2023  
**Unique Number** : 10754761 **Diagnostician** : Jonathan Hester  
**Test Package** : CONST ( Additional Tests: Glycol, TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)