



PROBLEM SUMMARY



Machine Id
CATERPILLAR 140M2 - BEATRICE WEST 31260 (S/N 0R9G00196)
 Component
1 Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (33 QTS)

Sample Rating Trend




FUEL




COMPONENT CONDITION SUMMARY

Fuel Dilution

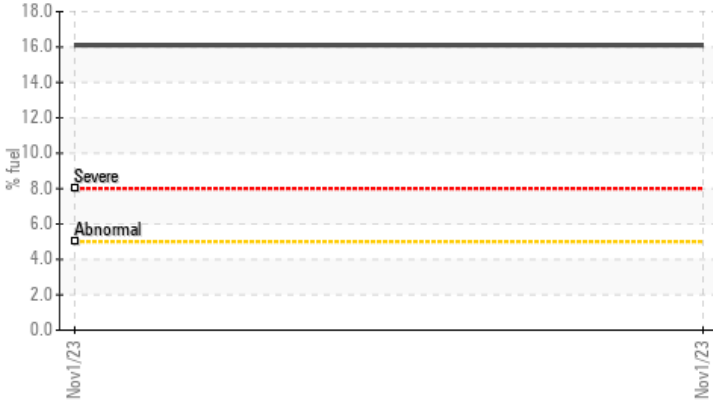

Viscosity @ 100°C

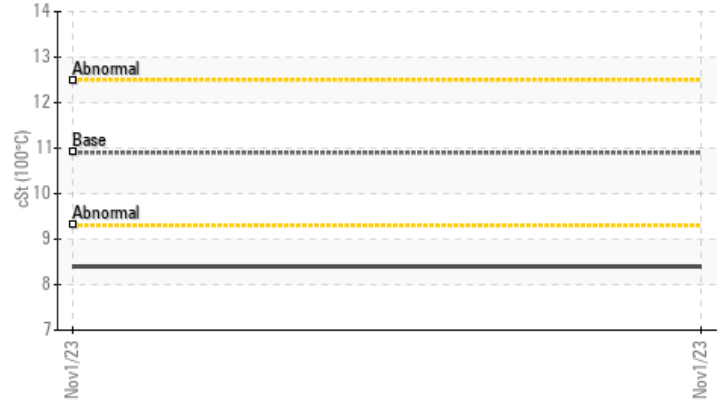

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Fuel	%	ASTM D3524	>5	16.1	---	---
Visc @ 100°C	cSt	ASTM D445	10.9	8.4	---	---

Customer Id: GAGBEA
 Sample No.: SBP0005803
 Lab Number: 06015701
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
CATERPILLAR 140M2 - BEATRICE WEST 31260 (S/N 0R9G00196)
 Component
1 Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (33 QTS)

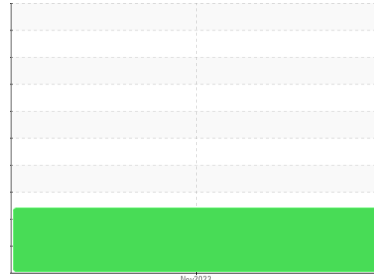

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0005803	---	---
Sample Date	Client Info		01 Nov 2023	---	---
Machine Age	hrs	Client Info	15555	---	---
Oil Age	hrs	Client Info	237	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >2	0	---	---
Titanium	ppm	ASTM D5185m >2	0	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >25	2	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	2	---	---
Tin	ppm	ASTM D5185m >15	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	19	---	---
Barium	ppm	ASTM D5185m 10	0	---	---
Molybdenum	ppm	ASTM D5185m 100	37	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m 450	561	---	---
Calcium	ppm	ASTM D5185m 3000	1250	---	---
Phosphorus	ppm	ASTM D5185m 1150	753	---	---
Zinc	ppm	ASTM D5185m 1350	894	---	---
Sulfur	ppm	ASTM D5185m 4250	2273	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---
Fuel	%	ASTM D3524 >5	16.1	---	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624 >20	7.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.2	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.2	---	---







OIL ANALYSIS REPORT

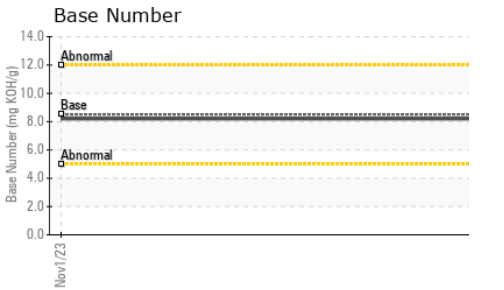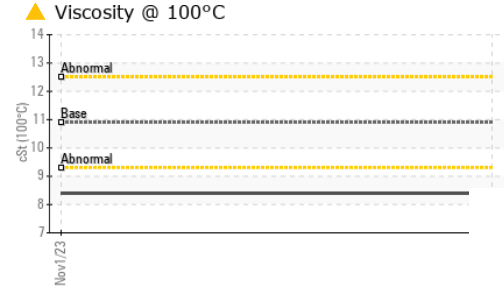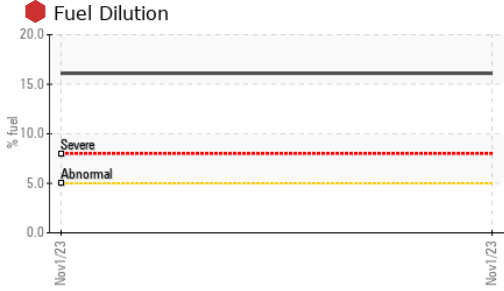

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	▲ 8.4	---	---

GRAPHS

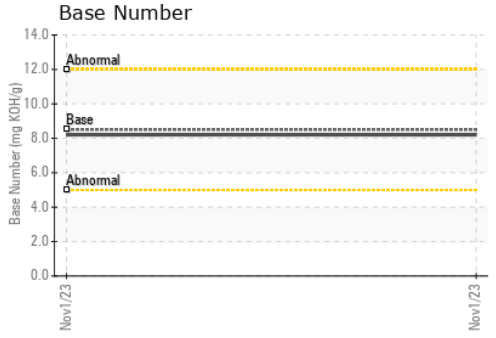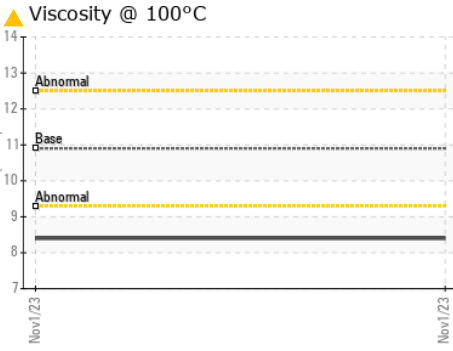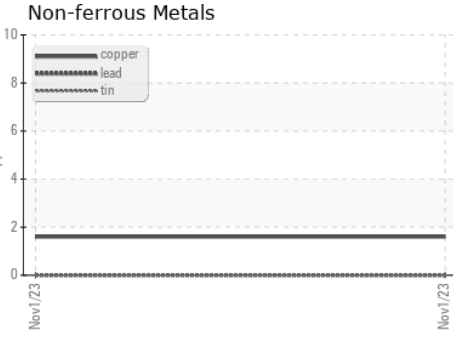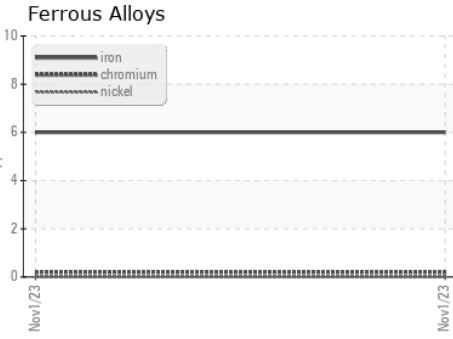

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005803 **Received** : 22 Nov 2023
Lab Number : 06015701 **Diagnosed** : 27 Nov 2023
Unique Number : 10754845 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GAGE COUNTY HIGHWAY DEPARTMENT
 823 SOUTH 8TH ST
 BEATRICE, NE
 US 68310
 Contact: MARK KUHNKE
 mkuhnke@gagecountyne.gov
 T: (402)223-1395
 F: (402)223-1351

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)