




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

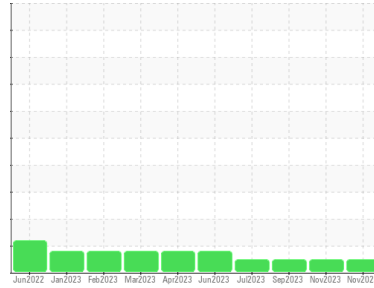

Area  
**HOTLINE/120 MILL**  
 Machine Id  
**120 QUICK ROLL CHANGE 120 QUICK ROLL CHANGE**  
 Component  
**Hydraulic System**  
 Fluid  
**QUAKER CHEMICAL QUINTOLUBRIC 888-46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0005200</b>	KFS0004822	KFS0004885
Sample Date	Client Info	<b>20 Nov 2023</b>	10 Nov 2023	29 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>30</b>	37	29
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >20	<b>282</b>	270	277
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>0</b>	<1	0
Calcium	ppm	ASTM D5185m	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185m	<b>99</b>	104	95
Zinc	ppm	ASTM D5185m	<b>0</b>	21	7
Sulfur	ppm	ASTM D5185m	<b>624</b>	622	670

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>2</b>	1	2
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Water	%	ASTM D6304 >0.05	<b>NEG</b>	NEG	NEG





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>981</b>	4183	1981
Particles >6µm	ASTM D7647 >1300	<b>168</b>	1082	406
Particles >14µm	ASTM D7647 >160	<b>19</b>	103	16
Particles >21µm	ASTM D7647 >40	<b>7</b>	28	2
Particles >38µm	ASTM D7647 >10	<b>1</b>	1	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>17/15/11</b>	19/17/14	18/16/11

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>3.24</b>	3.55	0.35


# OIL ANALYSIS REPORT

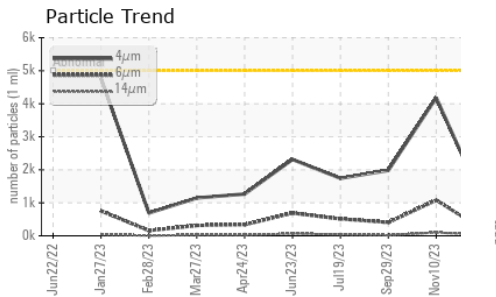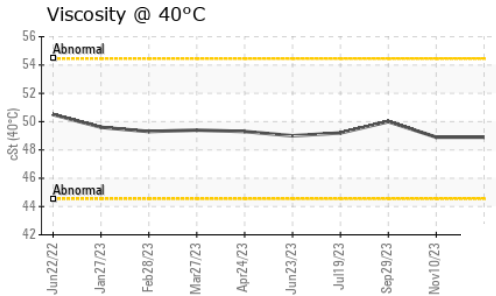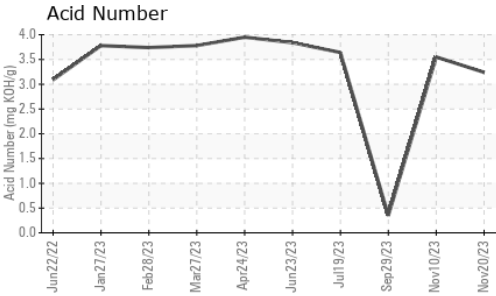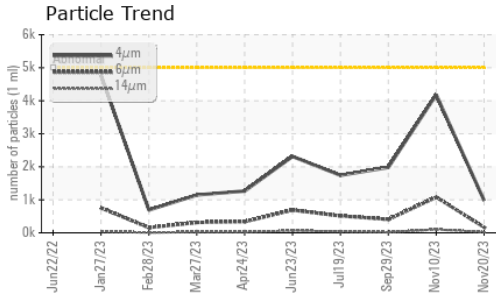






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	48.9	48.9	50.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

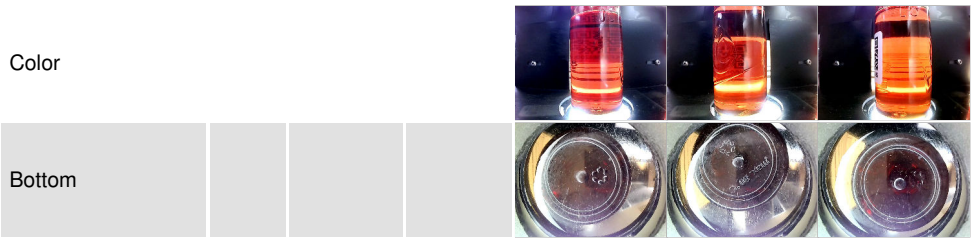

## GRAPHS

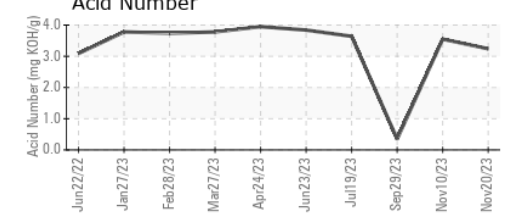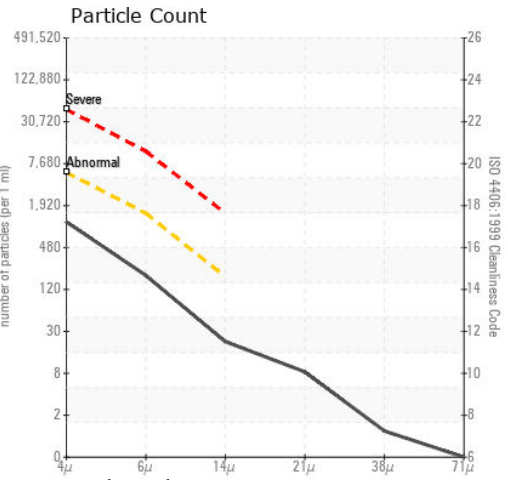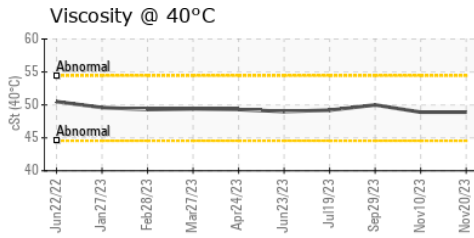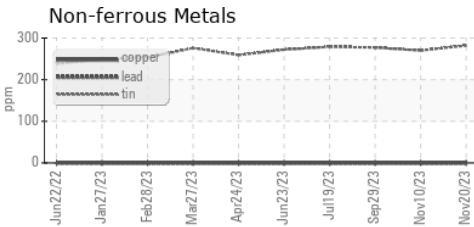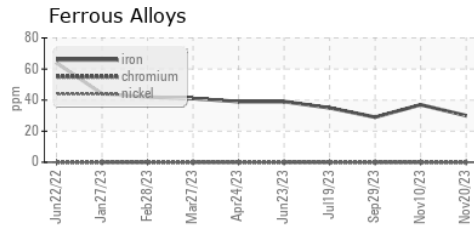

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0005200 **Received** : 22 Nov 2023  
**Lab Number** : 06015776 **Diagnosed** : 27 Nov 2023  
**Unique Number** : 10754920 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**CONSTELLIUM**  
 4805 SECOND STREET  
 MUSCLE SHOALS, AL  
 US 35661  
 Contact: Randy Nichols  
 randall.nichols@constellium.com  
 T: (256)386-6956  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)