

FUEL REPORT

[PM02807750] JOHN DEERE 9.0L 2153374

Component **Diesel Fuel**

NOT GIVEN (--- GAL)

Sample Rating Trend **NORMAL**

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

| | | | | Nov2023 | | |
|---------------|----------|-------------|------------|-------------|----------|----------|
| SAMPLE INFO | RMATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | DC0032588 | | |
| Sample Date | | Client Info | | 08 Nov 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Sample Status | | | | NORMAL | | |
| PHYSICAL PRO | OPERTIES | method | limit/base | current | history1 | history2 |
| ASTM Color | scalar | *ASTM D1500 | | L4.0 | | |
| Visc @ 40°C | cSt | ASTM D445 | | 2.53 | | |
| SULFUR CONT | TENT | method | limit/base | current | history1 | history2 |
| Sulfur | ppm | ASTM D5185m | | 17 | | |
| Sulfur (UVF) | ppm | ASTM D5453 | | 24 | | |
| IGNITION QUA | LITY | method | limit/base | current | history1 | history2 |
| API Gravity | | ASTM D7777 | | 36.8 | | |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | <1.0 | 0 | | |
| Sodium | ppm | ASTM D5185m | <0.1 | <1 | | |
| Potassium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Water | % | ASTM D6304 | < 0.05 | 0.004 | | |
| ppm Water | ppm | ASTM D6304 | <500 | 46 | | |
| % Gasoline | % | *In-House | < 0.50 | 0.0 | | |
| % Biodiesel | % | *In-House | <20.0 | 0.0 | | |
| HEAVY METAL | .S | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | < 0.1 | 0 | | |
| Nickel | ppm | ASTM D5185m | <0.1 | 0 | | |
| Lead | ppm | ASTM D5185m | <0.1 | 0 | | |
| Vanadium | ppm | ASTM D5185m | < 0.1 | 0 | | |
| Iron | ppm | ASTM D5185m | <0.1 | 0 | | |
| Calcium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Magnesium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | <0.1 | 0 | | |
| Zinc | ppm | ASTM D5185m | <0.1 | 0 | | |
| SAMPLE IMAG | ES | method | limit/base | current | history1 | history2 |
| Color | | | | | no image | no image |
| Bottom | | | | | no image | no image |



FUEL REPORT

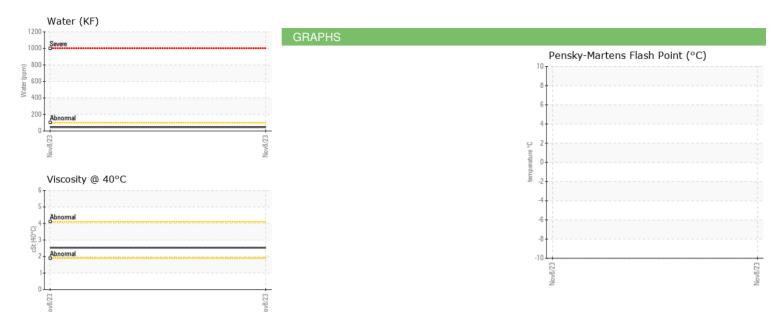



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10755124

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : DC0032588 : 06015980

Received Diagnosed

: 22 Nov 2023 : 13 Dec 2023 Diagnostician : Doug Bogart **Test Package**: DF-5 (Additional Tests: API, Cetane, Fuel, Screen) **KELLY GENERATOR & EQUIPMENT INC** 1955 DALE LN OWINGS, MD US 20736

Contact: LESLIE SNURR LSNURR@KGE.COM T: (410)257-5225 F: (410)257-5227

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)