


# PROBLEM SUMMARY

Sample Rating Trend



## SEDIMENT

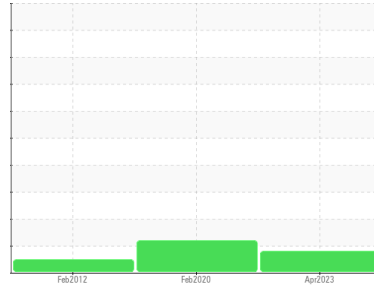

Machine Id  
**H-01**  
Component  
**Wind Turbine Gearbox**  
Fluid  
**ROYAL PURPLE SYNFILM GT 320 (65 GAL)**

### COMPONENT CONDITION SUMMARY

No relevant graphs to display

### RECOMMENDATION

Replace filter element and resample at later date. In case already attempted and cleanliness was not improved then proceed to replace oil. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	NORMAL
Silt	scalar	*Visual	NONE	<b>▲ HEAVY</b>	NONE	NONE

**Customer Id:** MITWHI  
**Sample No.:** MHI021593  
**Lab Number:** 06016368  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	Replace filter element and resample at later date. In case already attempted and cleanliness was not improved then proceed to replace oil.
Resample	---	---	?	Replace filter element and resample at later date. In case already attempted and cleanliness was not improved then proceed to replace oil.
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

### 14 Feb 2020 Diag: Don Baldrige

ISO



Replace filter element and resample at later date. In case already attempted and cleanliness was not improved then proceed to replace oil. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid.

view report



### 14 Feb 2012 Diag: Doug Bogart

NORMAL




Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The condition of oil is suitable for further service.

view report



# OIL ANALYSIS REPORT

## Sample Rating Trend

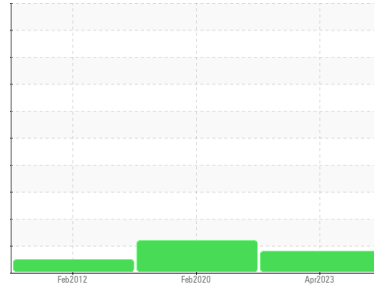

## SEDIMENT



Machine Id  
**H-01**  
Component  
**Wind Turbine Gearbox**  
Fluid  
**ROYAL PURPLE SYNFILM GT 320 (65 GAL)**

### DIAGNOSIS

#### ▲ Recommendation

Replace filter element and resample at later date. In case already attempted and cleanliness was not improved then proceed to replace oil. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a moderate amount of visible silt present in the sample.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>MHI021593</b>	MHI023830	RP107352
Sample Date	Client Info		<b>27 Apr 2023</b>	14 Feb 2020	14 Feb 2012
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>200	<b>12</b>	30	19.0	
Iron	ppm	ASTM D5185m	>200	<b>10</b>	21	7
Chromium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	0	<1
Lead	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>2</b>	15	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	4	67
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	90	<b>57</b>	1	68
Calcium	ppm	ASTM D5185m		<b>1</b>	<1	0
Phosphorus	ppm	ASTM D5185m		<b>0</b>	25	323
Zinc	ppm	ASTM D5185m		<b>0</b>	0	74
Sulfur	ppm	ASTM D5185m		<b>22918</b>	12856	16736





### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>+30	<b>4</b>	2	0
Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water	%	ASTM D6304	>0.1	<b>0.016</b>	0.003	0.008
ppm Water	ppm	ASTM D6304	>1000	<b>161</b>	27.5	80

### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>---</b>	77682	897
Particles >6µm	ASTM D7647	>5000	<b>---</b>	▲ 16424	488
Particles >14µm	ASTM D7647	>640	<b>---</b>	▲ 811	83
Particles >21µm	ASTM D7647	>160	<b>---</b>	▲ 203	28
Particles >38µm	ASTM D7647	>40	<b>---</b>	5	4
Particles >71µm	ASTM D7647	>10	<b>---</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/19/16	<b>---</b>	▲ 23/21/17	17/16/14

# OIL ANALYSIS REPORT

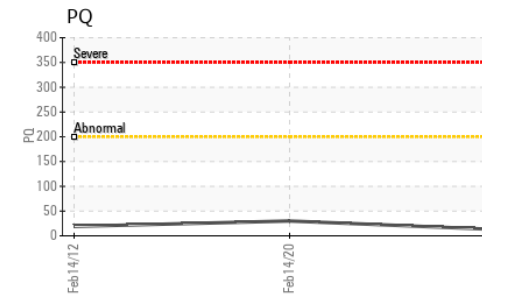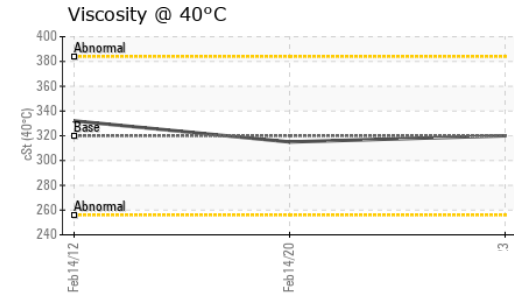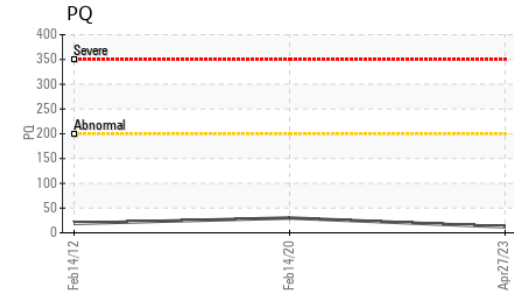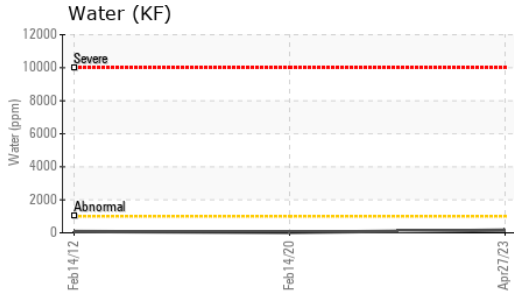


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	<b>0.36</b>	0.394	0.405





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>▲ HEAVY</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	<b>320</b>	315	332.0

## SAMPLE IMAGES

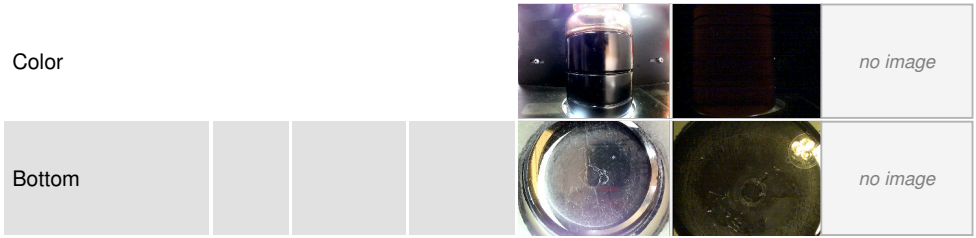

## GRAPHS

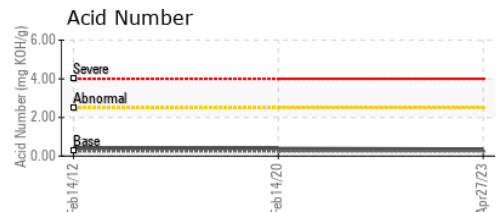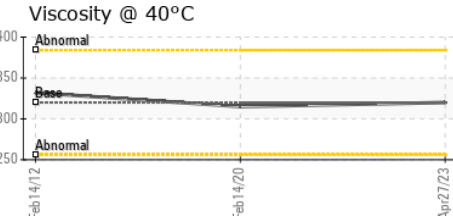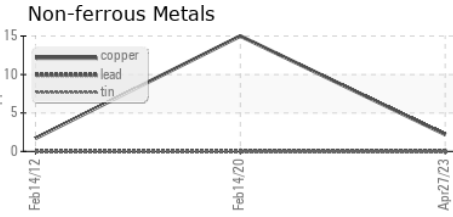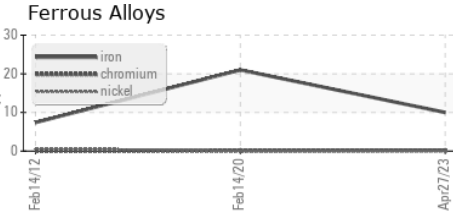

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MH1021593 **Received** : 24 Nov 2023  
**Lab Number** : 06016368 **Diagnosed** : 28 Nov 2023  
**Unique Number** : 10755512 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, PQ, PrtCount )

**DIAMOND WTG - WHITE DEER SITE - MPS WD**  
 PO BOX 872  
 WHITE DEER, TX  
 US 79097  
 Contact: WESLEY CAMPBELL  
 wesley.campbell@diamondwtg.com  
 T: (806)883-1051  
 F: (806)883-2004

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)