

Sample Rating Trend



#### Machine Id **E-13** Component **Hydraulic System** Fluid **MOBIL DTE 10 EXCEL 32 (45 GAL)**

#### DIAGNOSIS

DIAMOND WTG

ENGINEERING & SERVICES, INC.

### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI021606	MHI022647	RP107434
Sample Date		Client Info		14 Apr 2023	06 Apr 2020	17 Jan 2012
Machine Age	hrs	Client Info		0	0	58882
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	MARGINAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	22	10	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	<1
Lead	ppm	ASTM D5185m	>20	- <1	2	<1
Copper	ppm	ASTM D5185m	>20	<1	1	3
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m	~=		<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium		ASTM D5185m		<1	0	0
	ppm			<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		5	5	<1
Calcium	ppm	ASTM D5185m	120	124	140	117
Phosphorus	ppm	ASTM D5185m	475	375	450	624
Zinc	ppm	ASTM D5185m		19	37	67
Sulfur	ppm	ASTM D5185m	1275	1666	1334	1361
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	1	5	<1
Sodium	ppm	ASTM D5185m		1	2	2
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.1	0.012	0.004	0.004
ppm Water	ppm	ASTM D6304	>1000	120	44.6	40
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3803		12130
Particles >6µm		ASTM D7647	>1300	167		<b>1</b> 669
Particles >14µm		ASTM D7647	>160	10		27
Particles >21µm		ASTM D7647	>40	3		7
Particles >38µm		ASTM D7647	>10	0		2
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/15/10		▲ 21/18/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.159	0.157	0.208
	ing NOT //g	A01101 D0040	0	0.159		

Report Id: MITWHI [WUSCAR] 06016390 (Generated: 11/29/2023 19:30:42) Rev: 1

Contact/Location: WESLEY CAMPBELL - MITWHI



# **OIL ANALYSIS REPORT**

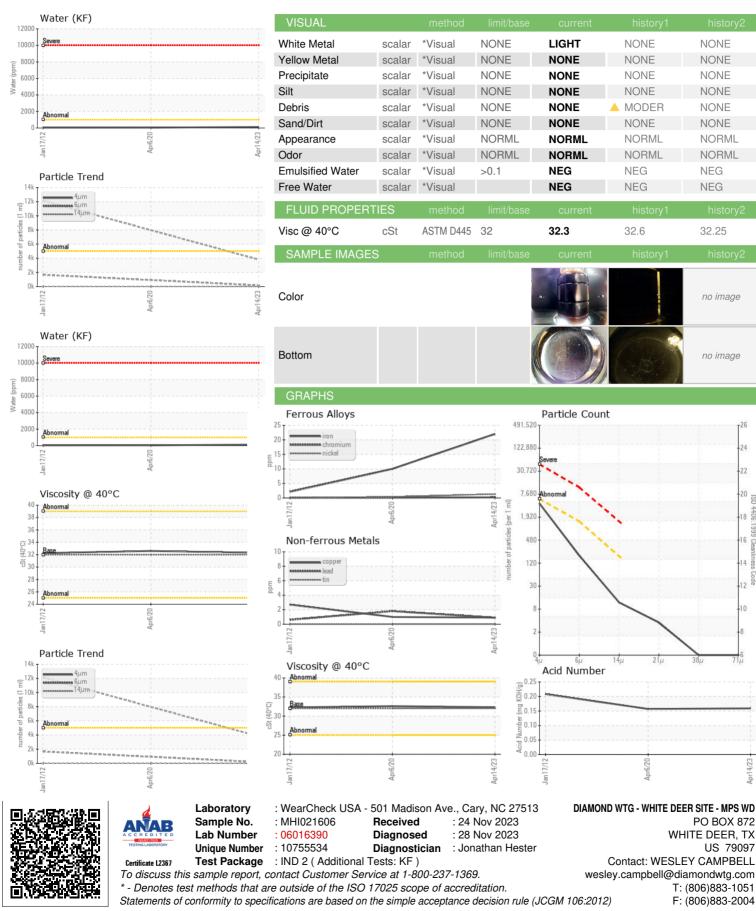

Contact/Location: WESLEY CAMPBELL - MITWHI

PO BOX 872

US 79097

WHITE DEER, TX

T: (806)883-1051

F: (806)883-2004

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

32.25

no image

no image

4406

:1999 Cle