


PROBLEM SUMMARY




KAESER 7361337 (S/N 2592)

Compressor

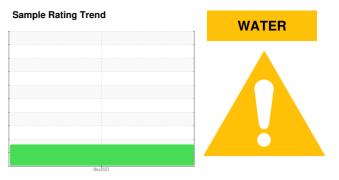

COMPONENT CONDITION SUMMARY

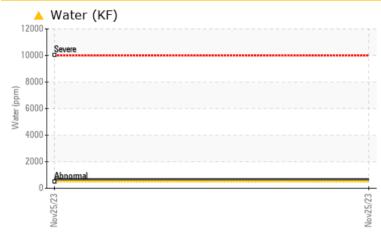

RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count on this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC 7	FEST RE	SULTS			
Sample Status				ABNORMAL	
Water	%	ASTM D6304	>0.05	0.065	
ppm Water	ppm	ASTM D6304	>500	650	

Customer Id: GRAIRVCA Sample No.: KCPA007155 Lab Number: 06016422 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>


To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDE	ED ACTIONS			
Action	Status	Date	Done By	Description
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



WATER

KAESER 7361337 (S/N 2592)

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

A Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count on this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007155		
Sample Date		Client Info		25 Nov 2023		
Machine Age	hrs	Client Info		22828		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	29		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1	history2
	ppm ppm		limit/base 90			
Boron		ASTM D5185m		0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m		0 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		0 0 <1		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90	0 0 <1 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90	0 0 <1 <1 10		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90	0 0 <1 <1 10 1	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90	0 0 <1 <1 10 1 0	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90	0 0 <1 <1 10 1 0 26		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90 2	0 0 <1 <1 10 1 0 26 21483		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	90 90 2 limit/base	0 0 <1 (1 10 1 0 26 21483 current	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	90 90 2 limit/base	0 0 <1 <1 10 1 0 26 21483 current 2	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	90 90 2 2 limit/base >25	0 0 <1 <1 10 1 0 26 21483 current 2 <	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	90 90 2 limit/base >25 >20	0 0 <1 <1 10 1 0 26 21483 current 2 <1 1	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	90 90 2 2 <u>limit/base</u> >25 >20 >0.05	0 0 <1 <1 10 1 0 26 21483 current 2 <1 1 0 0 26 21483 current 2 <1 1 0 0 26 21 21 20 21 20 20 21 20 20 20 20 20 20 20 20 20 20	 history1	 history2




OIL ANALYSIS REPORT

VISUAL

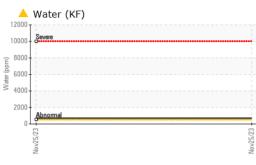

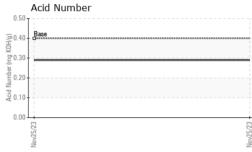



	White Metal	scalar	*Visual	NONE	MODER		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water		*Visual	>0.05	0.2%		
	Free Water	scalar	*Visual		NEG		
****	FLUID PROPE		mathad	limit/base	ourroat	historyd	history 0
			method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	46	44.8		
	SAMPLE IMAC	GES	method	limit/base	current	history1	history2
	EZ Color					no image	no image
	Bottom					no image	no image
	Non-ferrous Ma 20 20 20 20 20 20 20 20 20 20			Mov25/23	Acid Number		
	Viscosity @ 40			EZJSZNON (0/H0 0.4	Base		
	Non-ferrous Me 20 20 20 20 20 20 20 20 20 20 20 20 20			EZJSZNON (0/H0 0.4	Base		
	Non-ferrous Me 20 20 20 20 20 20 20 20 20 20			EZJSZNON (0/H0 0.4	Base		
	Non-ferrous Me copper lead 10 0 CCCCCC Viscosity @ 40 Viscosity @ 40 CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC			Acid Number (ng KDH/Q) 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.	0		
Laborator Sample N Lab Numi	ry : WearCheck USA ber : 06016422 mber : 10755566	°C A - 501 Madia Received Diagnost	d : 24 ed : 28 tician : Jon	Nov252723 Nov257273 Nov25777 Nov25777 Nov25777 Nov257777 Nov257777 Nov257777 Nov2577777 Nov25777777777777777777777777777777777777	3 GRAPHIC	1600 BAR	NTERNATIONA RANCA PKWY IRVINE, C/ US 9260
Sample N Lab Numl Unique Nur ficate L2367 Test Pack	ry : WearCheck USA ber : 06016422 mber : 10755566	°C A - 501 Madia Received Diagnost Diagnost al Tests: KF,	d : 24 ed : 28 tician : Jon PrtCount)	EZISTONN (0,405 (0,400 (0,4	3 GRAPHIC	1600 BAR	NTERNATIONA RANCA PKW IRVINE, C

limit/base

current

method

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Page 4 of 4

history2

history1