


## **PROBLEM SUMMARY**

## KAESER 7499591

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

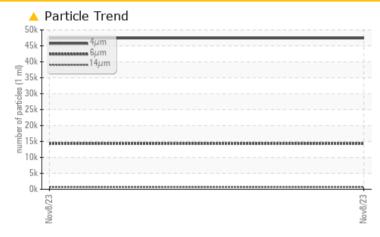

#### RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# PROBLEMATIC TEST RESULTS Sample Status ABNORMAL -- -- Particles >6µm ASTM D7647 >1300 ▲ 14312 -- -- Particles >14µm ASTM D7647 >80 ▲ 662 -- -- Particles >21µm ASTM D7647 >20 ▲ 149 -- -- Oil Cleanliness ISO 4406 (c) >--/17/13 ▲ 23/21/17 -- --


Customer Id: AMAMORCAL Sample No.: KCPA009410 Lab Number: 06016425 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

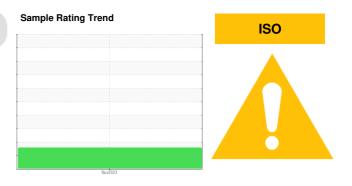

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**



ISO

KAESER 7499591

### Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM    | IATION   | method       | limit/base | current           | history1 | history2 |
|------------------|----------|--------------|------------|-------------------|----------|----------|
| Sample Number    |          | Client Info  |            | KCPA009410        |          |          |
| Sample Date      |          | Client Info  |            | 08 Nov 2023       |          |          |
| Machine Age      | hrs      | Client Info  |            | 52252             |          |          |
| Oil Age          | hrs      | Client Info  |            | 0                 |          |          |
| Oil Changed      |          | Client Info  |            | N/A               |          |          |
| Sample Status    |          |              |            | ABNORMAL          |          |          |
| WEAR METALS      |          | method       | limit/base | current           | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >50        | <1                |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | <1                |          |          |
| Nickel           | ppm      | ASTM D5185m  | >3         | <1                |          |          |
| Titanium         | ppm      | ASTM D5185m  | >3         | <1                |          |          |
| Silver           | ppm      | ASTM D5185m  | >2         | 0                 |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 2                 |          |          |
| Lead             | ppm      | ASTM D5185m  | >10        | 0                 |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | 9                 |          |          |
| Tin              | ppm      | ASTM D5185m  | >10        | 0                 |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | <1                |          |          |
| ADDITIVES        |          | method       | limit/base | current           | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Barium           | ppm      | ASTM D5185m  | 90         | 66                |          |          |
| Molybdenum       | ppm      | ASTM D5185m  | 0          | <1                |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Magnesium        | ppm      | ASTM D5185m  | 100        | 79                |          |          |
| Calcium          | ppm      | ASTM D5185m  | 0          | 4                 |          |          |
| Phosphorus       | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Zinc             | ppm      | ASTM D5185m  | 0          | 0                 |          |          |
| Sulfur           | ppm      | ASTM D5185m  | 23500      | 22833             |          |          |
| CONTAMINANTS     |          | method       | limit/base | current           | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >25        | 1                 |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 22                |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 10                |          |          |
| Water            | %        | ASTM D6304   | >0.05      | 0.027             |          |          |
| ppm Water        | ppm      | ASTM D6304   | >500       | 273               |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current           | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 47384             |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | <u> </u>          |          |          |
| Particles >14µm  |          | ASTM D7647   | >80        | <u> </u>          |          |          |
| Particles >21µm  |          | ASTM D7647   | >20        | <u> </u>          |          |          |
| Particles >38µm  |          | ASTM D7647   | >4         | 3                 |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0                 |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | <b>4</b> 23/21/17 |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current           | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 1.0        | 0.27              |          |          |





## **OIL ANALYSIS REPORT**



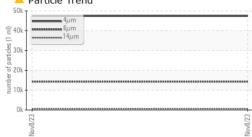

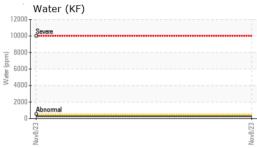

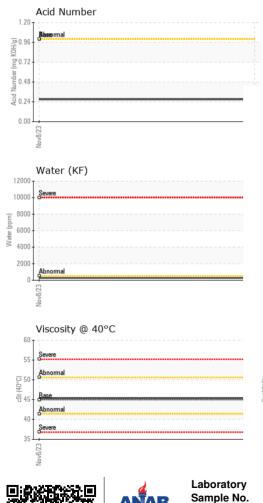

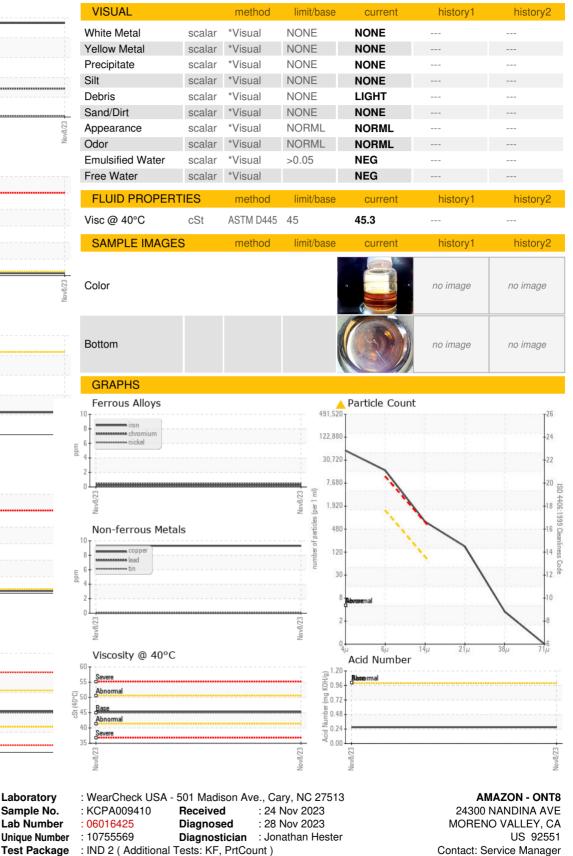

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367