


### **PROBLEM SUMMARY**

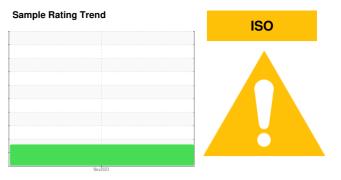


# KAESER 7544685 (S/N 1277)

Compressor Fluid

### KAESER SIGMA (OEM) S-460 (--- GAL)

### COMPONENT CONDITION SUMMARY

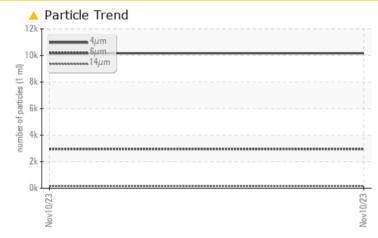

### RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	
Particles >6µm	ASTM D7647 >130	00 🔺 2958	
Particles >14µm	ASTM D7647 >80	<u> </u>	
Particles >21µm	ASTM D7647 >20	<u> </u>	
Oil Cleanliness	ISO 4406 (c) >/1	7/13 🔺 21/19/14	

Customer Id: GRAIRVCA Sample No.: KCPA007157 Lab Number: 06016427 Test Package: IND 2



To manage this report scan the QR code


*To discuss the diagnosis or test data:* Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**



ISO

# KAESER 7544685 (S/N 1277)

**Compressor** 

KAESER SIGMA (OEM) S-460 (--- GAL)

### DIAGNOSIS

### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007157		
Sample Date		Client Info		10 Nov 2023		
Machine Age	hrs	Client Info		22687		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m		14		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m	210	0		
Cadmium	ppm	ASTM D5185m		۰ <1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	9		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m	-	0		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		22261		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	101		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		10169		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<b></b> 149		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	1		
		ASTM D7647	>3	0		
Particles >71um				-		
		ISO 4406 (c)	>/17/13	<u> </u>		
Particles >71µm Oil Cleanliness FLUID DEGRADA		ISO 4406 (c) method	>/17/13 limit/base	21/19/14 current	 history1	 history2




Built for a lifetime."

## **OIL ANALYSIS REPORT**

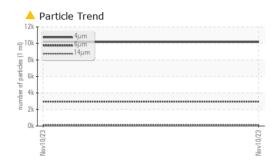

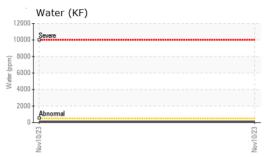

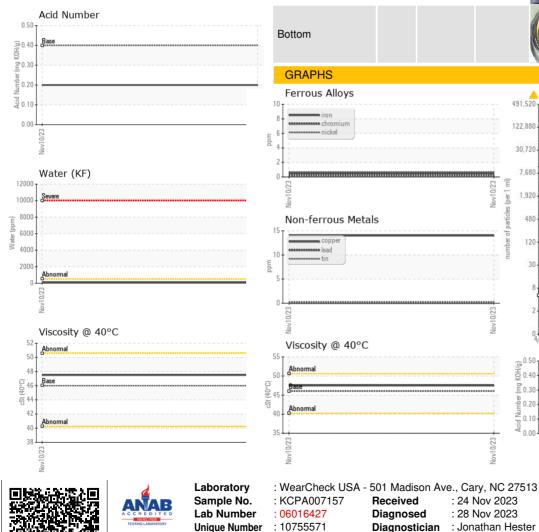

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar scalar	*Visual *Visual	NORML >0.05	NORML NEG		
Free Water	scalar	*Visual	>0.05	NEG		
			line it /le e e e			
FLUID PROPERT		method ASTM D445	limit/base	current	history1	history2
Visc @ 40°C	cSt		46	47.5		
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			_	Particle Count		0.000
I iron 1			491,520	I		T <sup>26</sup>
8 chromium 6 mickel			122,880	+		-24
4			30,720			-22
2						
				1		-20
Nov10/23			Nov10/23 (per 1 m			-18
≝ Non-ferrous Metal			No Icles (I			
Non-rerrous Merai						110
	S		of balance		\ \	-16
5 copper	S		to age 120			-14
5 copper	S		of ba			-16 -14 -12
0 - copper lead	s		30			=12
5 - Copper lead 5 - S	s					-16 -14 -12 -10
copper lead	s		8	Bioreemal		=12
5 - Copper lead 5 - S	s		8	- Bioresemal		
Viscosity @ 40°C	S		8	Bibreemal	14μ 21μ	10
Viscosity @ 40°C	s		8 8 8 8 7 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	
Viscosity @ 40°C	S		8 8 8 8 7 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	
S copper lead	S		8 8 8 8 7 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	
Viscosity @ 40°C	S		8 8 8 8 7 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	
Viscosity @ 40°C	S		300 8 8 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	-14 -12 -10 -8 -6
Viscosity @ 40°C	S		8	Bioreemal <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup> <sup>1</sup>	14μ 21μ	

**GRAPHIC PACKAGING INTERNATIONAL** 1600 BARRANCA PKWY IRVINE, CA US 92606 Contact: Service Manager

To dis	scuss this sample report	t, contact Customer	Service at 1-800	)-237-1369.
* 00	notoo toot mathada that	are autoide of the	100 1700E acon	a of accorditati

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

: 24 Nov 2023

: 28 Nov 2023

Diagnostician : Jonathan Hester

Certificate L2367

Contact/Location: Service Manager - GRAIRVCA