| CHECK  | PROBLEM SUMMARY | Sample Rating Trend | VISUAL METAL |
|--|-----------------|---------------------|--------------|
| Machine Id<br><b>C-807</b><br>Component<br><b>Gearbox</b><br>Fluid<br><b>MOBIL SHC 630 ( GAI</b> | L)              | Juni 523 Nord223    |              |
| COMPONENT CONDITION  | SUMMARY         |                     |              |

No relevant graphs to display

| RF | COM | <b>IMEN</b> | JDAT | ION |  |
|----|-----|-------------|------|-----|--|
|    |     |             |      |     |  |

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

| PROBLEMATIC T | EST RE | SULTS   |      |          |          |  |
|---------------|--------|---------|------|----------|----------|--|
| Sample Status |        |         |      | ABNORMAL | ABNORMAL |  |
| White Metal   | scalar | *Visual | NONE | A MODER  | A MODER  |  |

Customer Id: POEHAN Sample No.: USP244919 Lab Number: 06016434 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

| RECOMMENDED ACTIONS |        |      |         |   |  |
|---------------------|--------|------|---------|---|--|
| Action              | Status | Date | Done By | Description   |  |
| Change Filter       |        |      | ?       | We recommend you service the filters on this component if applicable.                     |  |
| Alert               |        |      | ?       | We were unable to perform a particle count due to metal particles present in this sample. |  |

### HISTORICAL DIAGNOSIS

05 Jun 2023 Diag: Doug Bogart



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.Moderate concentration of visible metal present. All component wear rates are normal. No other contaminants were detected in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**

Sample Rating Trend



#### Machine Id C-807 Component Gearbox Fluid MOBIL SHC 630 (--- GAL)

#### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample.

### A Wear

Moderate concentration of visible metal present. All component wear rates are normal.

#### Contamination

No other contaminants were detected in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM   | <b>IATION</b>  | method   | limit/base                       | current  | history1   | history2                     |
|---|--|--|----------------------------------|--|--|------------------------------|
| Sample Number   |  | Client Info  |                                  | USP244919  | USP243199  |                              |
| Sample Date   |  | Client Info  |                                  | 10 Nov 2023  | 05 Jun 2023  |                              |
| Machine Age   | hrs  | Client Info  |                                  | 0  | 0  |                              |
| Oil Age   | hrs  | Client Info  |                                  | 0  | 0  |                              |
| Oil Changed   |  | Client Info  |                                  | N/A  | N/A  |                              |
| Sample Status   |  |  |                                  | ABNORMAL   | ABNORMAL   |                              |
| WEAR METALS   |  | method   | limit/base                       | current  | history1   | history2                     |
| Iron  | ppm  | ASTM D5185m  | >200                             | 1  | 2  |                              |
| Chromium  | ppm  | ASTM D5185m  | >15                              | <1   | 0  |                              |
| Nickel  | ppm  | ASTM D5185m  | >15                              | <1   | 0  |                              |
| Titanium  | ppm  | ASTM D5185m  |                                  | <1   | 0  |                              |
| Silver  | ppm  | ASTM D5185m  |                                  | 0  | 0  |                              |
| Aluminum  | ppm  | ASTM D5185m  | >25                              | 2  | 0  |                              |
| Lead  | ppm  | ASTM D5185m  | >100                             | 0  | 0  |                              |
| Copper  | ppm  | ASTM D5185m  | >200                             | <1   | 0  |                              |
| Tin   | ppm  | ASTM D5185m  | >25                              | 0  | <1   |                              |
| Vanadium  | ppm  | ASTM D5185m  |                                  | 0  | 0  |                              |
| Cadmium   | ppm  | ASTM D5185m  |                                  | <1   | 0  |                              |
|   |  |  |                                  |  |  |                              |
| ADDITIVES   |  | method   | limit/base                       | current  | history1   | history2                     |
| ADDITIVES<br>Boron  | ppm  | method<br>ASTM D5185m  | limit/base                       | current<br>0   | history1<br>0  | history2                     |
|   | ppm<br>ppm   |  | limit/base                       |  |  |                              |
| Boron   |  | ASTM D5185m  | limit/base                       | 0  | 0  |                              |
| Boron<br>Barium   | ppm  | ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br>0   | 0  |                              |
| Boron<br>Barium<br>Molybdenum   | ppm<br>ppm   | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br>0<br><1   | 0<br>0<br>0  |                              |
| Boron<br>Barium<br>Molybdenum<br>Manganese  | ppm<br>ppm<br>ppm  | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br>0<br><1<br><1   | 0<br>0<br>0<br><1  |                              |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium   | ppm<br>ppm<br>ppm<br>ppm   | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br>0<br><1<br><1<br>1  | 0<br>0<br><1<br>0  |                              |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium  | ppm<br>ppm<br>ppm<br>ppm<br>ppm                                    | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br>0<br><1<br><1<br>1<br><1  | 0<br>0<br><1<br>0<br><1  | <br><br>                     |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                             | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   | limit/base                       | 0<br>0<br><1<br><1<br>1<br>1<br><1<br>374  | 0<br>0<br><1<br>0<br><1<br>491   | <br><br><br>                 |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br>0<br><1<br><1<br>1<br>-1<br>374<br>0  | 0<br>0<br><1<br>0<br><1<br>491<br>0  |                              |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m   |                                  | 0<br>0<br><1<br><1<br>1<br><1<br>374<br>0<br>885   | 0<br>0<br><1<br>0<br><1<br>491<br>0<br>956   |                              |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS  | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm                      | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m  | limit/base                       | 0<br>0<br><1<br><1<br>1<br><1<br>374<br>0<br>885<br>current                                  | 0<br>0<br><1<br>0<br><1<br>491<br>0<br>956<br>history1   | <br><br><br><br><br>history2 |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium<br>Potassium          | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm               | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br><b>method</b><br>ASTM D5185m                             | limit/base                       | 0<br>0<br><1<br><1<br>1<br><1<br>374<br>0<br>885<br>current<br>29                            | 0<br>0<br>2<br>3<br>3<br>4<br>9<br>5<br>6<br>4<br>9<br>5<br>6<br>4<br>9<br>5<br>6<br>2<br>6    | <br><br><br><br>history2     |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium                       | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm               | ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br>ASTM D5185m<br><b>method</b><br>ASTM D5185m                             | limit/base >50                   | 0<br>0<br><1<br><1<br>1<br>1<br><1<br>374<br>0<br>885<br><u>current</u><br>29<br>1           | 0<br>0<br>0<br><1<br>0<br><1<br>491<br>0<br>956<br>history1<br>26<br>0                         | <br><br><br><br>history2     |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium<br>Potassium          | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm | ASTM D5185m<br>ASTM D5185m | limit/base<br>>50<br>>20         | 0<br>0<br><1<br><1<br>1<br><1<br>374<br>0<br>885<br><u>current</u><br>29<br>1<br><1          | 0<br>0<br>2<br>3<br>1<br>0<br>3<br>491<br>0<br>956<br><b>history1</b><br>26<br>0<br>0<br>0     | <br><br><br><br><br>history2 |
| Boron<br>Barium<br>Molybdenum<br>Manganese<br>Magnesium<br>Calcium<br>Phosphorus<br>Zinc<br>Sulfur<br>CONTAMINANTS<br>Silicon<br>Sodium<br>Potassium<br>Water | ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm<br>ppm | ASTM D5185m<br>ASTM D5185m | limit/base<br>>50<br>>20<br>>0.2 | 0<br>0<br><1<br><1<br>1<br><1<br>374<br>0<br>885<br><u>current</u><br>29<br>1<br><1<br>0.010 | 0<br>0<br>0<br><1<br>0<br><1<br>491<br>0<br>956<br>history1<br>26<br>0<br>0<br>0<br>0<br>0.005 | <br><br><br><br><br>history2 |



# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

VISUAL


White Metal


Yellow Metal


Precipitate

Silt

Debris

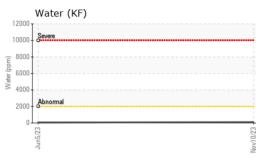

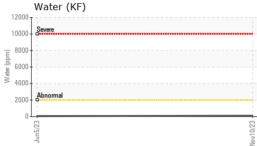

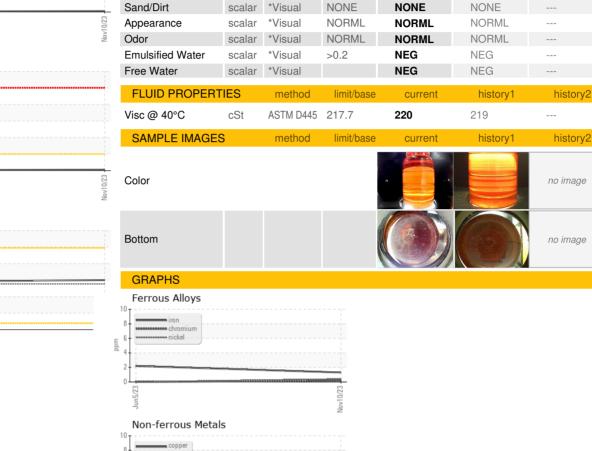

method

\*Visual

\*Visual

\*Visual

\*Visual

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

current

MODER

NONE

NONE

NONE

LIGHT

history1

MODER

NONE

NONE


NONE

NONE

history2





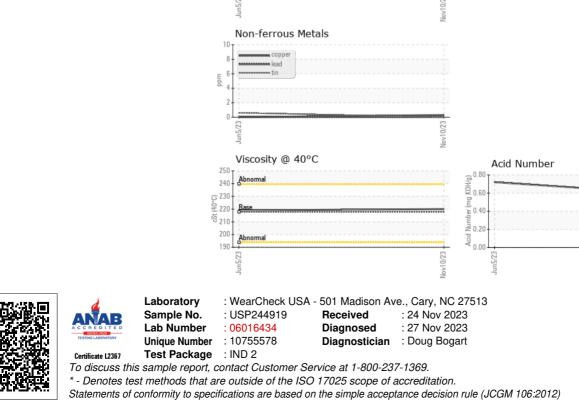

Contact/Location: Service Manager - POEHAN