

PROBLEM SUMMARY


Sample Rating Trend

ISO

COMP 63 (S/N S0017AFMFLHAA3)


Refrigeration Compressor

USPI 1009-68 SC (--- GAL)





COMPONENT CONDITION SUMMARY

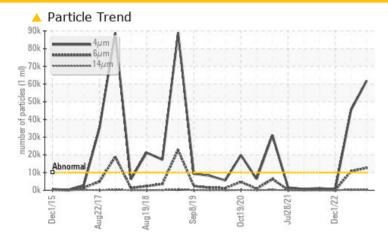

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	NORMAL				
Particles >4µm	ASTM D7647	>10000	61914	<u>▲</u> 45281	448				
Particles >6µm	ASTM D7647	>2500	12624	<u>▲</u> 10721	64				
Particles >14μm	ASTM D7647	>320	△ 382	408	5				
Oil Cleanliness	ISO 4406 (c)	>20/18/15	23/21/16	23/21/16	16/13/10				

Customer Id: TYSTRA Sample No.: USP0003496 Lab Number: 06016451 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter			?	We recommend you service the filters on this component.

HISTORICAL DIAGNOSIS

23 May 2023 Diag: Doug Bogart





We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



01 Dec 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



16 Oct 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



COMP 63 (S/N S0017AFMFLHAA3)

Component

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		ec2015 Au	2017 Aug2018 Sep2	019 Oct2020 Jul2021 D	lec2022	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0003496	USP249524	USP239416
Sample Date		Client Info		15 Nov 2023	23 May 2023	01 Dec 2022
Machine Age	hrs	Client Info		15658	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	2	1	<1
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		<1	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	33
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	1	<1
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	1	0
Water	%	ASTM D6304	>0.01	0.002	0.001	0.002
ppm Water	ppm	ASTM D6304	>100	23	12.8	15.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>	<u>▲</u> 45281	448
Particles >6µm		ASTM D7647	>2500	12624	<u>▲</u> 10721	64
Particles >14µm		ASTM D7647	>320	▲ 382	4 08	5
Particles >21µm		ASTM D7647	>80	63	51	1
Particles >38μm		ASTM D7647	>20	0	2	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	23/21/16	<u>△</u> 23/21/16	16/13/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.014



OIL ANALYSIS REPORT







Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: USP0003496 : 06016451 : 10755595 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 24 Nov 2023 Received Diagnosed : 27 Nov 2023 Diagnostician : Doug Bogart

SARA LEE - TRAVERSE CITY 2314 SYBRANT RD TRAVERSE CITY, MI US 49684

Contact:

T: F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)