




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

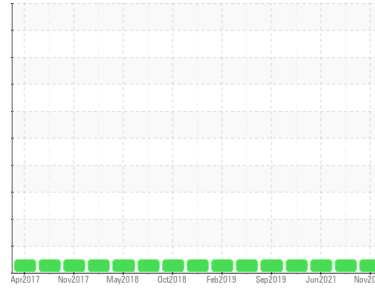

Machine Id
FREIGHTLINER 2420
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (16 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0004866	RW0004108	RW0002400
Sample Date	Client Info		09 Nov 2023	19 Dec 2022	02 Jun 2021
Machine Age	hrs	Client Info	9336	8320	6832
Oil Age	hrs	Client Info	250	1032	240
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >130	17	45	13
Chromium	ppm	ASTM D5185m >10	<1	2	<1
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	6	17	4
Lead	ppm	ASTM D5185m >20	0	0	<1
Copper	ppm	ASTM D5185m >125	<1	2	<1
Tin	ppm	ASTM D5185m >4	<1	<1	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	2	7
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	59	59	59
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	882	761	437
Calcium	ppm	ASTM D5185m	1057	1268	1685
Phosphorus	ppm	ASTM D5185m	1098	981	1036
Zinc	ppm	ASTM D5185m	1229	1160	1265
Sulfur	ppm	ASTM D5185m	3052	2728	2982

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	6	4
Sodium	ppm	ASTM D5185m	2	0	1
Potassium	ppm	ASTM D5185m >20	9	32	5

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.6	1.1	0.6
Nitration	Abs/cm	*ASTM D7624 >20	10.3	12.5	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	24.0	20.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.8	20.6	15.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	10.65	6.86	8.53











OIL ANALYSIS REPORT

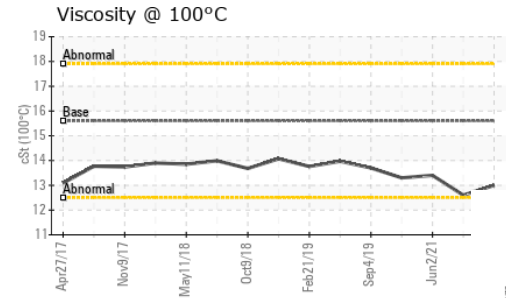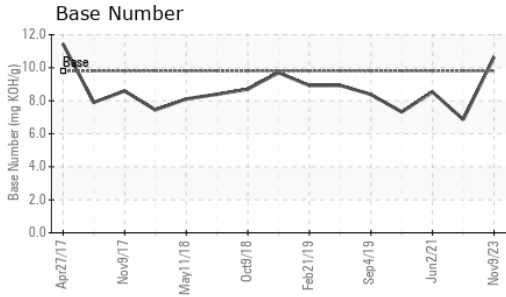

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	13.0	12.6	13.4

GRAPHS

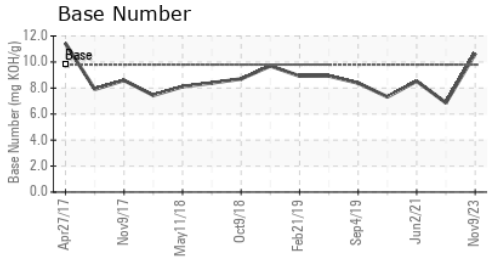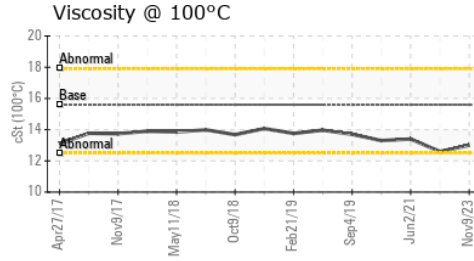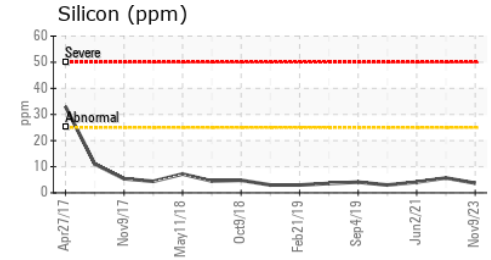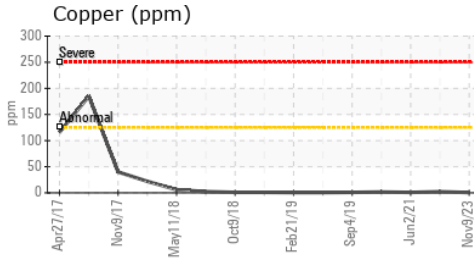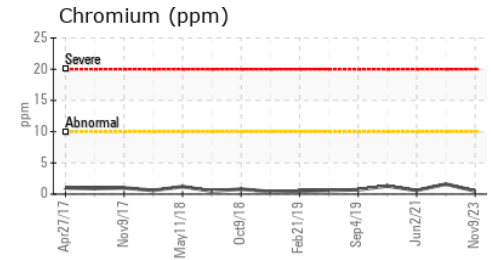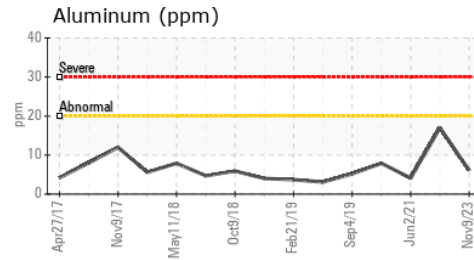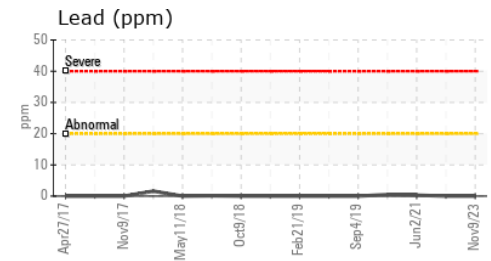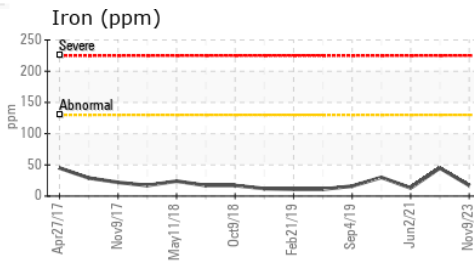

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0004866 **Received** : 24 Nov 2023
Lab Number : 06016656 **Diagnosed** : 28 Nov 2023
Unique Number : 10755800 **Diagnostician** : Wes Davis
Test Package : MOB 2

NEWKIRK ELECTRIC
 1875 ROBERTS ST.
 MUSKEGON, MI
 US 49442
 Contact: ERIC KING
 ewking@newkirk-electric.com
 T: (231)206-6131
 F: (231)724-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)