




# OIL ANALYSIS REPORT

Sample Rating Trend

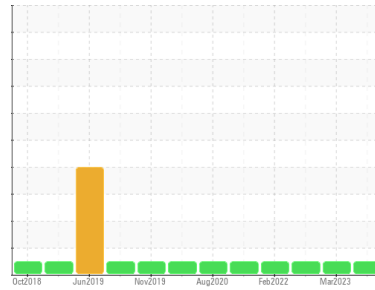

**NORMAL**



Machine Id  
**FSP 604 (S/N 1FVACXD78CDBP7604)**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (18 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0875818</b>	WC0787659	WC0717594
Sample Date	Client Info		<b>16 Nov 2023</b>	10 Mar 2023	02 Nov 2022
Machine Age	mls	Client Info	<b>0</b>	0	279419
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >130	<b>36</b>	18	45
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	3
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	3	3
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >125	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>7</b>	2	5
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>64</b>	62	65
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 450	<b>826</b>	992	955
Calcium	ppm	ASTM D5185m 3000	<b>1141</b>	1147	1122
Phosphorus	ppm	ASTM D5185m 1150	<b>1073</b>	1022	1024
Zinc	ppm	ASTM D5185m 1350	<b>1219</b>	1311	1285
Sulfur	ppm	ASTM D5185m 4250	<b>3245</b>	3675	3712

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m >158	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.6</b>	0.3	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	6.9	11
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	18.9	23

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	14.3	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.4</b>	9.9	9.3







# OIL ANALYSIS REPORT

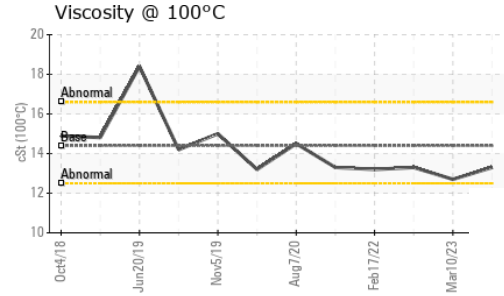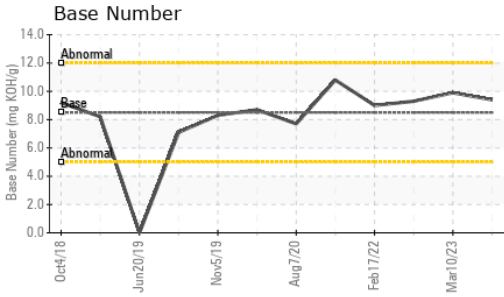

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	12.7	13.3

## GRAPHS

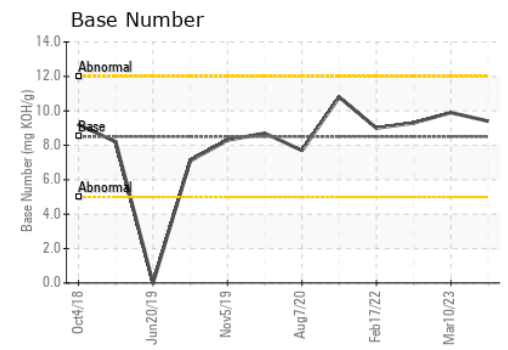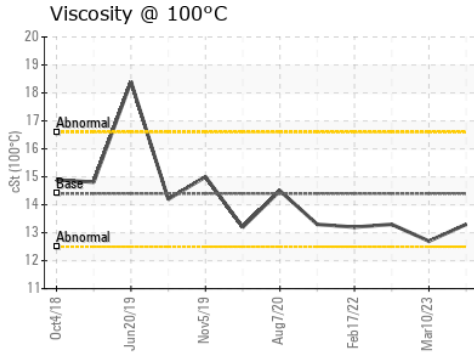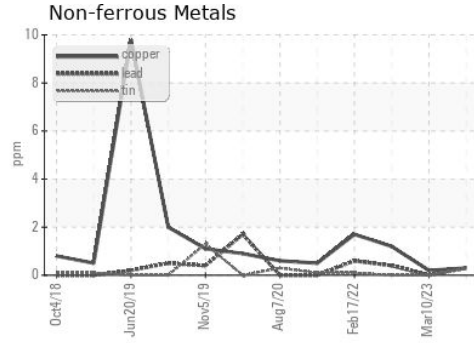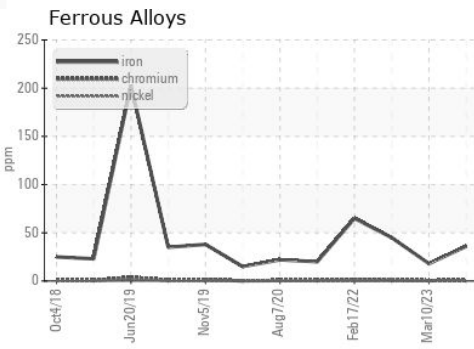

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0875818 **Received** : 24 Nov 2023  
**Lab Number** : **06017051** **Diagnosed** : 28 Nov 2023  
**Unique Number** : 10756195 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**FRESHPOINT**  
 8801 EXCHANGE DRIVE  
 ORLANDO, FL  
 US 32809  
 Contact: CRAIG EVANS  
 evans\_craig@sbcglobal.net

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)